



### Features


- Available in 27 finishes including 12 PVD finishes
- All brass construction
- 5-3/16" spout center to center
- 1/4 turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- ø1-1/4" all brass lift rod style pop up drain assembly
- 1.2 gpm (4.5 L/min) max flow rate



### Codes/Standards

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC & DOE
- EPA WaterSense
- Commonwealth of MA

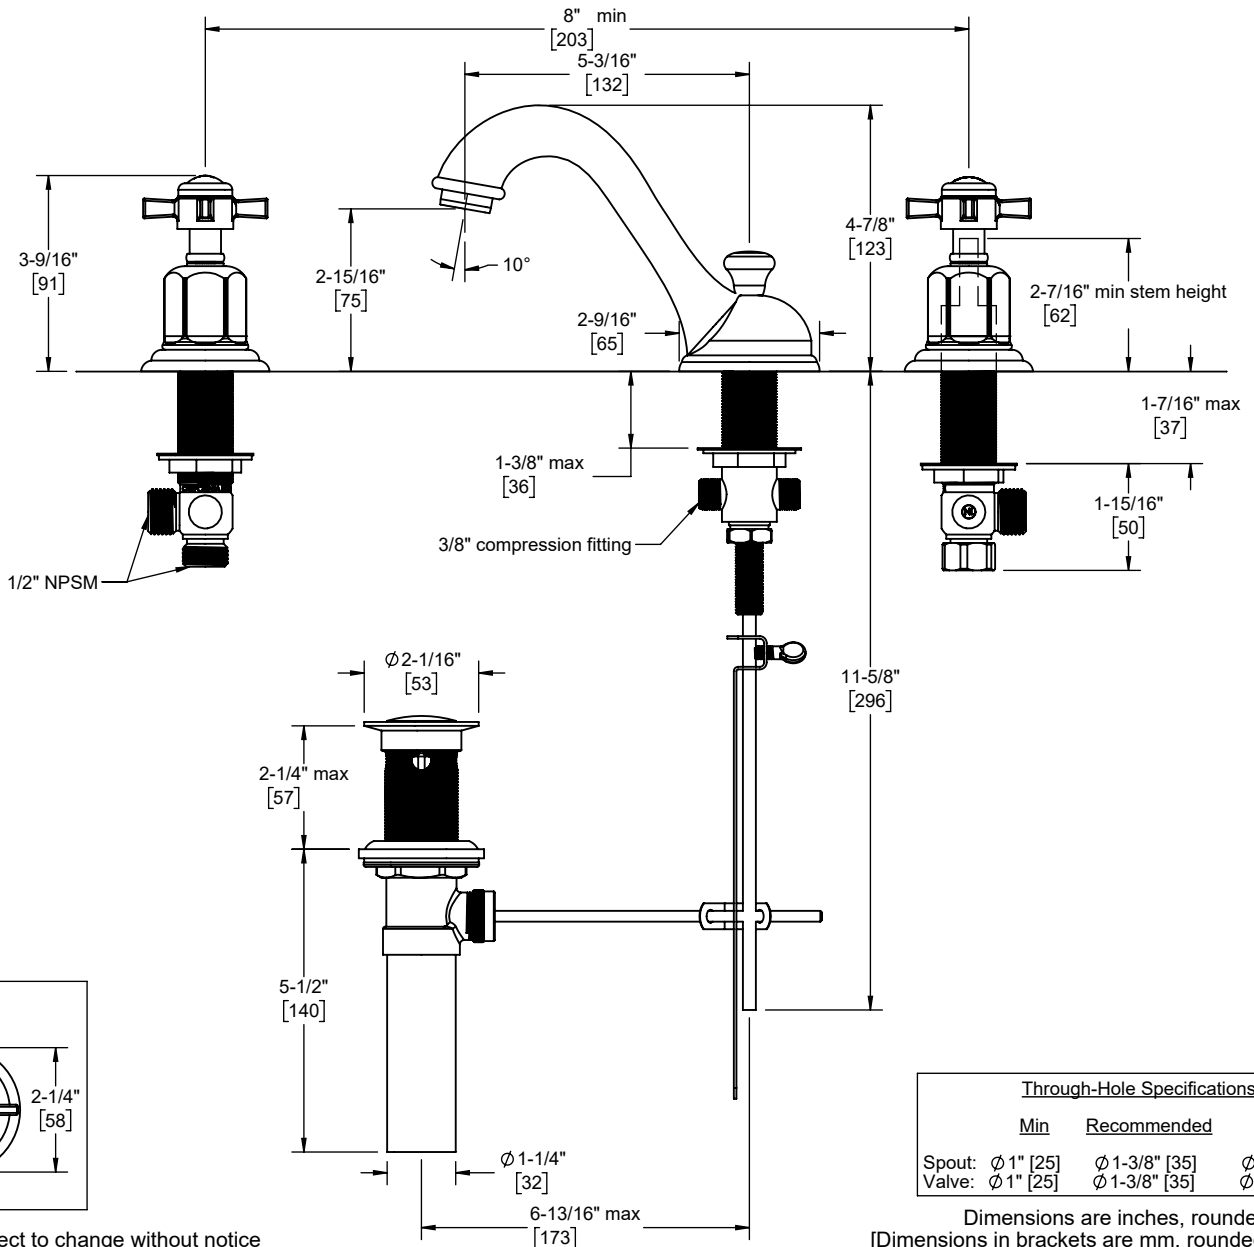

Through-Hole Specifications			
	Min	Recommended	Max
Spout:	ø 1" [25]	ø 1-3/8" [35]	ø 1-5/8" [41]
Valve:	ø 1" [25]	ø 1-3/8" [35]	ø 1-1/2" [38]

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice