




### 9628SS


### Features

- Tank capacity 5/8 gallon (2-1/2 quarts)
- Provides 190°F water instantly
- Heats 60 cups per hour
- Power 1300 watts (uses less energy than a 40W light bulb)
- All stainless steel tubes, heating coil, tank and outer case
- Sensor prevents dry start-up
- On indicator light
- RO filter compatible
- Mounting bracket included

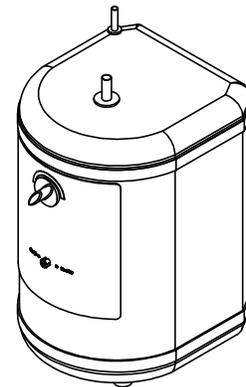

### Codes/Standards Applicable



- Product meets or exceeds the following:
- NSFANSI 372 (UL File: MH61355)

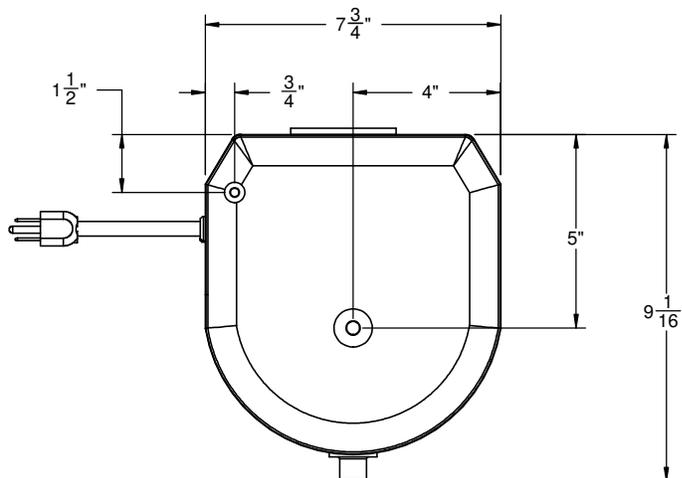

### Electrical Specifications

- 120 VAC, 60 HZ, 1300 Watts
- 10.83 amps- connect to 15 or 20-amp circuit
- Max temp 190°F ± 5°F

**NOTE:** Since tank is an open vent system (continuous opening between tank and spout) to relieve pressure that may occur during heating cycle, water may drip from spout during this cycle. **THIS IS NORMAL**

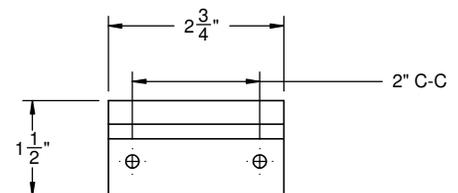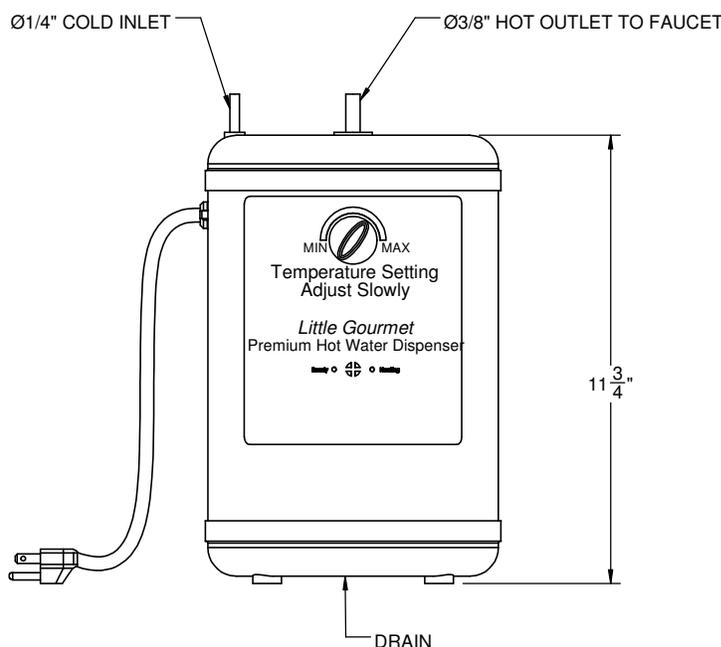

MOUNTING BRACKET