



## INDUSTRIAL HOT ONLY WATER DISPENSER

## **Features**

- Over 28 finishes including 13 PVD finishes
- · All brass construction
- 360° rotating spout
- Insulated body and spout to reduce heat transfer to faucet
- Self-closing handle
- Max flow rate: 1.8 gpm (6.8 L /min); varies with hot water tank
- Faucet is not compatible with RO filter unit
- Requires Hot Water Tank (9628SS) sold separately

## Codes/Standards Applicable

Product meets or exceeds the following:


- ASME A112.18.1/CSA B125.1
- NSF 61 and NSF 372
- CEC / DOE
- · Commonwealth of MA
- ADA Compliant



CF-9625-K30-FL CF-9625-K30-KL CF-9625-K30-SL



XX = DENOTES HANDLE STYLE

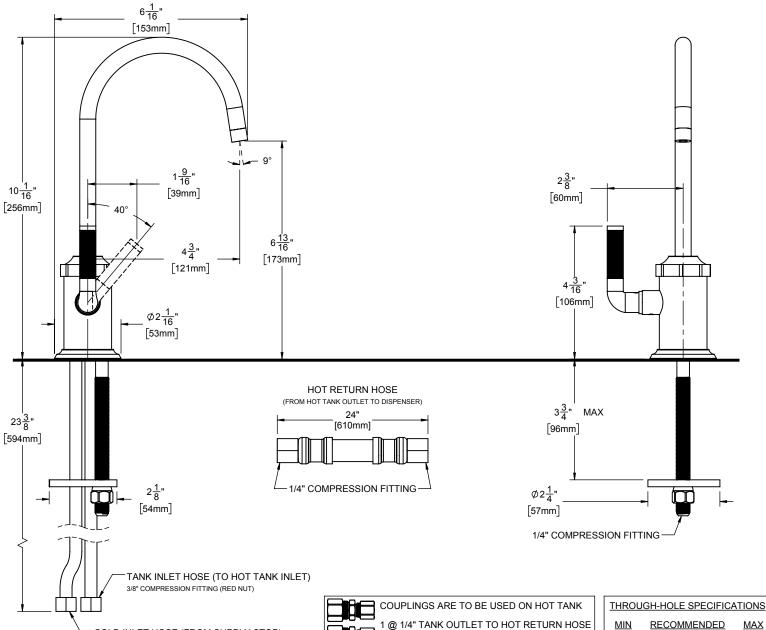

3/8" COMPRESSION FITTING (BLUE NUT)

COLD INLET HOSE (FROM SUPPLY STOP)

Ø 1-1/4"

1 @ 3/8" TANK INLET TO TANK INLET HOSE

Ø1-3/8"

Ø 1-1/2"