



Features

- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- No additional wall or trap stabilizer kit required
- 10 gpm (37 L/min) tub filler max flow rate at 60 psi
- 2.0 gpm (7.6 L/min) or 1.8 gpm (6.8 L/min) handshower max flow rate
- Ceramic mixing cartridge
- Handshower holder may be adjusted forward during installation
- Rough valve (9511) sold separately

7711-XX.20
7711-XX.18



7711-E3.FR shown



XX denotes handle series



Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (1.8 gpm)/ DOE (1.8 & 2.0 gpm)
- Commonwealth of MA
- ADA compliant (lever handles only)
- Local codes may require installation of an upstream tempering valve

Handle Series	A	B
37 37T	2-7/16" [63]	6-7/16" [163]
45	3" [77]	6-1/4" [158]
70	2-3/4" [70]	5-15/16" [151]
77	2-3/4" [70]	5-3/4" [147]
E3	3-5/16" [101]	5-13/16" [148]
E4	2-3/4" [70]	6-5/16" [160]
E5	2-3/4" [70]	6-3/16" [157]

Through-Hole Specifications		
Min	Recommended	Max
Ø 3-11/16" [94]	Ø 3-11/16" [94]	Ø 3-15/16" [100]

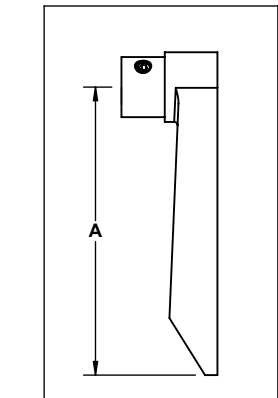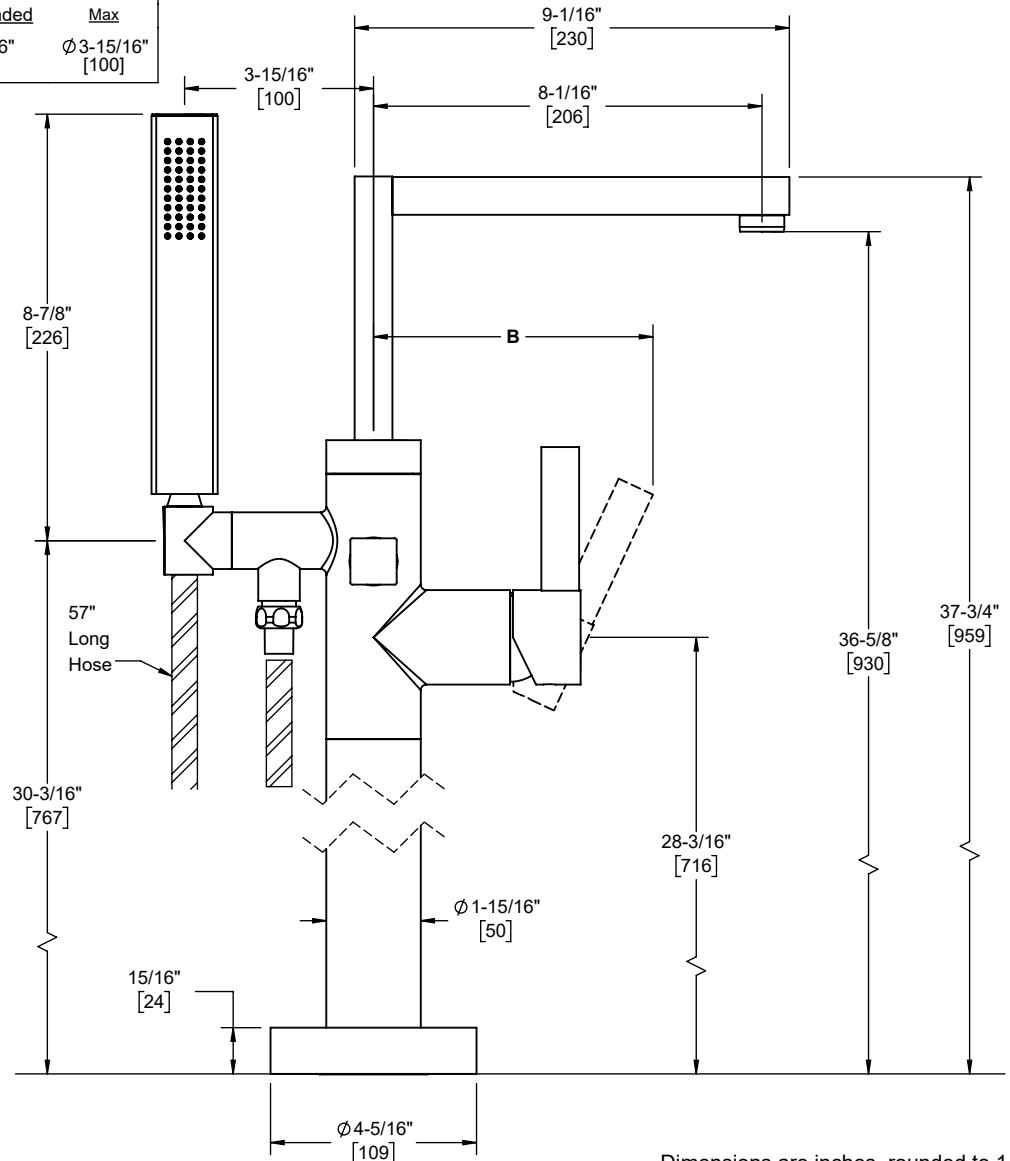

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]