



Features

- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- Insulated to reduce heat to faucet
- Self-Closing for hot water
- Max flow rate: 1.0 gpm (3.8 L/min)
- **Not** compatible with RO filter units
- Requires Hot Water Tank (9628SS) sold separately

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant

9623Q-K50-ST
9623Q-K50-BST
9623Q-K50-RB
9623Q-K50-BRB




9623Q-K50-RB shown

9623Q-K50-ST shown



Handle Style	A	B
ST BST	4-13/16" [122]	1-15/16" [50]
RB BRB	4-13/16" [123]	1-15/16" [50]

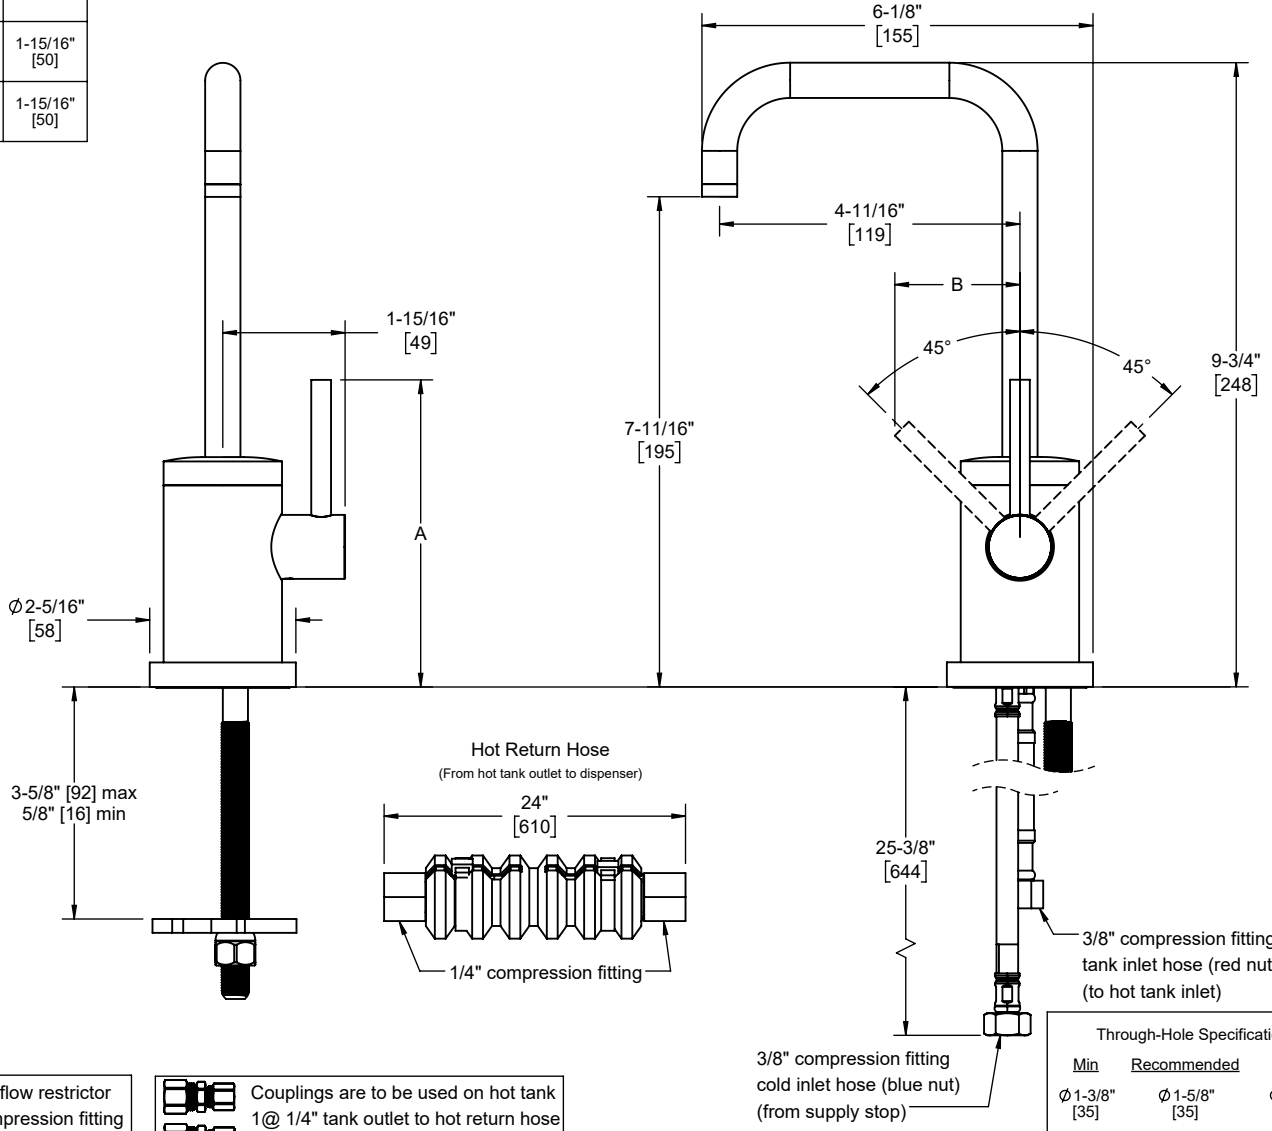

Supply line flow restrictor for 3/8" compression fitting 9/16"-24 male x female

Couplings are to be used on hot tank
1@ 1/4" tank outlet to hot return hose
1@ 3/8" tank inlet to tank inlet hose

Through-Hole Specifications		
Min	Recommended	Max
Ø 1-3/8" [35]	Ø 1-5/8" [35]	Ø 1-5/8" [41]

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]