


QUESTIONS OR CONCERNS CONTACT CANARM AT:

1-800-265-1833 (English)
1-800-567-2513 (French)

Monday through Friday 8:00 AM to 5:00 PM E.S.T.

TOOLS AND MATERIALS REQUIRED:



Pliers



Wire Cutters

Wiring supplies as required by electrical code



Blade Screwdriver




Phillips Screwdriver

SAFETY PRECAUTIONS:


- 1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE. DO NOT REMOVE INSULATION FROM FIXTURE.**
- 2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**
- 3. CONNECT THE GROUND WIRE (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX.**

INSTALLATION:

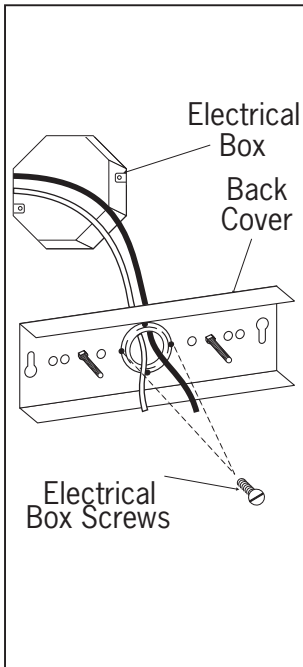


1. Feed power cords from the outlet box through the centre hole of the back cover. Align holes of back cover over outlet box and secure with outlet box screws.

NOTE: Make sure the back cover is level before tightening the screws.

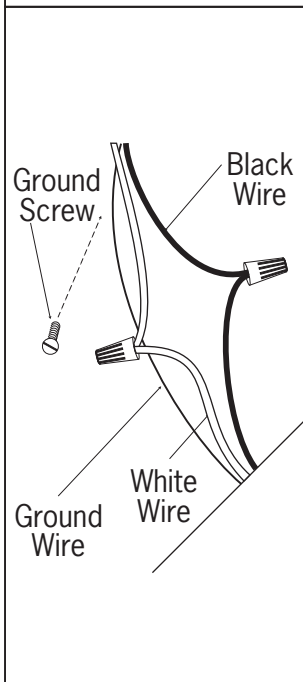

2. Start green ground screw into threaded hole marked "GND". Connect ground wire from fixture to ground screw. Connect white power lead(s) from light fixture to white wire in outlet box. Connect black wire(s) from light fixture to black wire in outlet box.


NOTE: Do not disconnect any pre-wired connections.

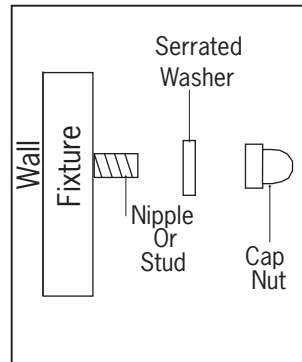

3. NOTE: Refer to the style of assembly that matches the style of your fixture.

Tuck electrical wires into outlet box, position fixture over nipple or studs, securing in place with serrated washer(s) and cap nut(s).


STYLE #1



4. Mounting Glass To Fixture (The glass may or may not be included). **NOTE:** Refer to the style of assembly that matches the style of your fixture.


STYLE #1 - Using thumb screws provided, attach the glass to the fixture head. Place the glass into the fixture head and tighten screws into the groove in the glass.

STYLE #2



STYLE #2 - Squeeze the two clips together around the socket. Slide the glass over the clips, then push the glass up snug to the fixture head.

STYLE #3



STYLE #3 - Remove spinner nut from socket. Position glass on the fixture and secure with spinner nut.

Note: Glass may face up or down.