

# FH-CeilingMountTrack - Single

**CS TrackSystems** are an innovative range of track systems designed for a multitude of sliding doorway applications.


**CS FH-CeilingMount Track** is supplied with full-length fins that enable the ceiling lining to be fixed flush with the underside of the track.

Unlike other tracks, the base of the track is flat, ensuring a continuation of the ceiling-line through where the door slides. The track can also be painted on site to match the ceiling color.

FH-CeilingMountTrack is available as standard in a single, double and triple track configuration.



*Single FH-CeilingMountTrack in a corner meeting pocket door setup.*

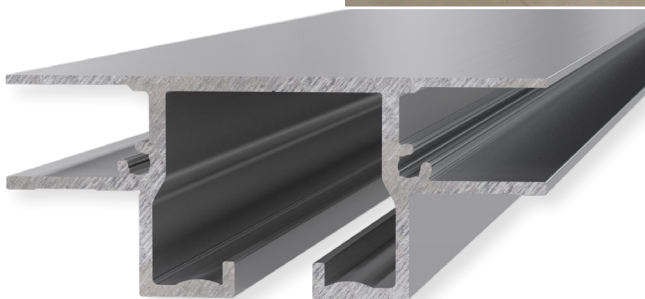

*Single FH-CeilingMountTrack*


# FH-CeilingMountTrack - Single

## Design Features & Options

- 1 Suitable for large room dividers or surface sliding applications.\*
- 2 Available in 6', 8', 12' and 24' pre-cut lengths. Custom lengths can be cut to order.
- 3 Track can be configured to suit Bi-Parting door set-ups, including CornerMeeting detail.
- 4 Track may be painted on site to match ceiling color. (See data sheet available for download from our website).

\*Not suitable for use in a pre-fabricated pocket frame. You will need to build a wall either side of the track when using in a pocket application.

## Technical Information

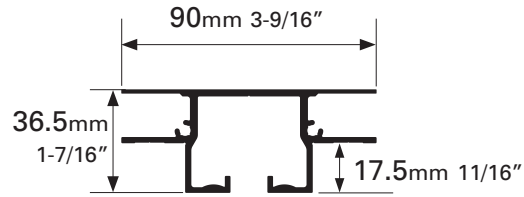

|                             |                |
|-----------------------------|----------------|
| <b>Finish:</b>              | Mill-finish    |
| <b>Max Door Thickness:</b>  | No limit       |
| <b>Max Weight per door:</b> | 240kg (500lb ) |
| <b>Carriage Pack:</b>       | M6 or M8       |


## Standard CS Track Features

Our engineers focus on constantly developing new products and refining existing ones. That's why our products come with a number of unique features:

- 1 Heavy duty one-piece extruded aluminum track.
- 2 Pre-machined mounting holes.
- 3 Minimal clearance means carriages/wheels cannot jump off track or jam.
- 4 Large diameter wheels with precision ground bearings make for smooth running.
- 5 Radiused track reduces friction and allows dust to be pushed into the gutters so the door always slides smoothly.
- 6 M8 body made from cast stainless steel for strength and reliability. 4-wheel carriages are standard on all doors over 200lb.
- 7 **CarriSnap™** quick release system allows the door to be removed easily from track; no need to unscrew anything and lose door height adjustment.




**FH-Ceiling Mount Track with M6 carriage**



**M8 carriage & mounting plate with stop**

## Suggested Fixing Detail

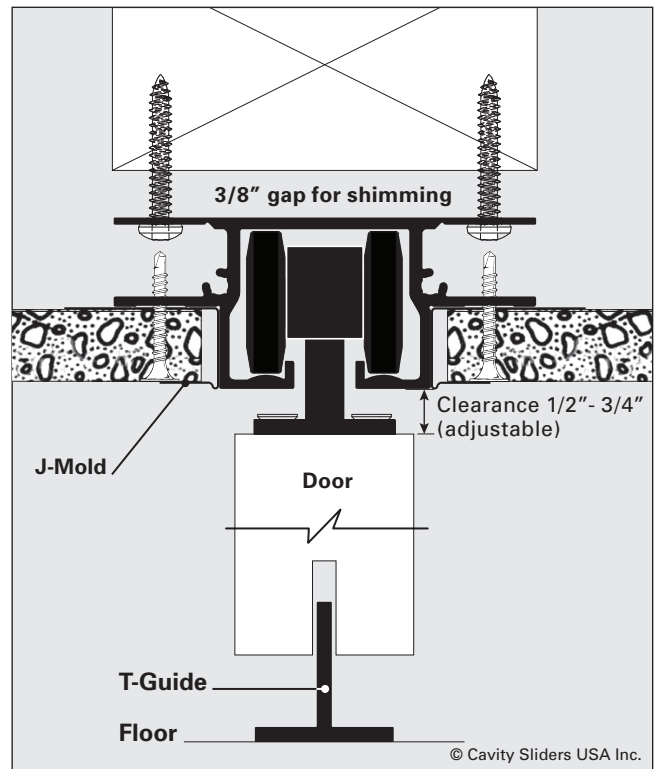

## How to Order

1. **Specify track length**  
Available in 6, 8, 12 and 24' pre-cut lengths or can be cut down to specific lengths on request.
2. **Choose a carriage pack** (one per door) - refer to **Carriage Packs page**  
**M6** (200lb) or **M8** (500lb)  
(includes carriages, mounting plates, T-Guide, fixing screws, adjusting wrench and installation instructions)

© All copyright and other property in this document is reserved by Cavity Sliders USA Inc. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. CS FH-CeilingMountTrack™ (O.D. 2008). Patent pending. 60883/A - 01.2017

[www.cavitysliders.com](http://www.cavitysliders.com)

High quality products designed in New Zealand



T (888) 466 0030  
F (310) 769 5824  
E [info@cavitysliders.com](mailto:info@cavitysliders.com)

**Cavity Sliders USA Inc.**

548 Finney Ct  
Gardena  
CA 90248



Quality products from:

**CavitySliders**  
Quality Sliding Door Hardware