

## Model# 0640

### Pre-Rinse Assembly

#### FEATURES & SPECIFICATIONS


- 24" Quick Install Riser With Spring Guide
- 44" Flexible Stainless Steel Hose
- Back Flow Preventers
- Quick Install Adapters to retrofit on T&S, Chicago Faucets and Fisher 1.1 GPM Flow Rate, 6.5 ozf Spray Force Spray Valve
- 1.1 GPM Flow Rate, 6.5 ozf Spray Force Spray Valve
- Pipe Strap and Hook Assembly

#### FINISHES

- PC Polished Chrome

#### STANDARDS

- ASME A112.18.1
- ANSI / NSF 61, SECTION 9
- CUPC / IAPMO LISTED
- CONTAINS NO MORE THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT



#### FLOW

- 1.1 GPM Flow Rate, 6.5 ozf Spray Force Spray Valve

#### WARRANTY

- Lifetime Limited Warranty
- Lifetime Residential Warranty
- 5 Year Commercial Warranty


Job Name \_\_\_\_\_ Date \_\_\_\_\_  
Model Specified \_\_\_\_\_ QTY \_\_\_\_\_  
Customer/Wholesaler \_\_\_\_\_  
Contractor \_\_\_\_\_  
Architect/Engineer \_\_\_\_\_  
Submitted as Shown \_\_\_\_\_  
Submitted w/ Variations \_\_\_\_\_

0640/REV. 11 2016

Product Specifications subject to change without notice

## Model# 0640

### Pre-Rinse Assembly

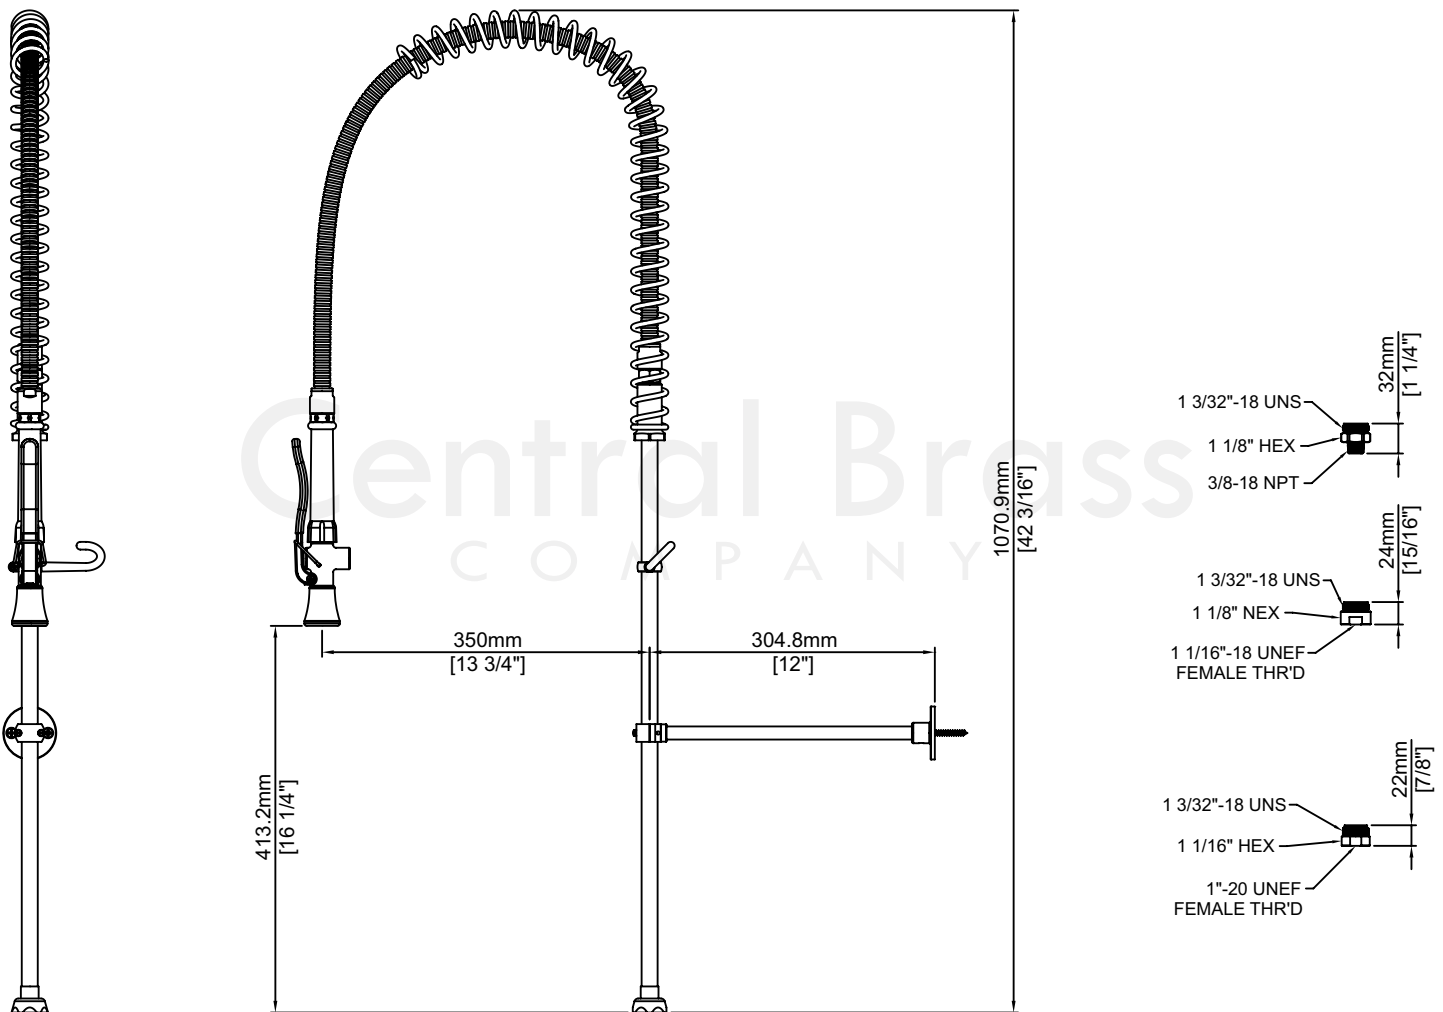

0640/REV. 11 2016

Product Specifications subject to change without notice