

Energy Recovery Ventilator

VE30160

CLEAN COMFORT™
INDOOR AIR ESSENTIALS

Features

- Three operating modes (Intermittent, Continuous and High)
- 100% variable speed
- ISF™ (Insert, Slide and Fix) 6" (153 mm) oval collar system
- Advanced proportional supply fan shut-down defrost sequence
- Single-person mounting system via wall bracket
- Dual permanently lubricated PSC motors
- Integrated auxiliary furnace interlock relay
- Ventilator can be balanced by adjusting each motor independently; no balancing dampers required
- Connection terminals for optional wall controls
- Wall-mount bracket included
- Quiet operation

Energy Recovery Core

- Transfers both sensible and latent heat
- Effective in warm and cold climates
- Water washable

Optional Accessories

- Matrix 2-in-1 high-performance concentric ventilation hood

Warranty


- 10-year limited warranty* on motors
- 5-year limited warranty* on parts
- 5-year limited warranty* on Energy Recovery Core

Certifications and Standards

- HVI Certified
- CSA C439 Standard (Packaged Heat/ Energy Recovery Ventilators (HRV/ERV))
- CSA Standard CSA 22.2 NO.113-10 (Fans and ventilators)
- UL Standard 1812 2nd Ed. Ducted Heat/Energy Recovery Ventilators (HRV/ERV)



Airflow (Front View)

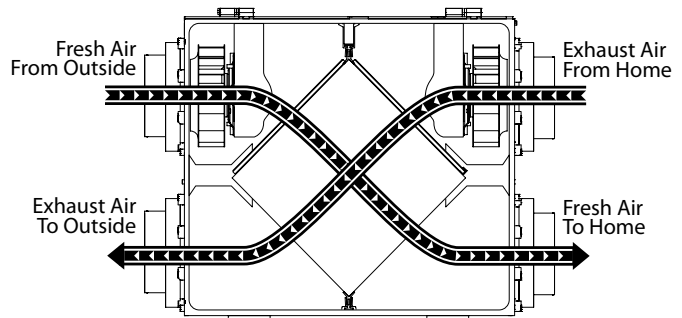

Proprietary Notice

This document and the information disclosed herein are proprietary data of Daikin North America LLC. Neither this document nor the information contained herein shall be reproduced, used, or disclosed to others without the written authorization of Daikin North America LLC except to the extent required for installation or maintenance of recipient's equipment.

Liability Notice

Daikin North America LLC does not accept any liability for installations of ventilation equipment installed by unqualified personnel or the use of parts/components/equipment that are not authorized or approved by Daikin.

Copyright Notice

Copyright 2014, Daikin North America LLC All rights reserved.



* Complete warranty details
available from your local dealer
or at www.cleancomfort.com.

TECHNICAL SUPPORT • 1-888-724-5211 • www.cleancomfort.com



Specifications VE30160

Cabinet

Dimensions 29½" x 22½" x 11⅝"
(749.3 mm x 571.5 mm x 289 mm)

Construction 20-gauge galvanized pre-painted steel corrosion-resistant liner: molded expanded Polystyrene (EPS) Rated UL94 HF-1

Duct Connections Four, 6" (152.5 mm) dia. ISF double collar system

Airflow Rates 30 CFM (14 L/s) to 160 CFM (76 L/s)

Motors Two PSC variable-speed backward curved
Maximum RPM 2695; 3/32 HP, Class F, thermally protected

Voltage 120 VAC @ 60 Hz / 1 Phase

Amperage 1.5 A / 142 W

Electronic Components Circuit output voltage: 5VDC nominal
RoHS compliant

Heat Exchanger dp point cross-flow (Enthalpic Polymer Membrane)
Exchange surface 85 ft² (7.9 m²)
Dimensions 12"L x 12"W x 10"D (304.8 mm x 304.8 mm x 254 mm)
Construction Corrugated aluminum layers with advanced polymer membrane, Recognized UL94 HB

Defrost type Evacuation; activated automatically at 23°F (-5°C)

Filters Two Fiberbond washable

Drain Connection ½" (12.7 mm)

Actual Weight 42 lbs (19 Kg)

Shipping Weight 47½ lbs (21.5 Kg)


Optional Wall Controls

Mechanical VHP-RD1, VHP-RD3P


Timers VHP-T3 (20, 40, 60 minutes)

Wall Control Dimensions

VHP-RD1 or VHP-RD3P

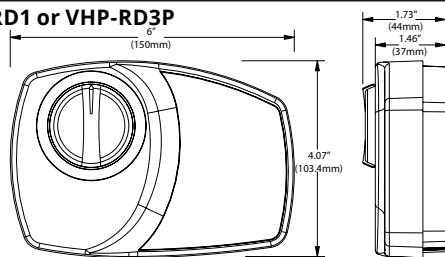


VHP-T3 Timer




Dimensional Data

Front View

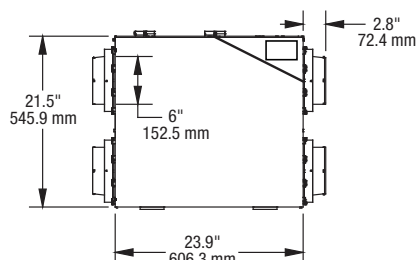


Top View

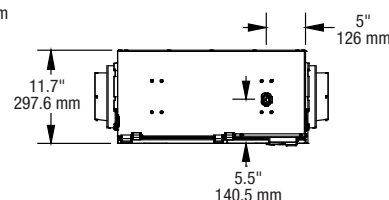


Minimum Clearance Data

Front View

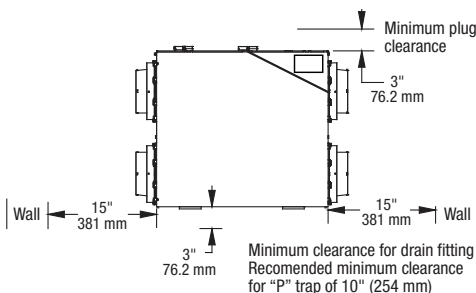


Top View



Ventilation Performance

External Static Pressure	Net Supply Airflow		Gross Airflow Supply		Gross Airflow Exhaust	
	Pa	in. wg	L/s	CFM	L/s	CFM
25	0.1	97	207	99	210	99
50	0.2	89	189	91	193	91
75	0.3	88	187	84	179	84
100	0.4	75	159	76	162	76
125	0.5	70	148	71	150	69
150	0.6	62	131	63	133	62
175	0.7	55	116	55	118	55



Energy Performance

Supply Temperature		Net Airflow		Power Consumed (Watts)	Sensible Recovery Efficiency	Apparent Sensible Effectiveness	Latent Recovery Moisture Transfer
°C	°F	L/s	CFM				
Heating	0	32	24	51	58	65	0.32
	0	32	38	80	76	65	0.29
	0	32	56	118	96	62	0.26
	-15	5	26	55	59	52	0.26
Total Recovery Efficiency							
Cooling	35	95	30	64	66	—	34

Our continuing commitment to quality products may mean a change in specifications without notice.

© 2014 **DAIKIN NORTH AMERICA LLC** • Houston, Texas • Printed in the USA.