

# Codelocks CL200 Range

This premium range of light duty locks offers 5 functions in 2 PVD finishes, all of which are available with key override as an option. Multiple locks can be supplied keyed alike.

Codelock CL200 is suitable for a wide range of light duty entry control applications, in offices, warehouses, laboratories and around the home.

All products feature a bevelled hexagonal handle, tumbler alignment for easy code changing, and durable PVD (Physical Vapour Deposition) finishes. As with all Codelocks, installation and code changing are simple, thanks to the easy to follow, clear instructions supplied.

- PVD weather resistant, low maintenance finish
- Available in 5 functions
- Easy to fit
- Hexagonal bevelled handle and lock case
- Tumbler alignment for easy code change
- Key bypass option may be specified on any function
- Dual backplate allows option of hold open or non hold open function (CL255)
- For internal and external use

### CL200

Front plate is common to all functions



Key Override option is available on all functions  
Stainless Steel finish only



CL200 Surface Deadbolt



CL210 Mortice Deadbolt



CL255 Mortice Latch  
With Dual backplate



CL290 Back to back  
Stainless Steel finish only  
Note – optional key, one side only

Technical information on page 44

**CODELOCK**  
**200**  
**MECHANICAL**



# Codelocks CL200 Range

## Technical Specifications

**Door thickness** 35mm - 65mm (1<sup>3</sup>/<sub>8</sub>" - 2<sup>1</sup>/<sub>2</sub>" )

**Spindle type** Flat spring loaded spindle

**Body material** Zinc alloy

**Non handed** Lock will fit doors hung on the left or right

### Latch

Light duty with stainless steel latchbolt head, with "anti-shim" plunger, 60mm (2<sup>3</sup>/<sub>8</sub>" ) backset requires 25mm (1" ) hole, 82mm (3<sup>1</sup>/<sub>4</sub>" ) deep.

Also available to order:

- 50mm (2" ) backset latch requiring 25 x 72mm (1" x 2<sup>7</sup>/<sub>8</sub>" ) hole or
- 70mm (2<sup>3</sup>/<sub>4</sub>" ) backset latch requiring 25 x 92mm (1" x 3<sup>5</sup>/<sub>16</sub>" ) hole.

### Codes

8,191 non sequential codes available

### Code storage

Single code

### Code change method


Requires removal of lock from door

**Neoprene seals are included on both sides to provide friction against the face of the door and to avoid damage from overtightening of the fixing bolts.**

**For internal and external use.**

### Finishes available


PVD (Physical Vapour Deposition) hard wearing low maintenance finishes SS (stainless steel) and PB (polished brass).

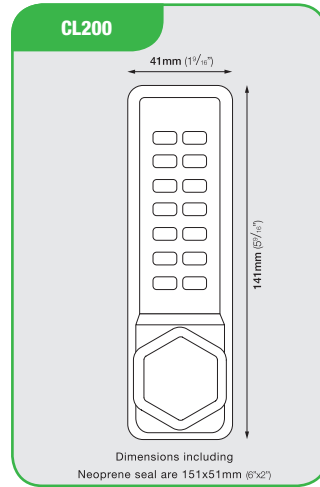

### Code front common to all models


### CL210 Mortice Deadbolt NOT ILLUSTRATED

Sizes as CL255. Bolt extends 25mm (1" ) beyond door edge when locked.




### CL200 Surface Deadbolt

Bolt slides on inside surface of door to lock or unlock. Bolt is moved manually by means of the outside knob after code input and freely by the inside knob at all times. A surface mounted keep is provided. Stainless Steel finish only.



### CL255 Mortice latch

As standard supplied with 'Hold open' function allowing free entry when required without operating the code. Function can be disabled on installation requiring code to be entered every time to open door.



### CL290 Back to Back

The CL290 BB mortice latch is supplied with two code plates to provide coded access in both directions.



### Key Override

Any of the CL200 functions may be ordered with key override. Locks may be keyed alike if required. Stainless Steel finish only.

**Cylinders may be ordered keyed alike on request.**

