


## Sectional - 2 Piece Residential Handleset Specifications



		<b>CZ</b>	<b>HZ</b>	<b>FZ</b>
<b>A</b>	<b>Cross Bores on Center</b>	5-1/2"	5-1/2"	5-1/2"
<b>B</b>	<b>Plain Latch to Thru-bolt (on Center)</b>	8-7/16"	8-7/16"	8-7/16"
<b>C</b>	<b>Deadbolt Rose Height</b>	3-3/8"	3-1/2"	3-1/2"
	"    " <b>Width</b>	2-5/8"	2-3/8"	2-5/8"
<b>D</b>	<b>Main Escutcheon Height</b>	4-1/8"	4-3/8"	4-1/2"
	"    " <b>Width</b>	3"	2-3/4"	2-5/8"
<b>E</b>	<b>Overall Gripset Height</b>	12"	12"	13-1/4"
<b>F</b>	<b>Lower Escutcheon Height</b>	2-7/16"	2-9/16"	3.0"
	"    " <b>Width</b>	1-7/8"	1-5/8"	1-1/2"

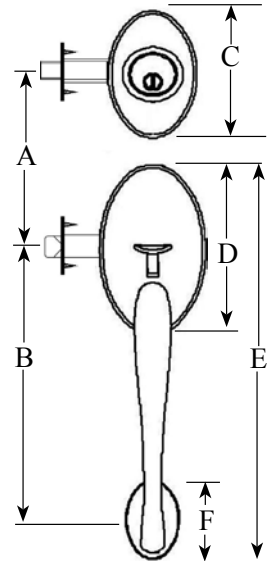

Handleset Specifications & Options	
Construction	Solid Cast Zinc Handleset & Rosette.
Cylinder	Brass 5 pin KW1 std., 5 pin "C" optional.
Keying	As specified: Available Master keyed, Builder keyed, KD, KA
Latch	Adjustable backset, 1" round corner narrow faceplate std. Square corner or drive-in adjustable optional.
Strike	Plain latch: Full lip round corner. Deadbolt: 2-1/4"x 1" round corner. Others available.
Door Prep	Edge bores 1", latch mortises 1"x 2-1/4", cross bores 2-1/8", backsets standard 2-3/8", optional 2-3/4". Hole spacing 5-1/2" for thumb latch and deadbolt latch..
Door Thickness	Min 1-3/8", Max 1-3/4". Thick door kits for 2-1/4" doors available.
Handing	Non-handed.
UL Labeled	Available 20-minute UL Labeled.
Warranty	Lifetime mechanical, 5 year finish.

Available Finishes								Case Qty
SKU #	SS	TB	AB	AN	BC	PB	PS	Units
<b>Colonial</b>	x	x	x	x	x	x	x	6
<b>Heritage</b>	x	x		x	x	x		6

Function	Operation
2610 Active	Deadbolt thrown by rotating interior turn-piece or exterior key. Plain-latch retracted by interior knob/lever or exterior thumb piece.
2620 Double Cylinder	Deadbolt thrown by rotating interior or exterior key. Plain-latch retracted by interior knob/lever or exterior thumb piece.
2690 Dummy	Non-active function. Exterior gripset and interior knob/lever act as pull only.