



# Copper Creek Hardware M-Series ANSI/BHMA Grade-3 Standard Duty Residential Lever Specifications



*AL1200 Series  
Avery Style*



*DL1200 Series  
Daley Style*



*EL1200 Series  
Erin Style*




Meets ADA  
Regulations



Available  
UL LISTED

	A	B	C	D
<b>Avery</b>	4-1/8"	1-3/4"	2-9/16"	1/2"
<b>Daley</b>	4-1/8"	2"	2-9/16"	n/a
<b>Erin</b>	4-3/4"	2-1/4"	2-9/16"	1/2"

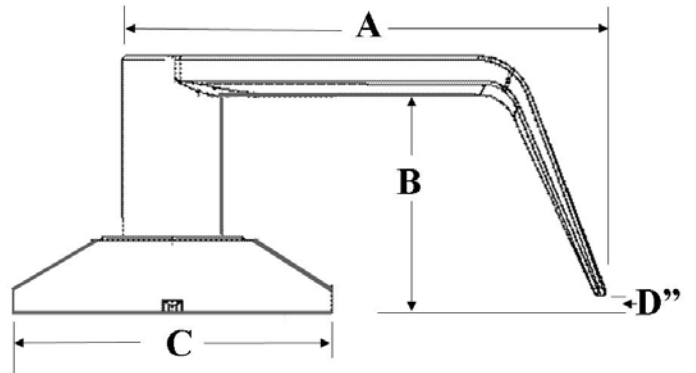

Std. Finish	Special Order Finishes					Case Qty	Case Size
	TB	AB	AN	PB	PS		
SS						Units	LxWxH
x	x	x	x	x	x	18	18x14x10

Lever Specifications & Options	
ANSI / BHMA	ANSI 156.2 Grade-3.
Rose Diameter	2-9/16".
Cylinder	5 pin KW1 std.
Keying	As specified: Available Master keyed, Builder keyed, KD, KA.
Latch	2-3/8" backset, 1" round corner narrow faceplate std. 2-3/4" or drive-in optional.
Strike	PT-LS16: 2-3/4" Round corner strike std.
Door Prep	1" edge bore, 1"x 2-1/4" latch mortise, 2-1/8" cross bore, 2-3/8" backset standard, 2-3/4" optional.
Door Thickness	Min 1-3/8", Max 1-3/4".
Handing	All 1200 levers are non-handed.
U.L. Labeled	1220-20 minute, 1231 & 1241 90-minute.
Warranty	25 year mechanical, 5 year finish.

Function	Operation
1220 Passage	Both levers always free turning. No locking operation.
1220 U.L. Passage	Both levers always free turning. No locking operation.
1230 Privacy	Inside turn-button locks and unlocks both levers. Lever can be unlocked by rotating the outside privacy mechanism.
1231 U.L. Restroom	Inside push-button locks both levers. Rotating inside lever or turning outside privacy mechanism unlocks both levers. (Emergency egress & kick off equipped).
1240 Entry	Outside key or inside turn-button locks both levers.
1241 U.L. Entry	Key or inside push button locks both levers. Turning inside lever or key unlocks both levers.
1290 Dummy	1/2 Dummy - Used as pull or decorative trim only.