



Decorative Rosette Residential Lever ANSI/BHMA Grade-3 Specifications




Available UL LISTED



Meets ADA Regulations

	A	B	C	D
Waverlie	4-5/8"	1-1/2"	2-5/8"	1-3/8"
Zane	4-3/4"	1-1/4"	2-5/8"	1-1/4"
Kash	4-5/8"	1-7/8"	2-5/8"	1-3/4"

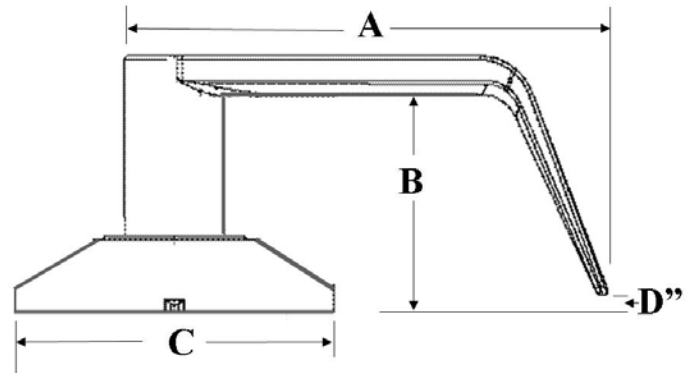

LEVER SPECIFICATIONS & OPTIONS		IN STOCK FINISH							CASE QTY	
ANSI / BHMA	ANSI 156.2 Grade-3, 200,000 cycles.	STYLE	SS	TB	AB	AN	BC	PB	PS	Units
Cylinder	Solid Brass KW1 5-pin std. "C" optional .	Waverlie	x	x		x	x	x	x	18
Keying	As specified: Available Master keyed, Builder keyed, KD, KA.	Zane	x	x			x		x	18
Latch	Adjustable backset, 1" round corner narrow faceplate std. Square corner or drive-in adjustable latch optional.	Kash	x	x			x		x	18
Strike	PT-LS06: 2-3/4" full lip round corner strike std.	FUNCTION OPERATION								
Door Prep	Edge bore 1", latch mortise 1"x 2-1/4", cross bore 2-1/8", backset standard 2-3/8", optional 2-3/4".	2220 Passage	Both levers always free turning. No locking operation.							
Door Thickness	Min 1-3/8", Max 1-3/4"	2230 Privacy	Inside turn-button locks and unlocks both levers. Lever can be unlocked by rotating the outside privacy mechanism.							
Handing	All are non-handed except Waverlie & Kash 1/2 dummy is handed.	2231 Restroom	Inside push button locks both levers. Rotating inside lever will unlock both levers.							
UL Labeled	Available 20-minute UL Labeled.	2240 Entry	Outside key or inside turn-button locks both levers.							
Warranty	Lifetime mechanical, 5 year finish.	2290 Dummy	1/2 Dummy - Used as pull or decorative trim only.							