




Copper Creek Hardware P-Series: Solid Forged Brass Handleset Specifications



	<i>Dimensions (in Inches)</i>	AT	LN	MG	CD
A	Cross Bores on Center	5-1/2	5-1/2	5-1/2	5-1/2
B	Plain Latch to Thru- bolt on Center	9-1/16	9-1/16	9-1/16	9-1/16
C	Deadbolt Rose Ht	4-1/8	n/a	n/a	n/a
	“ “ Wth	2-9/16	n/a	n/a	n/a
D	Main Escutcheon Ht	5-1/2	11	10-5/8	19
	“ “ Wth	3-1/8	3-1/8	3	3
E	Overall Handleset Ht	18	18	17-5/8	19
F	Lower Rose Ht	2-3/8	2-1/2	2	n/a
	“ “ Wth	1-7/8	1-9/16	2	n/a

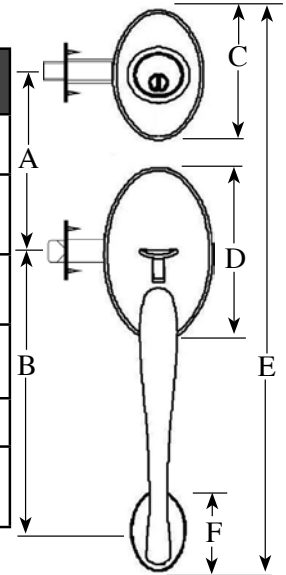

Handleset Specifications & Options	
Construction	Solid Forged Brass Handleset & Rosette.
Cylinder	Brass 5 pin “KW1” std., 5 pin “C” optional.
Keying	As specified: Available Master keyed, Builder keyed, KD, KA.
Latch	Adjustable backset, 1” round corner narrow faceplate std. Square corner or drive-in adjustable optional.
Strike	Plain latch: Full lip round corner. Deadbolt: 2-1/4” x 1” round corner. Others available.
Door Prep	1” edge bore, 1”x 2-1/4” latch mortise, 2-1/8” cross bore, 2-3/8” or 2-3/4”backset. Deadbolt & plain latches on 5-1/2” spacing.
Door Thickness	Min 1-3/8”, Max 1-3/4”. Thick door kit available for 2-1/4” thick doors.
Handing	All P-Series Handlesets are non-handed.
U.L. Labeled	Available 20-minute UL Labeled.
Warranty	Lifetime mechanical, 10 year finish.

Available Finishes									Case Qty
SKU #	SS	TB	AB	AN	BC	PB	PS	PW	Units
Ashton	x	x		x	x	x		x	6
Chandler	x	x		x	x			x	6
Lauren	x	x		x	x	x		x	6
Morgan	x	x		x	x		x	x	6
Function		Operation							
4610 Active		Deadbolt thrown by rotating interior turn-piece or exterior key. Plain-latch retracted by interior knob/lever or exterior thumb piece.							
4620 Double Cylinder		Deadbolt thrown by rotating interior or exterior key. Plain-latch retracted by interior knob/lever or exterior thumb piece.							
4690 Dummy		Non-active function. Exterior gripset and interior knob/lever act as pull only.							