

Product Specifications

Style Number	VV489	
Construction	Solid Polymer Core	
Edge Profile	Accent Bevel	
Nominal Dimensions	7" wide, 48" long	
	US Units	Metric Units

Actual Product Width	7.2"	18.28 cm
Actual Product Length	48.03"	121.99 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.196"	5 mm
Core Thickness	0.197"	5 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.039"	1 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	


Packaging

Area per Box	28.84 sq ft	2.679 sq m
Pieces per Box	12 pcs	
Weight per Box	48.5 lbs	21.99 kg
Boxes per Pallet	50 boxes	



2750 Paladin Oak

Colors

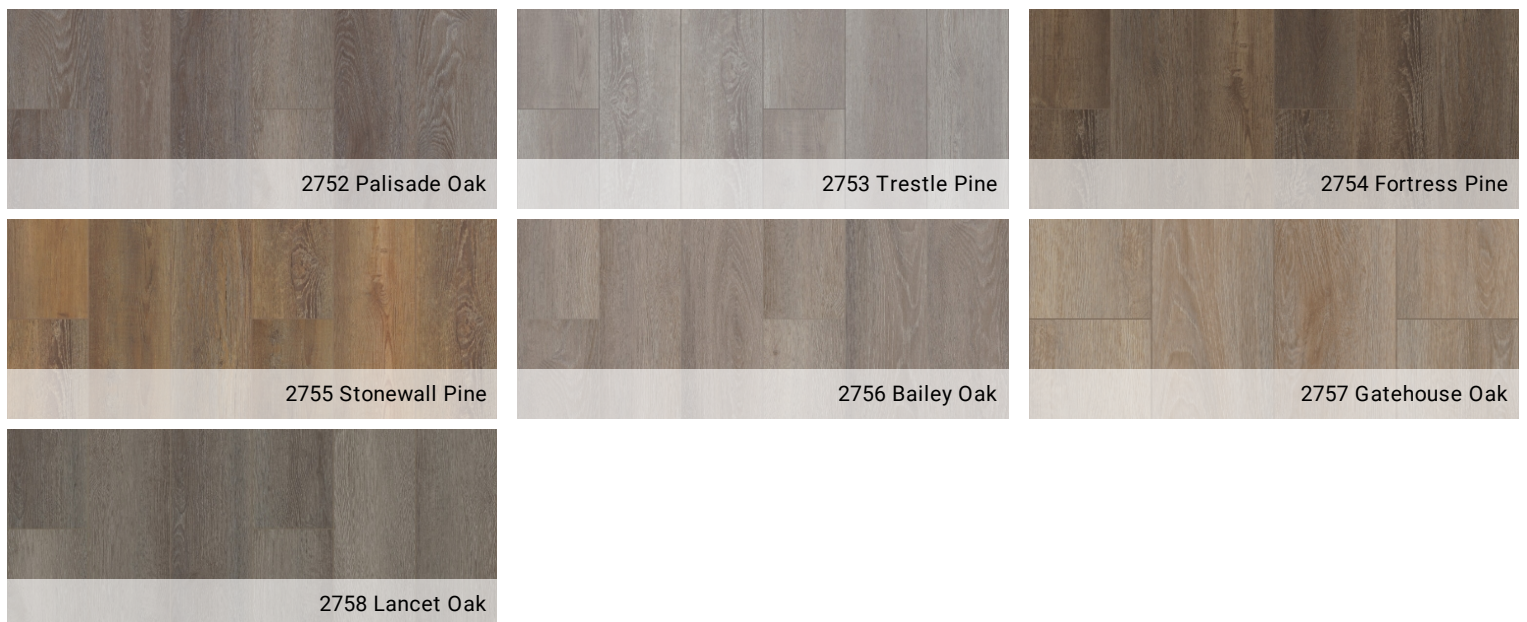

2752 Palisade Oak

2753 Trestle Pine

2754 Fortress Pine

2755 Stonewall Pine

2756 Bailey Oak

2757 Gatehouse Oak

2758 Lancet Oak



COREtec Pro Plus HD 7"

Performance

Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Smoke Density (ASTM E662)	Passes
Radiant Panel (ASTM E648)	Passes, Class I

Warranties

USF Lifetime

USF 15 Year Heavy Commercial