COREtec®
the Original

Product Specifications

Style Number	VV023
Construction	Waterproof Foamed Core
Edge Profile	Micro Bevel
Nominal Dimensions	5" wide, 48" long

	US Units	Metric Units
Actual Product Width	4.96"	12.6 cm
Actual Product Length	48.03"	122 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.314"	8 mm
Core Thickness	0.256"	6.5 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.059"	1.5 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	

Packaging

Area per Box	26.68 sq ft	2.48 sq m
Pieces per Box	16 pcs	
Weight per Box	44.09 lbs	19.99 kg
Boxes per Pallet	42 boxes	

201 Gold Coast Acacia

Colors

201 Gold Coast Acacia	202 Deep Smoked Oak	205 Northwoods Oak	207 Rocky Mountain Oak	501 Carolina Pine	504 Clear Lake Oak
505 Norwegian Maple	507 Dakota Walnut	508 Red River Hickory	509 Wheldon Oak	510 Pinyin Bamboo	511 Durban Pear
512 Rustenburg Oak	513 Brockport Oak	570 Ashton Woods Oak	571 Baywood Oak	573 Dodwell Oak	
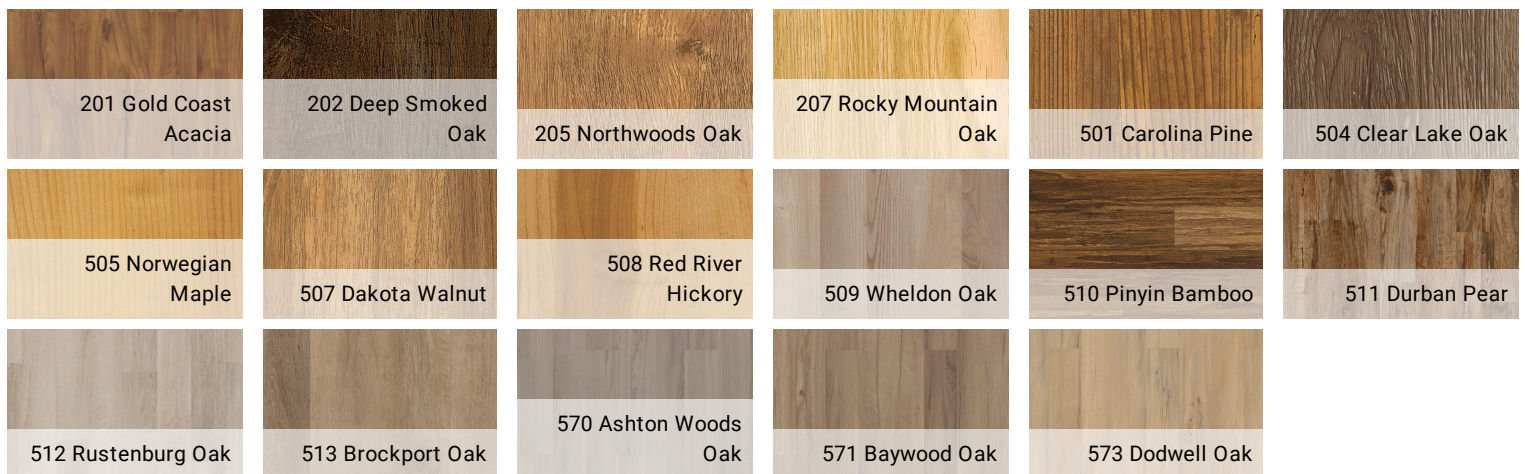
COREtec Plus Plank 5"

Performance

Static Load (ASTM F970)	Passes
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Smoke Density (ASTM E662)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Warranties

USF Lifetime Limited

Wpc 15 Yr Com Ltd

Com Ub Bond 4100/4151

Certifications

FloorScore Certified

GreenGuard (Certification, Gold, Private Label) Certified