

Product Specifications

Style Number	VV022	
Construction	Waterproof Foamed Core	
Edge Profile	Micro Bevel	
Nominal Dimensions	6" wide, 48" long	
	US Units	Metric Units
Actual Product Width	5.91"	15.01 cm
Actual Product Length	48.03"	122 cm
Wear Layer Thickness	12 mil (0.012")	0.3 mm
Overall Product Thickness	0.248"	6.3 mm
Core Thickness	0.248"	6.3 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	


Packaging

Area per Box	31.73 sq ft	2.95 sq m
Pieces per Box	16 pcs	
Weight per Box	48.06 lbs	21.79 kg
Boxes per Pallet	42 boxes	




801 Alice Springs Acacia


Colors

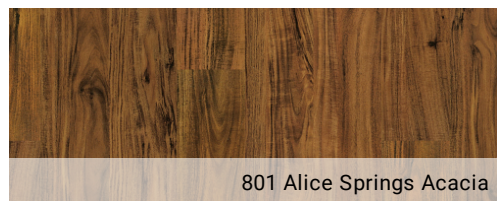


801 Alice Springs Acacia

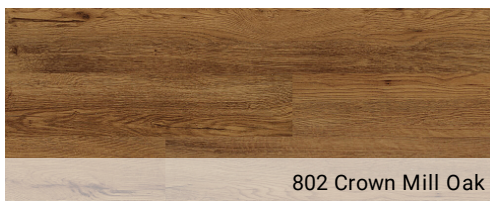

802 Crown Mill Oak

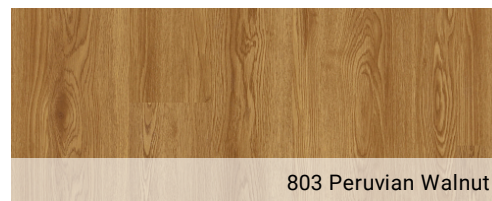

803 Peruvian Walnut

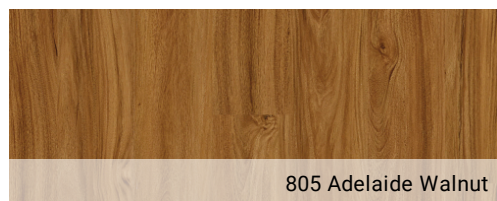

805 Adelaide Walnut



806 Alpine Ash



810 Melbourne Oak



813 Reims Oak



COREtec One 6"

Performance

Static Load (ASTM F970)	Passes
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Smoke Density (ASTM E662)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Warranties

- USF 25 Years
- USF 5 Year Light Commercial
- Wpc 15 Yr Com Ltd

Certifications

GreenGuard (Certification, Gold, Private Label) Certified