

Product Specifications

Style Number	VV704	
Construction	Waterproof Foamed Core	
Edge Profile	Pressed Bevel	
Nominal Dimensions	7" wide, 48" long	
	US Units	Metric Units
Actual Product Width	7.05"	18 cm
Actual Product Length	48.03"	122 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.295"	7.5 mm
Core Thickness	0.197"	5 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.039"	1 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	


Packaging

Area per Box	18.8 sq ft	2 sq m
Pieces per Box	8 pcs	
Weight per Box	30.42 lbs	13.79 kg
Boxes per Pallet	70 boxes	



3016 Blended Umber

Colors

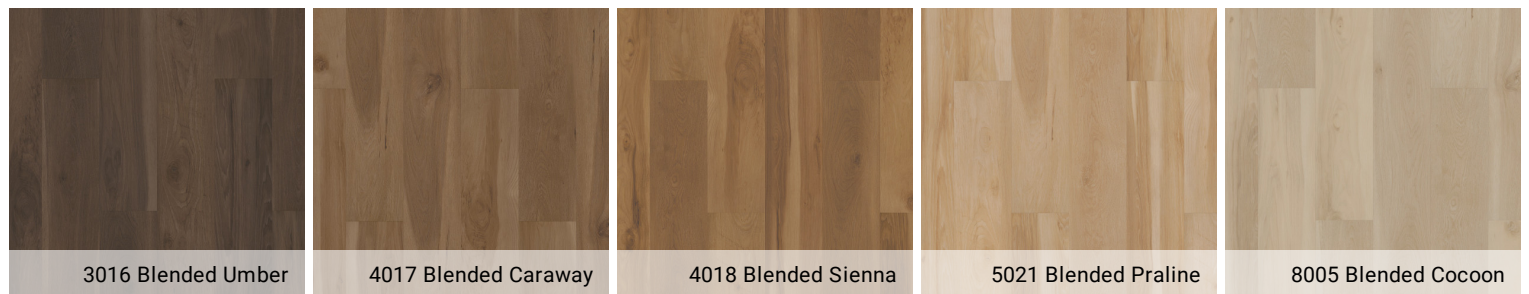

Warranties

USF Lifetime Limited
USF 10 Year Medium Commercial


Certifications

GreenGuard (Certification, Gold, Private Label) Certified




CT HD INT 7X48


Coordinating Trim

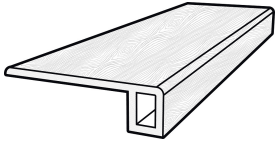


Baby Threshold*
BT7CT | 94"



T-Molding*
TM7CT | 94"



Quarter Round
QTRCT | 94"



Flush Stairnose
FS7HU | 94"

*Packaged with molding track

Stair Tread



Stair Tread
03Z70 | 48"