
COREtec®

Product Specifications

Style Number	VV968	
Construction	Solid Polymer Core	
Edge Profile	Enhanced Painted Bevel	
Nominal Dimensions	9" wide, 72" long	
	US Units	Metric Units
Actual Product Width	9.06"	23 cm
Actual Product Length	72.83"	185 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.255"	6.5 mm
Core Thickness	0.209"	5.3 mm
Attached Underlayment	Attached Cork	
Attached Underlayment	0.047"	1.2 mm
Thickness		
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	
Packaging		
Area per Box	27.48 sq ft	3 sq m



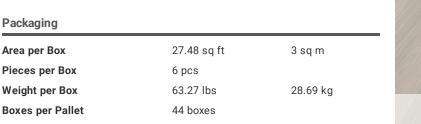

Colors

1030 Rushden Walnut	4042 Cardington Walnut	5041 Bromham Walnut	5042 Kempston Walnut

Performance

Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

COREtec, manufactured by USFloors | 3580 Corporate Dr. | Dalton, GA 30721 | www.COREtecFloors.com

COREtec Pro Premium VV968

COREtec Pro Premium VV968




Warranties

USF Lifetime

USF 15 Year Heavy Commercial

Coordinating Trim

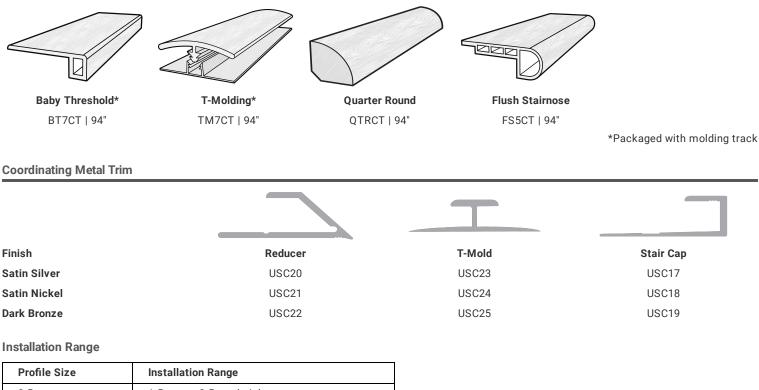

	5
3.5mm	1.5mm to 3.5mm heights
5.5mm	3.6mm to 5.5mm heights
8mm	6mm to 8mm heights

Stair Tread

Stair Tread 03Z70 | 48" 5)