

Streamlined in either Brushed Polished Nickel or Oiled Bronze finishes with an integrated white frost light kit.

Heavy-Duty, 3-Speed Reversible Motor

Dual Mount

FEATURES

4" Downrod (Included)

Limited Lifetime Warranty

Custom Reversible Stellar Blades (Included)

Integrated LED Light Source (Dimmable)

Hard-Wired Dual Wall Control -4 Speed Fan Control and Full Range Dimmer **OR** request with UCI-2000 remote or wall control

LED Specs:

Color Temp 3000K Lumens 900 lm CRI Watts 90 12


LED Module is Guaranteed for 5 Years

*Compare: 49" to 60" ceiling fans have Energy Guide Airflow efficiencies ranging from approximately 51 to 176 cubic feet per minute per watt at high speed.

SPECS

Blade Sweep Option 52"
Number of Blades5
Blade Pitch13.5°
Motor Size (MM) 172 x 17
AMPS (HI Speed) <1
Shipping Wt. (lbs.) 22.27
CU. FT. in Carton 1.66
Energy Guide Airflow (Cubic Feet Per Minute) 3,657
Energy Guide Wattage 45 Watts
Energy Guide Efficiency (CFM Per Watt)81
Energy Guide Estimated Yearly Cost* \$13
Airflow at High Speed (Cubic Feet Per Minute) 5,325

CEILING DROP DIMENSIONS



A: 4.5" DR - 16" C: 8.66"


E: 10.0"

B: 4.5" DR - 10.5" **D:** 5.98" **DR** = Downrod







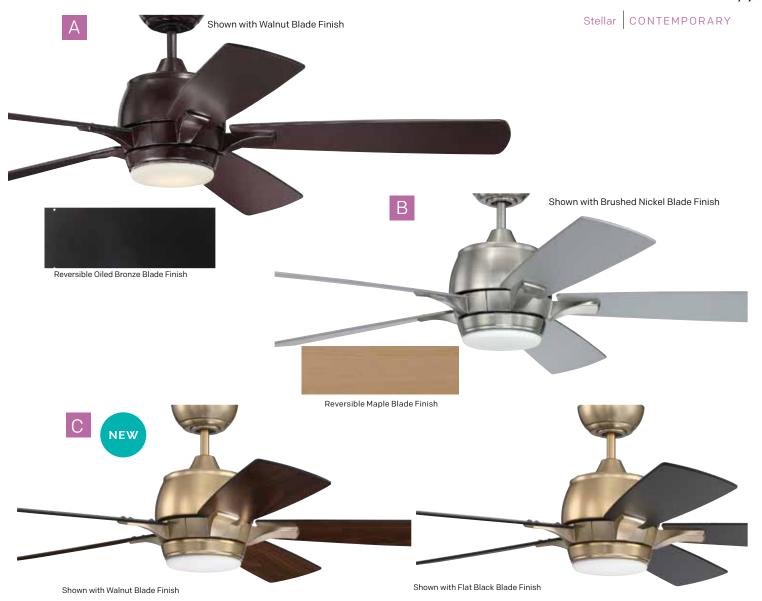

| Oiled Bronze 52" Stellar

Model STE520B5

Blade Oiled Bronze/Walnut

Light Integrated, White Frost Glass

Brushed Polished Nickel 52" Stellar

Model STE52BNK5

Blade Brushed Nickel/Maple

Light Integrated, White Frost Glass

Satin Brass 52" Stellar

Model STE52SB5

Blade Flat Black/Walnut

Light Integrated, White Frost Glass

AVAILABLE FINISHES BLADE OPTIONS LIGHT KIT OPTIONS

BNK Brushed Polished Nickel

Included

Integrated

OB Oiled Bronze

SB Satin Brass

FAN CONTROL OPTIONS

Standard Configuration: CM-7W Dual Wall Control – 4 Speed Fan Control and Full Range Dimmer





Alternate Configuration: UCI-2000 remote or wall control



Use these order codes: STE52BNK5-UCI

STE52BNK5-UCI STE520B5-UCI STE52SB5-UCI

