

CRYST RAMA

ASSEMBLY INSTRUCTION MODEL#LEN-250-OP-BF

FRONT VIEW

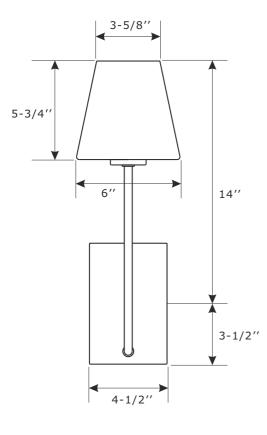

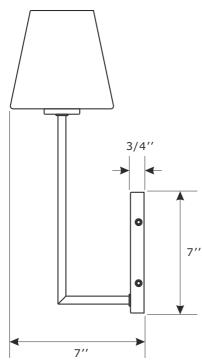

SIDE VIEW



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate

local electrical codes.

You will need 1- Medium Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE

How to install

- 1. Install the mounting plate to the outlet box using two outlet box screws.
- 2. Install backplate onto the mounting plate, and secure with the screws.
- 3. Install the glass shade over the socket, and secure with the socket ring.
- 4. Install the bulb(not included) into socket.



CRYST ΑΜΑ (>

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL#LEN-250-OP-BF

Part Number

- Part Numbers
- A. (1)-Mounting hardware
- B. (1)-Mounting plate
- C. (1)-Backplate L7"xW4-1/2"xD3/4" #XRF250BFBKP4.5IN
- D. (4)-Screw
- E. (1)-Socket
- F. (1)-Glass shade #XRF250GLASHA6IN
- G. (1)-Socket ring

