
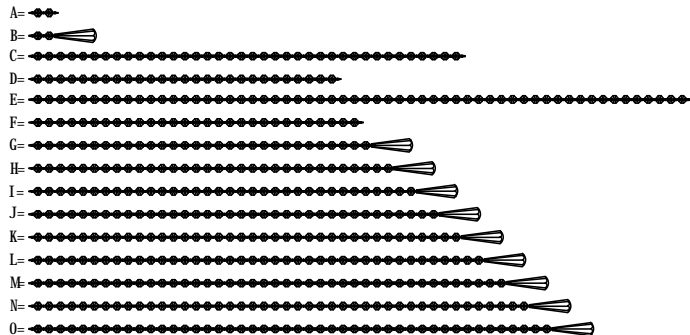


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #ARC-1919-GA-CL-MWP

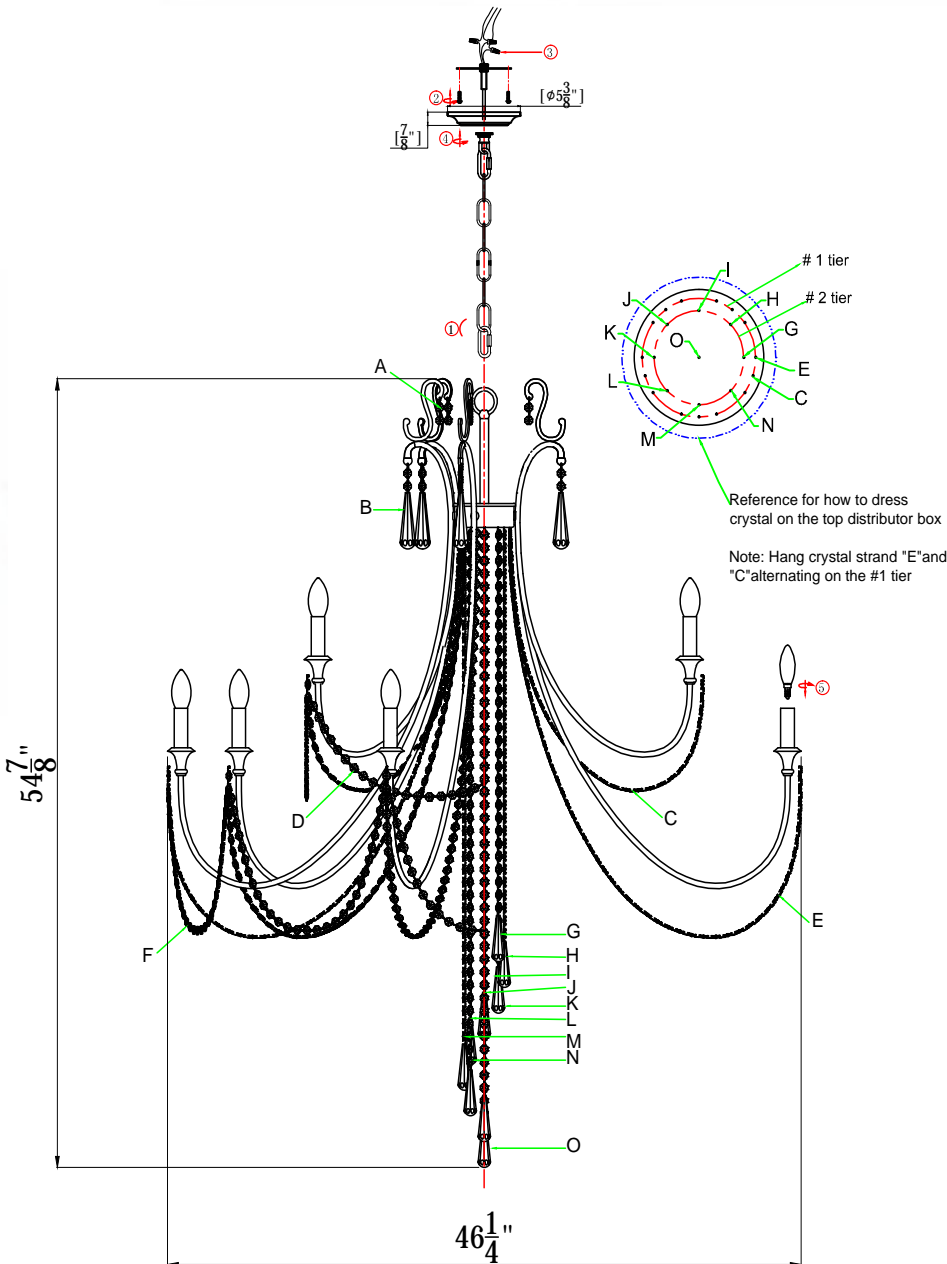

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 15 Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE

This fixture is Dry rated

How to Install

- Do a complete inventory of all parts and components before you start installing.
- Assemble one end of chain to fixture loop by opening quick link. Fasten mounting hardware to junction box with machine screws. After wires are connected, turn screw collar loop onto nipple, then place canopy up against ceiling and lock by screw collar loop ring.
- After safely attaching fixture into junction box, install bulbs and proceed to connecting the power.
- When you begin to dress the fixture, start with package labeled (A).
- IMPORTANT: Apply crystal sets in alphabetical order.

Crystal Sets

- A. 8sets 2 *14mm
- B. 8sets 2 *14mm + 1*76mm drop
- C. 5sets 36*14mm
- D. 5sets 27*14mm
- E. 10sets 44*14mm
- F. 10sets 29*14mm
- G. 1set 30*14mm + 1*76mm drop
- H. 1set 32*14mm + 1*76mm drop
- I. 1set 34*14mm + 1*76mm drop
- J. 1set 36*14mm + 1*76mm drop
- K. 1set 38*14mm + 1*76mm drop
- L. 1set 40*14mm + 1*76mm drop
- M. 1set 42*14mm + 1*76mm drop
- N. 1set 44*14mm + 1*76mm drop
- O. 1set 46*14mm + 1*76mm drop

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

PART NUMBER MODEL #ARC-1919-GA-CL-MWP

Part Number

Part Numbers

- A. (1)-Mounting Hardware
- B. (1)-Canopy; $\phi 5 \times H1$ "
(XBN1917GACAN5IN)
- C. (1)-Screw Collar Loop Ring
- D. (1)-Screw Collar Loop
- E. (1)-Chain; $\phi 1/5 \times 72$ "
(XBN1917GACHA5MM)
- F. (1)-Fixture Loop; $\phi 2$ "
- G. (1)-Top Stem; L6"
- H. (12)-Candle Sleeve; L2 4/5"
(XBN1919GACDL2.8IN)
- I. (1)-Finial; H1 1/5"
(XBN1917GAFIN)

