





ASSEMBLY INSTRUCTION MODEL# BRH-M524-GA

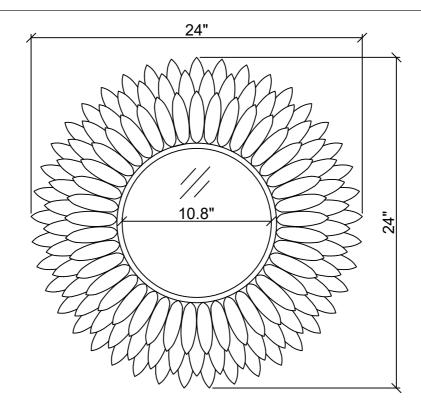

When removing the mirror from the box, please gently hold and lift from the outermost leaf ONLY.

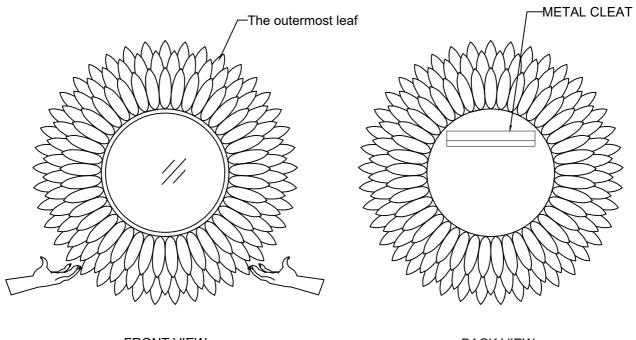

FRONT VIEW

BACK VIEW





ASSEMBLY INSTRUCTION MODEL# BRH-M524-GA

INSTALLATION INSTRUCTIONS

ITEMS INCLUDED

Anchor(A):


Ø7.5[mm]x36[mm]x3 Wall cleat:

NECESSARY TOOLS (NOT INCLUDED)











Step 1

Place the metal cleat at the desired wall location and mark three points at the center of the hole on the metal cleat using the pencil.




Step 2

Drill the holes at the marked points and insert the anchors into the hole.



Step 3

Mount the metal cleat onto the wall surface using the screws supplied. Make sure that the metal cleat is straight using a level.



Step 4

Gently hold the outermost leaf of the mirror and hang it onto the metal cleat.