

CRYSTORAMA



LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #LOF-5007-AG

There is a safety cable supplied with this fixture, as it weighs over 50lbs. The fixture should be mounted to the ceiling independent of the outlet box.



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.




You will need 7-Candelabra Base Bulb

40 Watts Recommended 60 Watts Max

USE LED BULBS FOR EXTENDED USE


This fixture is Dry rated

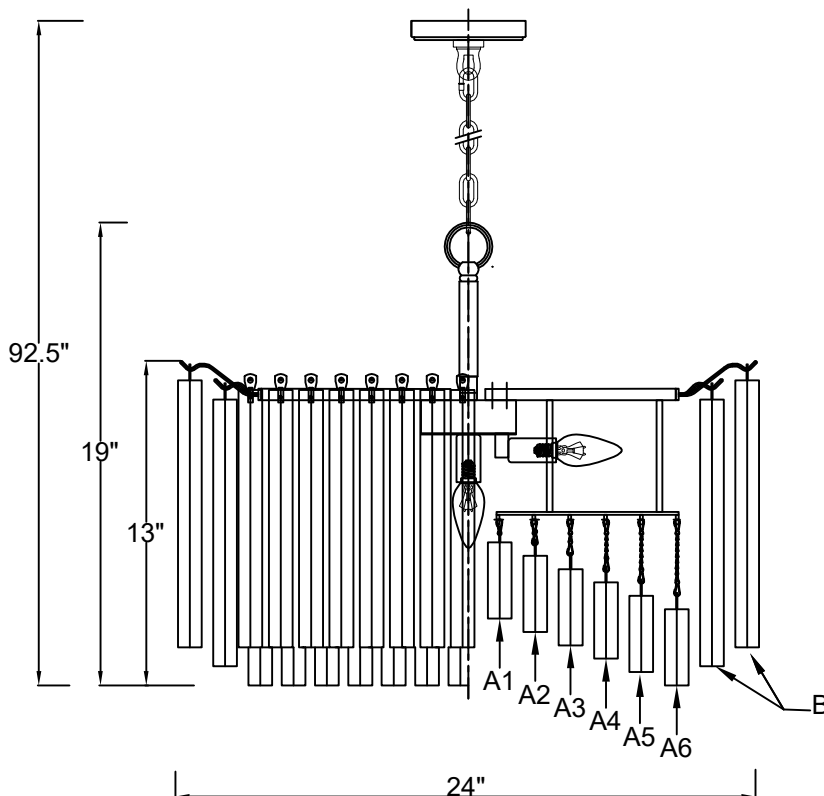

DETAILED ILLUSTRATION

How to Install

1. Slip the wire through the threaded pipe, then screw the threaded pipe into the coupler on the top of the frame. Slide the metal tube over the threaded pipe and secure with the fixture loop.
2. Decide the preferred hanging height and choose the correct length of chain needed.
3. Install the mounting hardware on the outlet box.
4. Raise the fixture up to the ceiling and do the wire connections. Secure the canopy over the outlet box using the collar ring.
5. Dress the crystals as illustrated.

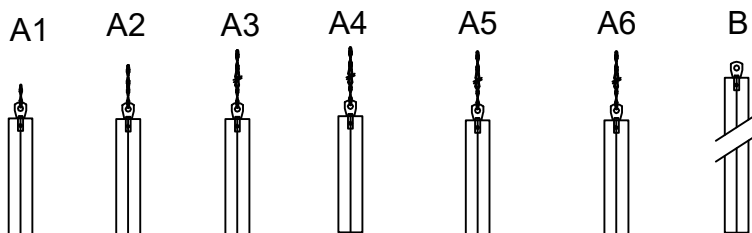

Crystal Sets

- A1. 6Sets. (1)25x80mm + Chain&Pin Total length 103mm
A2. 14Sets. (1)25x80mm + Chain&Pin Total length 117mm
A3. 22Sets. (1)25x80mm + Chain&Pin Total length 131mm
A4. 30Sets. (1)25x80mm + Chain&Pin Total length 145mm
A5. 36Sets. (1)25x80mm + Chain&Pin Total length 159mm
A6. 42Sets. (1)25x80mm + Chain&Pin Total length 173mm
B. 108Sets. (1)25x280mm

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

CRYSTORAMA





LIGHTING THE WAY FOR SIXTY YEARS

PART NUMBER MODEL #LOF-5007-AG

Part Number


Part Numbers

- A. (2)-Wire Connector
- B. (1)-Heavy Duty Mounting Hardware
- C. (1)-Canopy; w4.75" x h1" (XFB5005AGCAN4.75IN)
- D. (1)-Collar Ring
- E. (1)-Collar Loop
- F. (1)-Chain; 72", 5mm (XFB5005AGCHA5MM)
- G. (1)-Ground Wire
- H. (1)-Cable Wire
- I. (1)-Fixture Loop
- J. (1)-Metal Tube; 4", 16MM thickness (XFB5005AGROD4IN)
- K. (1)-Threaded Pipe; 4.75", 12MM thickness
- L. (1)-Metal Frame

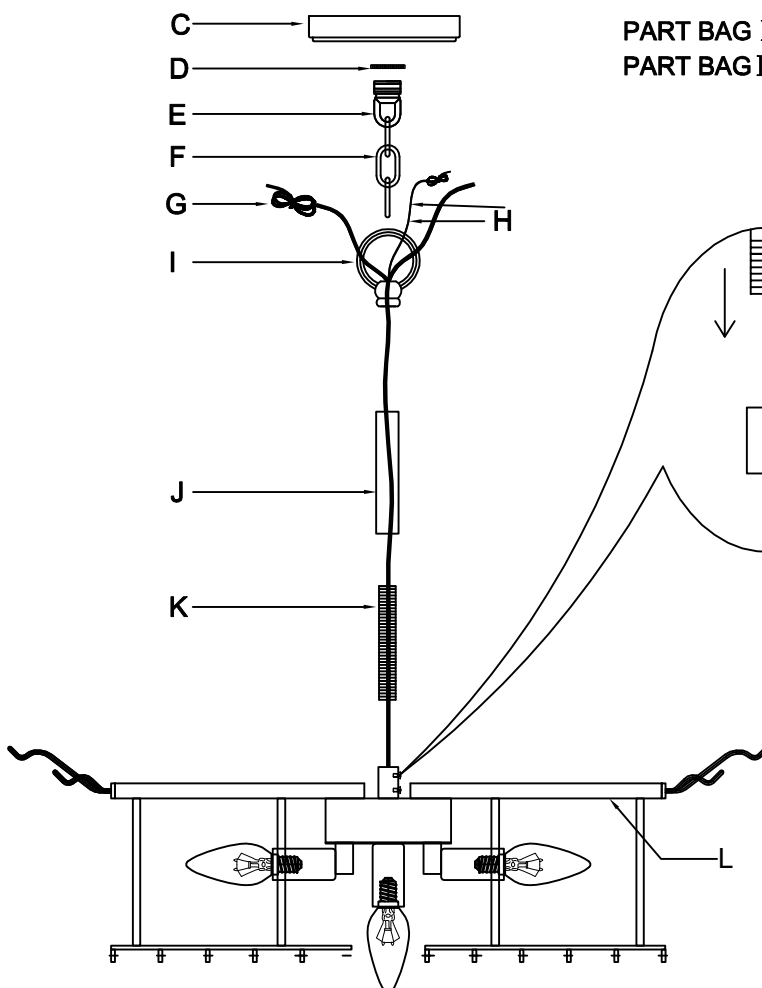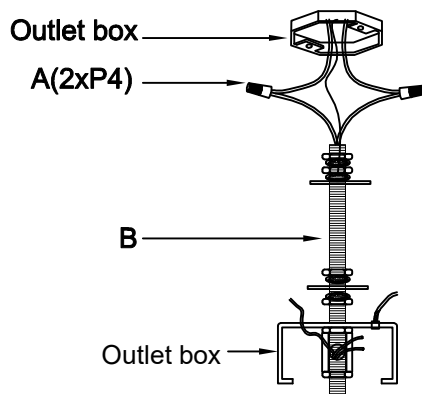


PART BAG I : Includes Parts A

PART BAG II : Includes Parts B,D,E



Before screwing the threaded pipe, please loosen the set screws on the side of the coupling, tighten it when the threaded pipe is screwed all the way down.

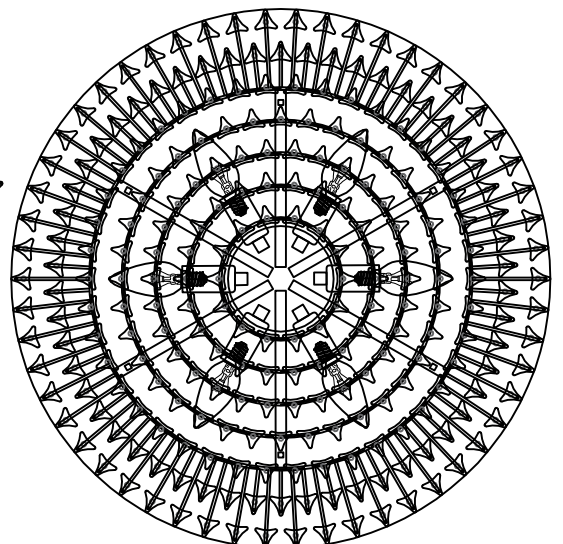


CRYSTORAMA



LIGHTING THE WAY FOR SIXTY YEARS

PART NUMBER MODEL #LOF-5007-AG

SAFETY CABLE INSTALLATION INSTRUCTIONS

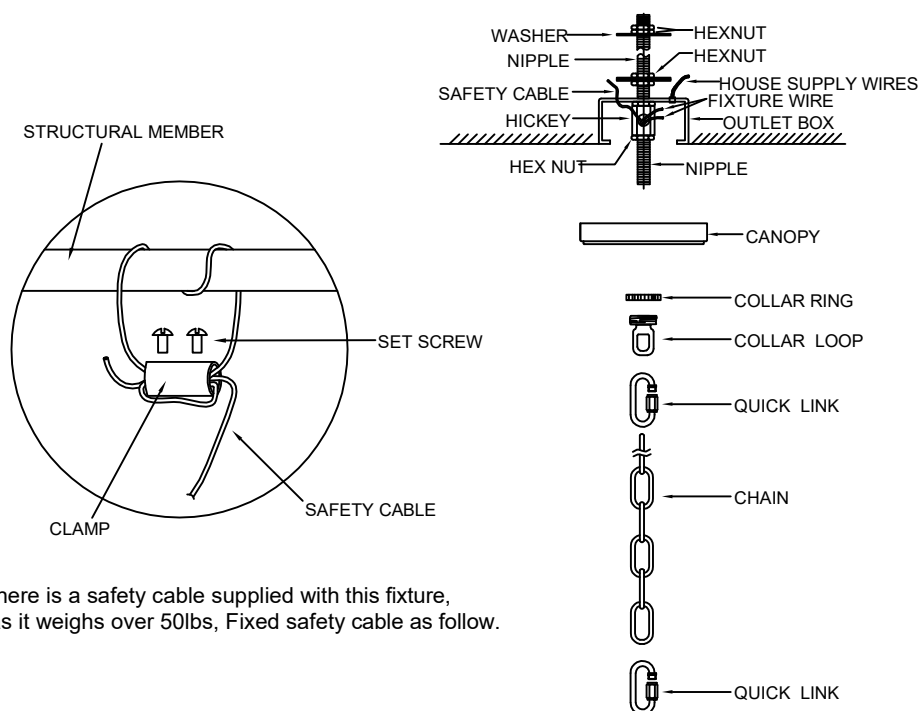

There is a safety cable supplied with this fixture, as it weighs over 50lbs, Fixed safety cable as follow.

IMPORTANT:

FOR A SAFE AND SECURE INSTALLATION, THESE FIXTURES MUST BE INSTALLED BY MEANS OF SUPPORTS THAT ARE INDEPENDENT OF THE OUTLET BOX.

SUGGESTED INSTALLATION:

1. Provide a 1/4 IPS pipe with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the outlet, as shown.
2. Assemble the screw collar loop, nipple, hex nuts and hickey to center 1/4 IPS support pipe and adjust overall length to allow the collar ring to hold the canopy flush to the ceiling. When the adjustments have been completed secure the hex nut, as shown.
3. Use one quick link to connect fixture loop and the bottom of chain. Slide the screw collar ring over the upper end of the chain, through the (Finished side down). Then use another quick link to connect collar loop and the top of chain.
4. Lace the fixture wires, ground wires and safety cable through the chain and screw collar loop, exiting through the side of HICKEY. Proceed to attach the FIXTURE GROUND WIRE to HOUSE GROUND WIRE using wire connector. Using wire connectors, connect the HOUSE WHITE WIRE to the FIXTURE SUPPLY WIRE (WHITE OR RIBBED SIDE); connect the HOUSE BLACK (or RED) WIRE to the FIXTURE SUPPLY WIRE (BLACK or SMOOTH SIDE). Wrap all connectors with approved electrical tape. Wrap safety cable around outlet box brace and pull cable taut. Secure cable with the clamp and (2) set screws provided, as shown.
5. Push the CANOPY upward over the OUTLET BOX. Be sure that all wires are carefully tucked into the OUTLET BOX cavity. Secure canopy against ceiling by threading CANOPY LOCK RING onto the CANOPY LOOP. Tighten until snug.