




ASSEMBLY INSTRUCTION MODEL#XAV-B9319-VG-BL

ROD 1

-ROD 2

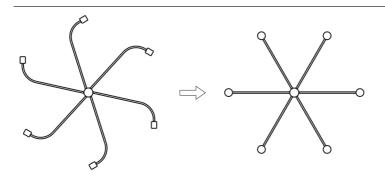

ROTATE FIXTURE ARMS UP 90°

1′′

ROD 1 = ■□ 1Pc

ROD 2= **■**□□□

57-1/4"




All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 6-Medium Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE This fixture is Damp rated

How to install

- 1. Rotate the arm upwards 90 degree to make sure they are straight
- 2. Slip the center stem assembly along wire and thread onto the nipple located on the top of the light cluster.
- 3. Determine the preferred hanging height and adjust to the required rods.
- 4. Feed the wires through the rods and connect them together.
- 5. Slip collar ring and canopy over the rod assembly.
- 6. Slip mounting bar with swivel along wire and thread it into the top of the rod assembly.
- 7. Raise fixture up and attach mounting bar to the outlet box using two outlet box screws.
- 8. Slide collar ring up to canopy and thread it onto the
- 10. Install the bulb(not included) into the socket.

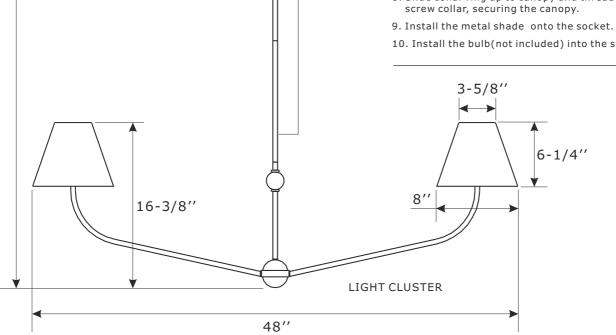





ASSEMBLY INSTRUCTION MODEL#XAV-B9319-VG-BL

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy W5"xH1" #XRF9315VGBLCAN5IN
- C. (1)-Rod D1/2"xL6" #XRF9302VGROD6IN
- D. (3)-Rod D1/2"xL12" #XRF9302VGROD12IN
- E. (1)-Center stem assembly
- F. (6)-Socket
- G. (6)-Metal shade W8"xH6-1/4" #XRF9316BLSHA8IN

