

## CounterAttack LED

120V Portable / Linkable

### Fixture

- 120v portable/hardwire
- 35,000 hour LED, 2,850k +/- 150k
- Dimmable with standard Incandescent dimmer (must meet minimum load of dimmer)
- Maximum of 120 LED light engines per power feed

### Body

- Metal Construction
- Hinged, removable, UV coated, glass prismatic diffuser for maximum light distribution
- Trade-sized knockouts on back and top for through-wiring, wiremold, flex, romex or rigid conduit
- Internal connectors allow instant hardwiring without wire nuts
- On/Off switch
- UL/C-UL Listed for damp location

### Finishes

- Bronze (BZ), Stainless Steel (SS) and White (WT)


### NCA-LED-8

120V 8" 1-4.5W Light Engines




### NCA-LED-16

120V 16" 2-4.5W Light Engines



### NCA-LED-24



120V 24" 3-4.5W Light Engines

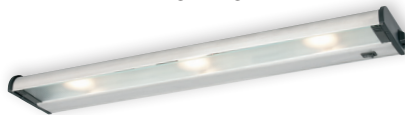

### NCA-LED-32

120V 32" 4-4.5W Light Engines



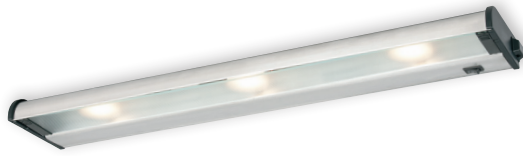

### CounterAttack LED

35,000 hour LED, 2,850k +/- 150k 120v portable/hardwire

	L X W X H	Lamps	Type	White – WT	Bronze – BZ	Stainless Steel – SS
8"	8" x 5" x 1 1/2"	1	<b>SPEEDLINK</b>	NCA-LED-8-WT	NCA-LED-8-BZ	NCA-LED-8-SS
16"	16" x 5" x 1 1/2"	2	<b>SPEEDLINK</b>	NCA-LED-16-WT	NCA-LED-16-BZ	NCA-LED-16-SS
24"	24" x 5" x 1 1/2"	3	<b>SPEEDLINK</b>	NCA-LED-24-WT	NCA-LED-24-BZ	NCA-LED-24-SS
32"	32" x 5" x 1 1/2"	4	<b>SPEEDLINK</b>	NCA-LED-32-WT	NCA-LED-32-BZ	NCA-LED-32-SS

## Counter Attack LED

#### Fixture

- 120v portable/hardwire
- 35,000 hour LED, 2,850k +/- 150k
- Dimmable with standard Incandescent dimmer (must meet minimum load of dimmer)
- Maximum of 120 LED light engines per power feed

#### Finishes

- Bronze (BZ), Stainless Steel (SS) and White (WT)

#### Body

- Metal Construction
- Hinged, removable, UV coated, glass prismatic diffuser for maximum light distribution
- Trade-sized knockouts on back and top for through-wiring, wiremold, flex, romex or rigid conduit
- Internal connectors allow instant hardwiring without wire nuts
- On/Off switch
- UL/C-UL Listed for damp location



#### SpeedLink

- SpeedLink™ allows fast and easy linking of multiple units.
- Custom connectors allow end-to-end mounting with instant electrical connections – no wiring between units
- If not mounted end-to-end, SpeedLink™ inter-connect cables allow easy and fast linking.
- Master Switch module (CS-1) controls a run of CounterAttack SpeedLink™ with a single switch. Available in WT, BZ and SS.



End-to-End connections - CS-1 Master Switch Portable Cord and Plug standard

#### SpeedLink Accessories

	L X W X H	White	Bronze	Stainless Steel
Master Switch	5" x 3 3/4" x 1 1/2"	<b>CS-1</b>	<b>CS-1BZ</b>	<b>CS-1SS</b>
Portable Cord	96"	<b>PL-96 WT</b>	<b>PL-96 BK</b>	



A Division of Troy-CSL Lighting, Inc.

14508 Nelson Avenue City of Industry CA 91744 Tel: 626.336.4511 Fax: 626.330.4266 www.csllighting.com