

36-INCH FREEZER COLUMN, LEFT-HINGE PANEL-READY

DRZ36980LAP







PRODUCT FEATURES


- > Full height door with true flush cabinet integration without exposed venting grille
- SteelCool™ Stainless Steel Interior illuminated by $3DLighting^{TM}$
- → Push-To-Open[™] Door Assist opens the door upon a slight push for a luxuriously convenient experience
- Dual Icemaker with Standard and Cocktail Ice™
- → Best-in class food preservation with dedicated evaporator/ compressor and Precise Cooling Technology

TEMPERATURE RANGES	
FREEZER	5°F (-15°C) TO -8°F (-23°C)
FREEZER - POWER FREEZE	-8°F (-23°C)
DIMENSIONS & WEIGHT	
APPLIANCE DIMENSIONS (H X W X D) (IN.)	83 3/8" X 35 3/4" X 23 13/16"
REQUIRED CUTOUT SIZE (H X W X D) (IN.)	84" X 36" X 25"
NET WEIGHT (LBS)	580 LBS.


GENERAL PROPERTIES	
PANEL READY	YES
DOOR SWING	LEFT
PUSH-TO-OPEN™ DOOR ASSIST	YES
ICEMAKER	DUAL ICEMAKER FOR STANDARD AND COCKTAIL ICE™
LIGHTING	3DLIGHTING™
INTERIOR MATERIAL	STEELCOOL™ STAINLESS STEEL INTERIOR
FULL WIDTH SHELVES	3 EA
SHELF MATERIAL	TEMPERED, METAL TRIM, SPILL-PROOF
FULL EXTENSION DRAWERS AT 90° DOOR OPENING ANGLE	YES
HIDDEN COMPARTMENT WITH FLIP-UP COVER	1 EA
FREEZER DRAWER	2 EA
DOOR BINS	4 EA
DOOR OPEN ALARM	YES
SPECIAL MODES	SABBATH MODE
CAPACITY	
TOTAL UNIT GROSS CAPACITY (CU.FT.) - AHAM	21.4 CU. FT.
REFRIGERATOR GROSS CAPACITY (CU.FT.)	21.4 CU. FT.
PERFORMANCE	
DEDICATED EVAPORATOR & COMPRESSOR SYSTEM	YES
POWER FREEZE	YES
DEFROST PROCESS	FROST-FREE
PRECISE COOLING	YES
EFFICIENCY	
ENERGY STAR QUALIFIED	YES
ANNUAL ENERGY CONSUMPTION	580 KWH/YEAR
TECHNICAL DETAILS	
CURRENT (A)	3
VOLTS (V)	115
FREQUENCY (HZ)	60
POWER CORD LENGTH (IN.)	78 3/4"
PLUG TYPE	120 V, 3 PRONG
WARRANTY	
LIMITED, ENTIRE APPLIANCE, PARTS AND LABOR ON ANY PART OF THE REFRIGERATOR	2 YEAR
LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS AND LABOR	3RD TO 6TH YEAR
LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS ONLY	7TH TO 12TH YEAR
LIMITED WARRANTY FOR COMPRESSOR; PARTS ONLY	13TH TO 15TH YEAR




APPLIANCE DIMENSIONS	
A (TOTAL WIDTH INCL. PANELS)	35 3/4" (908 MM)
B (TOTAL DEPTH WITH 3/4" PANEL)	25" (635 MM)
C (HEIGHT)	83 3/8" (2118MM)
D	35 5/8" (905 MM)
Е	62 7/8" (1597 MM)
F	20 9/16" (496 MM)
G	61 5/16" (1556 MM)



CUSTOM PANEL DIMENSIONS	
A-1 (WIDTH)	35 3/4" (908MM)
A-2 (HEIGHT)	79 7/8" (2,029MM)
A-3 (DEPTH)	3/4" (19MM)
MAX WEIGHT	66.0 LBS. (30KG)



INSTALL	ATION CUTOUT DIMENSIONS
A (WIDTH)	36" (914MM)
B (DEPTH)	25" (635MM)
C (HEIGHT)	84" (2,134MM)
A'	9" (228MM)
B'	26" (660MM)
C'	80" (2,032MM)

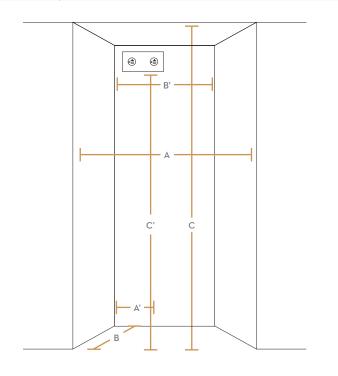

ACCESSORIES	
GRAPHITE STAINLESS STEEL - 36" PANEL (LEFT HINGE)	RAC36DPLHMS
GRAPHITE STAINLESS STEEL - 36" KICK PLATE	RAC36TKBBMS
GRAPHITE STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAAMS
SILVER STAINLESS STEEL - 36" PANEL (LEFT HINGE)	RAC36DPLHSR
SILVER STAINLESS STEEL - 36" KICK PLATE	RAC36TKBBSR
SILVER STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAASR
SILVER STAINLESS STEEL - DACOR PRO HANDLE	RACOOPHAASR
PAIR INSTALLATION KIT	RACOOCPAAAA
WATER FILTER	RACOOWFAAAA
DEODORIZING FILTER	RACOODFAAAA



36-INCH FREEZER COLUMN, RIGHT-HINGE PANEL-READY

DRZ36980RAP







PRODUCT FEATURES


- > Full height door with true flush cabinet integration without exposed venting grille
- SteelCool™ Stainless Steel Interior illuminated by $3DLighting^{TM}$
- → Push-To-Open[™] Door Assist opens the door upon a slight push for a luxuriously convenient experience
- Dual Icemaker with Standard and Cocktail Ice™
- → Best-in class food preservation with dedicated evaporator/ compressor and Precise Cooling Technology

TEMPERATURE RANGES	
FREEZER	5°F (-15°C) TO -8°F (-23°C)
FREEZER - POWER FREEZE	-8°F (-23°C)
DIMENSIONS & WEIGHT	
APPLIANCE DIMENSIONS (H X W X D) (IN.)	83 3/8" X 35 3/4" X 23 13/16"
REQUIRED CUTOUT SIZE (H X W X D) (IN.)	84" X 36" X 25"
NET WEIGHT (LBS)	580 LBS.


GENERAL PROPERTIES		
PANEL READY	YES	
DOOR SWING	RIGHT	
PUSH-TO-OPEN™ DOOR ASSIST	YES	
ICEMAKER	DUAL ICEMAKER FOR STANDARD AND COCKTAIL ICE™	
LIGHTING	3DLIGHTING™	
INTERIOR MATERIAL	STEELCOOL™ STAINLESS STEEL INTERIOR	
FULL WIDTH SHELVES	3 EA	
SHELF MATERIAL	TEMPERED, METAL TRIM, SPILL-PROOF	
FULL EXTENSION DRAWERS AT 90° DOOR OPENING ANGLE	YES	
HIDDEN COMPARTMENT WITH FLIP-UP COVER	1 EA	
FREEZER DRAWER	2 EA	
DOOR BINS	4 EA	
DOOR OPEN ALARM	YES	
SPECIAL MODES	SABBATH MODE	
CAPACITY		
TOTAL UNIT GROSS CAPACITY (CU.FT.) - AHAM	21.4 CU. FT.	
REFRIGERATOR GROSS CAPACITY (CU.FT.)	21.4 CU. FT.	
PERFORMANCE		
DEDICATED EVAPORATOR & COMPRESSOR SYSTEM	YES	
POWER FREEZE	YES	
DEFROST PROCESS	FROST-FREE	
PRECISE COOLING	YES	
EFFICIENCY		
ENERGY STAR QUALIFIED	YES	
ANNUAL ENERGY CONSUMPTION	580 KWH/YEAR	
TECHNICAL DETAILS		
CURRENT (A)	3	
VOLTS (V)	115	
FREQUENCY (HZ)	60	
POWER CORD LENGTH (IN.)	78 3/4"	
PLUG TYPE	120 V, 3 PRONG	
WARRANTY		
LIMITED, ENTIRE APPLIANCE, PARTS AND LABOR ON ANY PART OF THE REFRIGERATOR	2 YEAR	
LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS AND LABOR	3RD TO 6TH YEAR	
LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS ONLY	7TH TO 12TH YEAR	
LIMITED WARRANTY FOR COMPRESSOR; PARTS ONLY	13TH TO 15TH YEAR	




APPLIANCE DIMENSIONS	
A (TOTAL WIDTH INCL. PANELS)	35 3/4" (908 MM)
B (TOTAL DEPTH WITH 3/4" PANEL)	25" (635 MM)
C (HEIGHT)	83 3/8" (2118MM)
D	35 5/8" (905 MM)
Е	62 7/8" (1597 MM)
F	20 9/16" (496 MM)
G	61 5/16" (1556 MM)



CUSTOM PANEL DIMENSIONS	
A-1 (WIDTH)	35 3/4" (908MM)
A-2 (HEIGHT)	79 7/8" (2,029MM)
A-3 (DEPTH)	3/4" (19MM)
MAX WEIGHT	66.0 LBS. (30KG)



INSTALL	ATION CUTOUT DIMENSIONS
A (WIDTH)	36" (914MM)
B (DEPTH)	25" (635MM)
C (HEIGHT)	84" (2,134MM)
A'	9" (228MM)
B'	26" (660MM)
C'	80" (2,032MM)

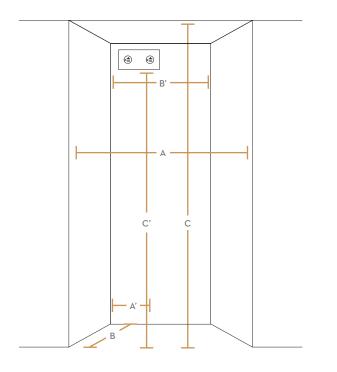

ACCESSORIES	
GRAPHITE STAINLESS STEEL - 36" PANEL (RIGHT HINGE)	RAC36DPRHMS
GRAPHITE STAINLESS STEEL - 36" KICK PLATE	RAC36TKBBMS
GRAPHITE STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAAMS
SILVER STAINLESS STEEL - 36" PANEL (RIGHT HINGE)	RAC36DPRHSR
SILVER STAINLESS STEEL - 36" KICK PLATE	RAC36TKBBSR
SILVER STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAASR
SILVER STAINLESS STEEL - DACOR PRO HANDLE	RACOOPHAASR
PAIR INSTALLATION KIT	RACOOCPAAAA
WATER FILTER	RACOOWFAAAA
DEODORIZING FILTER	RACOODFAAAA