

36-INCH REFRIGERATOR COLUMN, LEFT-HINGE PANEL-READY

DRR36980LAP







PRODUCT FEATURES


- → Full height door with true flush cabinet integration without exposed venting grille
- → SteelCool™ Stainless Steel Interior illuminated by 3DLighting™
- → Push-To-Open[™] Door Assist opens the door upon a slight push for a luxuriously convenient experience
- Internal Water Dispenser for easy access to clean, filtered water
- → iQ RemoteView[™] Cameras (Wi-Fi) enables users to check what's in your fridge from your phone

TEMPERATURE RANGES	
REFRIGERATOR	34°F (1°C) TO 44°F (7°C)
REFRIGERATOR - POWER COOL	34°F (1°C)
FRESHZONE™ DRAWER	37°F (3°C) / 33°F (-1°C)/29°F (-1°C)
DIMENSIONS & WEIGHT	
APPLIANCE DIMENSIONS (H X W X D) (IN.)	83 3/8" X 35 3/4" X 23 13/16"
REQUIRED CUTOUT SIZE (H X W X D) (IN.)	84" X 36" X 25"
NET WEIGHT (LBS)	567


YES
LEFT
YES
YES
YES (2 EA)
YES
3DLIGHTING™
STEELCOOL™ STAINLESS STEEL INTERIOR
4 EA
TEMPERED GLASS SHELVES W/METAL TRIM
YES
YES - CHEESE (37°F) / COLD DRINKS (33°F) / MEAT (29°F)
2 EA
4 EA
YES
SABBATH MODE
21.6 CU. FT.
21.6 CU. FT.
YES
YES
YES
YES
290 KWH/YEAR
7
3 115
60
78 3/4"
120 V, 3 PRONG
2 YEAR
3RD TO 6TH YEAR
3RD TO 6TH YEAR 7TH TO 12TH YEAR




APPLIANCE DIMENSIONS	
A (TOTAL WIDTH INCL. PANELS)	35 3/4" (908 MM)
B (TOTAL DEPTH WITH 3/4" PANEL)	25" (635 MM)
C (HEIGHT)	83 3/8" (2118MM)
D	35 5/8" (905 MM)
Е	62 7/8" (1597 MM)
F	20 9/16" (496 MM)
G	61 5/16" (1556 MM)



CUSTOM PANEL DIMENSIONS		
A-1 (WIDTH)	35 3/4" (908MM)	
A-2 (HEIGHT)	79 7/8" (2,029MM)	
A-3 (DEPTH)	3/4" (19MM)	
MAX WEIGHT	66.0 LBS. (30KG)	



INSTALL A	ATION CUTOUT DIMENSIONS
A (WIDTH)	36" (914MM)
B (DEPTH)	25" (635MM)
C (HEIGHT)	84" (2,134MM)
A'	9" (228MM)
B'	26" (660MM)
C'	80" (2,032MM)

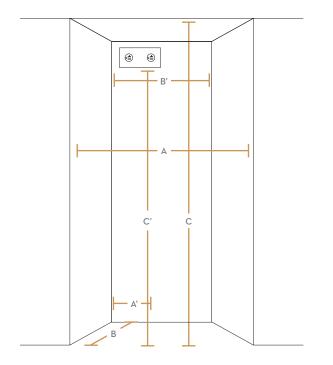

ACCESSORIES	
GRAPHITE STAINLESS STEEL - 36" PANEL (LEFT HINGE)	RAC36DPLHMS
GRAPHITE STAINLESS STEEL - 36" KICK PLATE	RAC36TKBBMS
GRAPHITE STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAAMS
SILVER STAINLESS STEEL - 36" PANEL (LEFT HINGE)	RAC36DPLHSR
SILVER STAINLESS STEEL - 36" KICK PLATE	RAC36TKBBSR
SILVER STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAASR
SILVER STAINLESS STEEL - DACOR PRO HANDLE	RACOOPHAASR
PAIR INSTALLATION KIT	RACOOCPAAAA
WATER FILTER	RACOOWFAAAA
DEODORIZING FILTER	RACOODFAAAA



36-INCH REFRIGERATOR COLUMN, RIGHT-HINGE PANEL-READY



PRODUCT FEATURES

- → Full height door with true flush cabinet integration without exposed venting grille
- → SteelCool™ Stainless Steel Interior illuminated by 3DLighting™
- → Push-To-Open[™] Door Assist opens the door upon a slight push for a luxuriously convenient experience
- Internal Water Dispenser for easy access to clean, filtered water
- → iQ RemoteView[™] Cameras (Wi-Fi) enables users to check what's in your fridge from your phone


TEMPERATURE RANGES	
REFRIGERATOR	34°F (1°C) TO 44°F (7°C)
REFRIGERATOR - POWER COOL	34°F (1°C)
FRESHZONE™ DRAWER	37°F (3°C) / 33°F (-1°C)/29°F (-1°C)
DIMENSIONS & WEIGHT	
APPLIANCE DIMENSIONS (H X W X D) (IN.)	83 3/8" X 35 3/4" X 23 13/16"
REQUIRED CUTOUT SIZE (H X W X D) (IN.)	84" X 36" X 25"
NET WEIGHT (LBS)	567

GENERAL PROPERTIES	
PANEL READY	YES
DOOR SWING	RIGHT
PUSH-TO-OPEN™ DOOR ASSIST	YES
INTERNAL WATER DISPENSER	YES
IQ REMOTEVIEW™ CAMERA	YES (2 EA)
DEODORIZING FILTER	YES
LIGHTING	3DLIGHTING™
INTERIOR MATERIAL	STEELCOOL™ STAINLESS STEEL INTERIOR
FULL WIDTH SHELVES	4 EA
SHELF MATERIAL	TEMPERED GLASS SHELVES W/METAL TRIM
FULL EXTENSION DRAWERS AT 90° DOOR OPENING ANGLE	YES
FRESHZONE™ DRAWER	YES - CHEESE (37°F) / COLD DRINKS (33°F) / MEAT (29°F)
CRISPER DRAWERS	2 EA
DOOR BINS	4 EA
DOOR OPEN ALARM	YES
SPECIAL MODES	SABBATH MODE
CAPACITY	ı
TOTAL UNIT GROSS CAPACITY (CU.FT.) - AHAM	21.6 CU. FT.
REFRIGERATOR GROSS CAPACITY (CU.FT.)	21.6 CU. FT.
PERFORMANCE	
DEDICATED EVAPORATOR & COMPRESSOR SYSTEM	YES
POWER COOL	YES
PRECISE COOLING	YES
EFFICIENCY	
ENERGY STAR QUALIFIED	
	YES
ANNUAL ENERGY CONSUMPTION	YES 290 KWH/YEAR
ANNUAL ENERGY CONSUMPTION TECHNICAL DETAILS	
TECHNICAL DETAILS	290 KWH/YEAR
TECHNICAL DETAILS CURRENT (A)	290 KWH/YEAR
TECHNICAL DETAILS CURRENT (A) VOLTS (V)	290 KWH/YEAR 3 115
TECHNICAL DETAILS CURRENT (A) VOLTS (V) FREQUENCY (HZ)	290 KWH/YEAR 3 115 60
TECHNICAL DETAILS CURRENT (A) VOLTS (V) FREQUENCY (HZ) POWER CORD LENGTH (IN.)	290 KWH/YEAR 3 115 60 78 3/4"
TECHNICAL DETAILS CURRENT (A) VOLTS (V) FREQUENCY (HZ) POWER CORD LENGTH (IN.) PLUG TYPE	290 KWH/YEAR 3 115 60 78 3/4"
TECHNICAL DETAILS CURRENT (A) VOLTS (V) FREQUENCY (HZ) POWER CORD LENGTH (IN.) PLUG TYPE WARRANTY LIMITED, ENTIRE APPLIANCE, PARTS AND LABOR ON ANY PART OF THE	290 KWH/YEAR 3 115 60 78 3/4" 120 V, 3 PRONG
TECHNICAL DETAILS CURRENT (A) VOLTS (V) FREQUENCY (HZ) POWER CORD LENGTH (IN.) PLUG TYPE WARRANTY LIMITED, ENTIRE APPLIANCE, PARTS AND LABOR ON ANY PART OF THE REFRIGERATOR LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS	290 KWH/YEAR 3 115 60 78 3/4" 120 V, 3 PRONG




36-INCH REFRIGERATOR COLUMN, RIGHT-HINGE PANEL-READY


APPLIANCE DIMENSIONS	
A (TOTAL WIDTH INCL. PANELS)	35 3/4" (908 MM)
B (TOTAL DEPTH WITH 3/4" PANEL)	25" (635 MM)
C (HEIGHT)	83 3/8" (2118MM)
D	35 5/8" (905 MM)
Е	62 7/8" (1597 MM)
F	20 9/16" (496 MM)
G	61 5/16" (1556 MM)



CUSTOM PANEL DIMENSIONS	
A-1 (WIDTH)	35 3/4" (908MM)
A-2 (HEIGHT)	79 7/8" (2,029MM)
A-3 (DEPTH)	3/4" (19MM)
MAX WEIGHT	66.0 LBS. (30KG)



INSTALL	ATION CUTOUT DIMENSIONS
A (WIDTH)	36" (914MM)
B (DEPTH)	25" (635MM)
C (HEIGHT)	84" (2,134MM)
A'	9" (228MM)
B'	26" (660MM)
C'	80" (2,032MM)

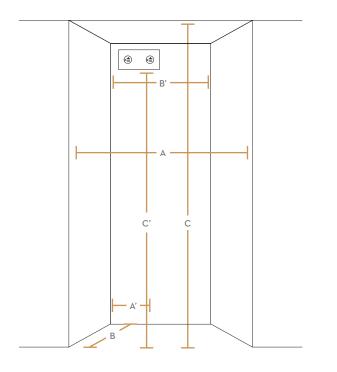

ACCESSORIES	
GRAPHITE STAINLESS STEEL - 36" PANEL (RIGHT HINGE)	RAC36DPRHMS
GRAPHITE STAINLESS STEEL - 36" KICK PLATE	RAC36TKBBMS
GRAPHITE STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAAMS
SILVER STAINLESS STEEL - 36" PANEL (RIGHT HINGE)	RAC36DPRHSR
SILVER STAINLESS STEEL - 36" KICK PLATE	RAC36TKBBSR
SILVER STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAASR
SILVER STAINLESS STEEL - DACOR PRO HANDLE	RACOOPHAASR
PAIR INSTALLATION KIT	RACOOCPAAAA
WATER FILTER	RACOOWFAAAA
DEODORIZING FILTER	RACOODFAAAA