

30-INCH REFRIGERATOR COLUMN, LEFT-HINGE PANEL-READY

DRR30980LAP





- → Full height door with true flush cabinet integration without exposed venting grille
- → SteelCool™ Stainless Steel Interior illuminated by 3DLighting™
- → Push-To-Open[™] Door Assist opens the door upon a slight push for a luxuriously convenient experience
- Internal Water Dispenser for easy access to clean, filtered water
- → iQ RemoteView[™] Cameras (Wi-Fi) enables users to check what's in your fridge from your phone


TEMPERATURE RANGES		
REFRIGERATOR	34°F (1°C) TO 44°F (7°C)	
REFRIGERATOR - POWER COOL	34°F (1°C)	
FRESHZONE™ DRAWER	37°F (3°C) / 33°F (-1°C)/29°F (-1°C)	
DIMENSIONS & WEIGHT		
APPLIANCE DIMENSIONS (H X W X D) (IN.)	83 3/8" X 29 5/8" X 23 13/16"	
REQUIRED CUTOUT SIZE (H X W X D) (IN.)	84" X 30" X 25"	
NET WEIGHT (LBS)	472	

GENERAL PROPERTIES	
PANEL READY	YES
DOOR SWING	LEFT
PUSH-TO-OPEN™ DOOR ASSIST	YES
INTERNAL WATER DISPENSER	YES
IQ REMOTEVIEW™ CAMERA	YES (2 EA)
DEODORIZING FILTER	YES
LIGHTING	3DLIGHTING™
INTERIOR MATERIAL	STEELCOOL™ STAINLESS STEEL INTERIOR
FULL WIDTH SHELVES	4 EA
SHELF MATERIAL	TEMPERED, METAL TRIM, SPILL-PROOF
FULL EXTENSION DRAWERS AT 90° DOOR OPENING ANGLE	YES
FRESHZONE™ DRAWER	YES - CHEESE (37°F) / COLD DRINKS (33°F) / MEAT (29°F)
CRISPER DRAWERS	2 EA
DOOR BINS	4 EA
DOOR OPEN ALARM	YES
SPECIAL MODES	SABBATH MODE
CAPACITY	
TOTAL UNIT GROSS CAPACITY (CU.FT.) - AHAM	17.8 CU. FT.
REFRIGERATOR GROSS CAPACITY (CU.FT.)	17.8 CU. FT.
PERFORMANCE	
DEDICATED EVAPORATOR & COMPRESSOR SYSTEM	YES
POWER COOL	YES
PRECISE COOLING	\/=0
	YES
EFFICIENCY	YES
EFFICIENCY ENERGY STAR QUALIFIED	YES
ENERGY STAR QUALIFIED	YES
ENERGY STAR QUALIFIED ANNUAL ENERGY CONSUMPTION	YES
ENERGY STAR QUALIFIED ANNUAL ENERGY CONSUMPTION TECHNICAL DETAILS	YES 280 KWH/YEAR
ENERGY STAR QUALIFIED ANNUAL ENERGY CONSUMPTION TECHNICAL DETAILS CURRENT (A)	YES 280 KWH/YEAR 3
ENERGY STAR QUALIFIED ANNUAL ENERGY CONSUMPTION TECHNICAL DETAILS CURRENT (A) VOLTS (V)	YES 280 KWH/YEAR 3 115
ENERGY STAR QUALIFIED ANNUAL ENERGY CONSUMPTION TECHNICAL DETAILS CURRENT (A) VOLTS (V) FREQUENCY (HZ) POWER CORD LENGTH (IN.) PLUG TYPE	YES 280 KWH/YEAR 3 115 60
ENERGY STAR QUALIFIED ANNUAL ENERGY CONSUMPTION TECHNICAL DETAILS CURRENT (A) VOLTS (V) FREQUENCY (HZ) POWER CORD LENGTH (IN.)	YES 280 KWH/YEAR 3 115 60 78 3/4"
ENERGY STAR QUALIFIED ANNUAL ENERGY CONSUMPTION TECHNICAL DETAILS CURRENT (A) VOLTS (V) FREQUENCY (HZ) POWER CORD LENGTH (IN.) PLUG TYPE	YES 280 KWH/YEAR 3 115 60 78 3/4"
ENERGY STAR QUALIFIED ANNUAL ENERGY CONSUMPTION TECHNICAL DETAILS CURRENT (A) VOLTS (V) FREQUENCY (HZ) POWER CORD LENGTH (IN.) PLUG TYPE WARRANTY LIMITED, ENTIRE APPLIANCE, PARTS AND LABOR ON ANY PART OF THE	YES 280 KWH/YEAR 3 115 60 78 3/4" 120 V, 3 PRONG
ENERGY STAR QUALIFIED ANNUAL ENERGY CONSUMPTION TECHNICAL DETAILS CURRENT (A) VOLTS (V) FREQUENCY (HZ) POWER CORD LENGTH (IN.) PLUG TYPE WARRANTY LIMITED, ENTIRE APPLIANCE, PARTS AND LABOR ON ANY PART OF THE REFRIGERATOR LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS	YES 280 KWH/YEAR 3 115 60 78 3/4" 120 V, 3 PRONG
ENERGY STAR QUALIFIED ANNUAL ENERGY CONSUMPTION TECHNICAL DETAILS CURRENT (A) VOLTS (V) FREQUENCY (HZ) POWER CORD LENGTH (IN.) PLUG TYPE WARRANTY LIMITED, ENTIRE APPLIANCE, PARTS AND LABOR ON ANY PART OF THE REFRIGERATOR LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS AND LABOR LIMITED WARRANTY FOR SEALED	YES 280 KWH/YEAR 3 115 60 78 3/4" 120 V, 3 PRONG 2 YEAR 3RD TO 6TH YEAR




30-INCH REFRIGERATOR COLUMN, LEFT-HINGE PANEL-READY


APPLIANCE DIMENSIONS	
A (TOTAL WIDTH INCL. PANELS)	29 3/4" (756 MM)
B (TOTAL DEPTH WITH 3/4" PANEL)	25" (635 MM)
C (HEIGHT)	83 3/8" (2118MM)
D	29 5/8" (752 MM)
Е	56 11/16" (1440 MM)
F	16 9/16" (421 MM)
G	55 5/16" (1404 MM)



CUSTOM PANEL DIMENSIONS		
A-1 (WIDTH)	29 3/4" (756MM)	
A-2 (HEIGHT)	79 7/8" (2,029MM)	
A-3 (DEPTH)	3/4" (19MM)	
MAX WEIGHT	88.0 LBS. (40KG)	



INSTALL	ATION CUTOUT DIMENSIONS
A (WIDTH)	30" (762MM)
B (DEPTH)	25" (635MM)
C (HEIGHT)	84" (2,134MM)
A'	6" (152MM)
B'	20" (508MM)
C'	80" (2,032MM)

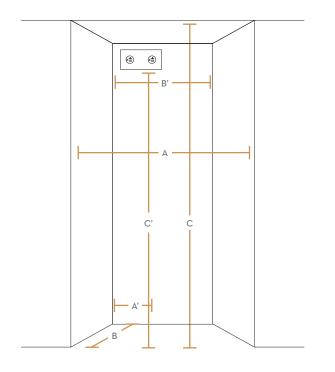

ACCESSORIES	
GRAPHITE STAINLESS STEEL - 30" PANEL (LEFT HINGE)	RAC30DPLHMS
GRAPHITE STAINLESS STEEL - 30" KICK PLATE	RAC30TKBBMS
GRAPHITE STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAAMS
SILVER STAINLESS STEEL - 30" PANEL (LEFT HINGE)	RAC30DPLHSR
SILVER STAINLESS STEEL - 30" KICK PLATE	RAC30TKBBSR
SILVER STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAASR
SILVER STAINLESS STEEL - DACOR PRO HANDLE	RACOOPHAASR
PAIR INSTALLATION KIT	RACOOCPAAAA
WATER FILTER	RACOOWFAAAA
DEODORIZING FILTER	RACOODFAAAA



30-INCH REFRIGERATOR COLUMN, RIGHT-HINGE PANEL-READY

DRR30980RAP







- → Full height door with true flush cabinet integration without exposed venting grille
- → SteelCool™ Stainless Steel Interior illuminated by 3DLighting™
- → Push-To-Open[™] Door Assist opens the door upon a slight push for a luxuriously convenient experience
- Internal Water Dispenser for easy access to clean, filtered water
- → iQ RemoteView[™] Cameras (Wi-Fi) enables users to check what's in your fridge from your phone


TEMPERATURE RANGES	
REFRIGERATOR	34°F (1°C) TO 44°F (7°C)
REFRIGERATOR - POWER COOL	34°F (1°C)
FRESHZONE™ DRAWER	37°F (3°C) / 33°F (-1°C)/29°F (-1°C)
DIMENSIONS & WEIGHT	
APPLIANCE DIMENSIONS (H X W X D) (IN.)	83 3/8" X 29 5/8" X 23 13/16"
REQUIRED CUTOUT SIZE (H X W X D) (IN.)	84" X 30" X 25"
NET WEIGHT (LBS)	472

GENERAL PROPERTIES	
PANEL READY	YES
DOOR SWING	RIGHT
PUSH-TO-OPEN™ DOOR ASSIST	YES
INTERNAL WATER DISPENSER	YES
IQ REMOTEVIEW™ CAMERA	YES (2 EA)
DEODORIZING FILTER	YES
LIGHTING	3DLIGHTING™ STEELCOOL™ STAINLESS STEEL
INTERIOR MATERIAL	INTERIOR
FULL WIDTH SHELVES	4 EA
SHELF MATERIAL	TEMPERED, METAL TRIM, SPILL-PROOF
FULL EXTENSION DRAWERS AT 90° DOOR OPENING ANGLE	YES
FRESHZONE™ DRAWER	YES - CHEESE (37°F) / COLD DRINKS (33°F) / MEAT (29°F)
CRISPER DRAWERS	2 EA
DOOR BINS	4 EA
DOOR OPEN ALARM	YES
SPECIAL MODES	SABBATH MODE
CAPACITY	
TOTAL UNIT GROSS CAPACITY (CU.FT.) - AHAM	17.8 CU. FT.
REFRIGERATOR GROSS CAPACITY (CU.FT.)	17.8 CU. FT.
PERFORMANCE	
DEDICATED EVAPORATOR & COMPRESSOR SYSTEM	YES
POWER COOL	YES
PRECISE COOLING	YES
EFFICIENCY	
ENERGY STAR QUALIFIED	YES
ANNUAL ENERGY CONSUMPTION	280 KWH/YEAR
TECHNICAL DETAILS	
CURRENT (A)	3
VOLTS (V)	115
FREQUENCY (HZ)	60
POWER CORD LENGTH (IN.)	78 3/4"
PLUG TYPE	120 V, 3 PRONG
WARRANTY	
LIMITED, ENTIRE APPLIANCE, PARTS AND LABOR ON ANY PART OF THE REFRIGERATOR	2 YEAR
LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS AND LABOR	3RD TO 6TH YEAR
LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS ONLY	7TH TO 12TH YEAR
LIMITED WARRANTY	13TH TO 15TH YEAR




30-INCH REFRIGERATOR COLUMN, RIGHT-HINGE PANEL-READY


APPLIANCE DIMENSIONS	
A (TOTAL WIDTH INCL. PANELS)	29 3/4" (756 MM)
B (TOTAL DEPTH WITH 3/4" PANEL)	25" (635 MM)
C (HEIGHT)	83 3/8" (2118MM)
D	29 5/8" (752 MM)
E	56 11/16" (1440 MM)
F	16 9/16" (421 MM)
G	55 5/16" (1404 MM)



CUSTOM PANEL DIMENSIONS		
A-1 (WIDTH)	29 3/4" (756MM)	
A-2 (HEIGHT)	79 7/8" (2,029MM)	
A-3 (DEPTH)	3/4" (19MM)	
MAX WEIGHT	88.0 LBS. (40KG)	



INSTALL A	ATION CUTOUT DIMENSIONS
A (WIDTH)	30" (762MM)
B (DEPTH)	25" (635MM)
C (HEIGHT)	84" (2,134MM)
A'	6" (152MM)
B'	20" (508MM)
C'	80" (2,032MM)

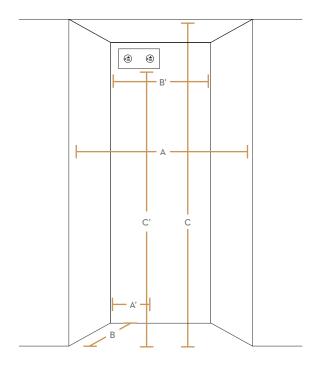

ACCESSORIES	
GRAPHITE STAINLESS STEEL - 30" PANEL (RIGHT HINGE)	RAC30DPRHMS
GRAPHITE STAINLESS STEEL - 30" KICK PLATE	RAC30TKBBMS
GRAPHITE STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAAMS
SILVER STAINLESS STEEL - 30" PANEL (RIGHT HINGE)	RAC30DPRHSR
SILVER STAINLESS STEEL - 30" KICK PLATE	RAC30TKBBSR
SILVER STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAASR
SILVER STAINLESS STEEL - DACOR PRO HANDLE	RACOOPHAASR
PAIR INSTALLATION KIT	RACOOCPAAAA
WATER FILTER	RACOOWFAAAA
DEODORIZING FILTER	RACOODFAAAA



24-INCH FREEZER COLUMN, LEFT-HINGE PANEL-READY

DRZ24980LAP







- → Full height door with true flush cabinet integration without exposed venting grille
- → SteelCool™ Stainless Steel Interior illuminated by 3DLighting™
- → Push-To-OpenTM Door Assist opens the door upon a slight push for a luxuriously convenient experience
- → Dual Icemaker with Standard and Cocktail Ice™
- → Best-in class food preservation with dedicated evaporator/ compressor and Precise Cooling Technology


TEMPERATURE RANGES	
FREEZER	5°F (-15°C) TO -8°F (-23°C)
FREEZER - POWER FREEZE	-8°F (-23°C)
DIMENSIONS & WEIGHT	
APPLIANCE DIMENSIONS (H X W X D) (IN.)	83 3/8" X 23 5/8" X 23 13/16"
REQUIRED CUTOUT SIZE (H X W X D) (IN.)	84" X 24" X 25"
NET WEIGHT (LBS)	386

GENERAL PROPERTIES	
PANEL READY	YES
DOOR SWING	LEFT
PUSH-TO-OPEN™ DOOR ASSIST	YES
ICEMAKER	DUAL ICEMAKER FOR STANDARD AND COCKTAIL ICE™
LIGHTING	3DLIGHTING™
INTERIOR MATERIAL	STEELCOOL™ STAINLESS STEEL INTERIOR
FULL WIDTH SHELVES	3 EA
SHELF MATERIAL	TEMPERED, METAL TRIM, SPILL-PROOF
FULL EXTENSION DRAWERS AT 90° DOOR OPENING ANGLE	YES
HIDDEN COMPARTMENT WITH FLIP-UP COVER	1EA
FREEZER DRAWER	2 EA
DOOR BINS	4 EA
DOOR OPEN ALARM	YES
SPECIAL MODES	SABBATH MODE
CAPACITY	
TOTAL UNIT GROSS CAPACITY (CU.FT.) - AHAM	13.6 CU. FT.
REFRIGERATOR GROSS CAPACITY (CU.FT.)	13.6 CU. FT.
PERFORMANCE	
DEDICATED EVAPORATOR & COMPRESSOR SYSTEM	YES
POWER FREEZE	YES
DEFROST PROCESS	FROST-FREE
PRECISE COOLING	YES
EFFICIENCY	
ENERGY STAR QUALIFIED	YES
ANNUAL ENERGY CONSUMPTION	500 KWH/YEAR
TECHNICAL DETAILS	
CURRENT (A)	3
VOLTS (V)	115
FREQUENCY (HZ)	60
POWER CORD LENGTH (IN.)	78 3/4"
PLUG TYPE	120 V, 3 PRONG
WARRANTY	
LIMITED, ENTIRE APPLIANCE, PARTS AND LABOR ON ANY PART OF THE REFRIGERATOR	2 YEAR
LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS AND LABOR	3RD TO 6TH YEAR
LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS ONLY	7TH TO 12TH YEAR
LIMITED WARRANTY FOR COMPRESSOR; PARTS ONLY	13TH TO 15TH YEAR




24-INCH FREEZER COLUMN, RIGHT-HINGE PANEL-READY


APPLIANCE DIMENSIONS	
A (TOTAL WIDTH INCL. PANELS)	23 3/4" (603 MM)
B (TOTAL DEPTH WITH 3/4" PANEL)	25" (635 MM)
C (HEIGHT)	83 3/8" (2118MM)
D	23 5/8" (600 MM)
Е	50 3/4" (1289 MM)
F	13 11/16" (348 MM)
G	49 11/16" (1261 MM)



CUSTOM PANEL DIMENSIONS		
23 3/4" (603MM)		
79 7/8" (2,029MM)		
3/4" (19MM)		
110.0 LBS. (50KG)		



INSTALL A	ATION CUTOUT DIMENSIONS
A (WIDTH)	24" (610MM)
B (DEPTH)	25" (635MM)
C (HEIGHT)	84" (2,134MM)
A'	5 1/2" (140MM)
B'	14" (356MM)
C'	80" (2,032MM)

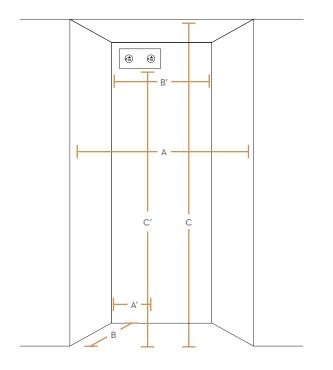

ACCESSORIES	
GRAPHITE STAINLESS STEEL - 24" PANEL (LEFT HINGE)	RAC24DPLHMS
GRAPHITE STAINLESS STEEL - 24" KICK PLATE	RAC24TKBBMS
GRAPHITE STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAAMS
SILVER STAINLESS STEEL - 24" PANEL (LEFT HINGE)	RAC24DPLHSR
SILVER STAINLESS STEEL - 24" KICK PLATE	RAC24TKBBSR
SILVER STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAASR
SILVER STAINLESS STEEL - DACOR PRO HANDLE	RACOOPHAASR
PAIR INSTALLATION KIT	RACOOCPAAAA
WATER FILTER	RACOOWFAAAA
DEODORIZING FILTER	RACOODFAAAA



24-INCH FREEZER COLUMN, RIGHT-HINGE PANEL-READY

DRZ24980RAP





- > Full height door with true flush cabinet integration without exposed venting grille
- → SteelCool™ Stainless Steel Interior illuminated by 3DLighting™
- → Push-To-Open[™] Door Assist opens the door upon a slight push for a luxuriously convenient experience
- → Dual Icemaker with Standard and Cocktail Ice™
- → Best-in class food preservation with dedicated evaporator/ compressor and Precise Cooling Technology


TEMPERATURE RANGES	
FREEZER	5°F (-15°C) TO -8°F (-23°C)
FREEZER - POWER FREEZE	-8°F (-23°C)
DIMENSIONS & WEIGHT	
APPLIANCE DIMENSIONS (H X W X D) (IN.)	83 3/8" X 23 5/8" X 23 13/16"
REQUIRED CUTOUT SIZE (H X W X D) (IN.)	84" X 24" X 25"
NET WEIGHT (LBS)	386

GENERAL PROPERTIES	
PANEL READY	YES
DOOR SWING	RIGHT
PUSH-TO-OPEN™ DOOR ASSIST	YES
ICEMAKER	DUAL ICEMAKER FOR STANDARD AND COCKTAIL ICE™
LIGHTING	3DLIGHTING™
INTERIOR MATERIAL	STEELCOOL™ STAINLESS STEEL INTERIOR
FULL WIDTH SHELVES	3 EA
SHELF MATERIAL	TEMPERED, METAL TRIM, SPILL-PROOF
FULL EXTENSION DRAWERS AT 90° DOOR OPENING ANGLE	YES
HIDDEN COMPARTMENT WITH FLIP-UP COVER	1 EA
FREEZER DRAWER	2 EA
DOOR BINS	4 EA
DOOR OPEN ALARM	YES
SPECIAL MODES	SABBATH MODE
CAPACITY	
TOTAL UNIT GROSS CAPACITY (CU.FT.) - AHAM	13.6 CU. FT.
REFRIGERATOR GROSS CAPACITY (CU.FT.)	13.6 CU. FT.
PERFORMANCE	
DEDICATED EVAPORATOR & COMPRESSOR SYSTEM	YES
POWER FREEZE	YES
DEFROST PROCESS	FROST-FREE
PRECISE COOLING	YES
EFFICIENCY	
ENERGY STAR QUALIFIED	YES
ANNUAL ENERGY CONSUMPTION	500 KWH/YEAR
TECHNICAL DETAILS	
CURRENT (A)	3
VOLTS (V)	115
FREQUENCY (HZ)	60
POWER CORD LENGTH (IN.)	78 3/4"
PLUG TYPE	120 V, 3 PRONG
WARRANTY	
LIMITED, ENTIRE APPLIANCE, PARTS AND LABOR ON ANY PART OF THE REFRIGERATOR	2 YEAR
LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS AND LABOR	3RD TO 6TH YEAR
LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS ONLY	7TH TO 12TH YEAR
LIMITED WARRANTY FOR COMPRESSOR; PARTS ONLY	13TH TO 15TH YEAR




24-INCH FREEZER COLUMN, RIGHT-HINGE PANEL-READY


APPLIANCE DIMENSIONS	
A (TOTAL WIDTH INCL. PANELS)	23 3/4" (603 MM)
B (TOTAL DEPTH WITH 3/4" PANEL)	25" (635 MM)
C (HEIGHT)	83 3/8" (2118MM)
D	23 5/8" (600 MM)
Е	50 3/4" (1289 MM)
F	13 11/16" (348 MM)
G	49 11/16" (1261 MM)



3 3/4" (603MM)
9 7/8" (2,029MM)
/4" (19MM)
0.0 LBS. (50KG)
/



INSTALL A	ATION CUTOUT DIMENSIONS
A (WIDTH)	24" (610MM)
B (DEPTH)	25" (635MM)
C (HEIGHT)	84" (2,134MM)
A'	5 1/2" (140MM)
B'	14" (356MM)
C'	80" (2,032MM)

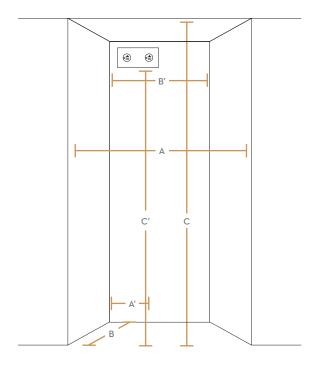

ACCESSORIES	
GRAPHITE STAINLESS STEEL - 24" PANEL (RIGHT HINGE)	RAC24DPRHMS
GRAPHITE STAINLESS STEEL - 24" KICK PLATE	RAC24TKBBMS
GRAPHITE STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAAMS
SILVER STAINLESS STEEL - 24" PANEL (RIGHT HINGE)	RAC24DPRHSR
SILVER STAINLESS STEEL - 24" KICK PLATE	RAC24TKBBSR
SILVER STAINLESS STEEL - MODERNIST HANDLE	RACOOMHAASR
SILVER STAINLESS STEEL - DACOR PRO HANDLE	RACOOPHAASR
PAIR INSTALLATION KIT	RACOOCPAAAA
WATER FILTER	RACOOWFAAAA
DEODORIZING FILTER	RACOODFAAAA