DRR3090LAP

30-INCH REFRIGERATOR COLUMN, LEFT-HINGE MODERNIST, PANEL-READY







- Full height door with true flush cabinet integration without exposed venting grille
 • SteelCool™ Stainless Steel Interior Illuminated by 3DLighting™
- Push-To-Open™ Door Assist opens the door upon a slight push for a luxuriously convenient experience
 Internal Water Dispenser for easy access to clean, filtered water
- iQ RemoteView™ Cameras (Wi-Fi) enables users to check what's in your fridge from your phone

TEMPERATURE RANGES	
Refrigerator	34°F (1°C) to 44°F (7°C)
Refrigerator - Power Cool	34°F (1°C)
FreshZone™ Drawer	37°F (3°C) / 33°F (1°C) /29°F (-1°C)


ACCESSORIES (OPTIONAL)	
Graphite Stainless Steel - 30" Panel (Left Hinge)	RAC30DPLHMS
Graphite Stainless Steel - 30" Kick Plate	RAC30TKBBMS
Graphite Stainless Steel - Modernist Handle	RAC00MHAAMS
Silver Stainless Steel - 30" Panel (Left Hinge)	RAC30DPLHSR
Silver Stainless Steel - 30" Kick Plate	RAC30TKBBSR
Silver Stainless Steel - Modernist Handle	RAC00MHAASR
Silver Stainless Steel - Dacor Pro Handle	RAC00PHAASR
Pair Installation Kit	RAC00CPAAAA
Water Filter	RAC00WFAAAA
Deodorizing Filter	RAC00DFAAAA

GENERAL PROPERTIES	
Panel Ready	Yes
Door Swing	Left
Push-To-Open™ Door Assist	Yes
Internal Water Dispenser	Yes
iQ RemoteView™ Camera	Yes (2 ea)
Deodorizing Filter	Yes
Lighting	3DLighting™
Interior Material	SteelCool™ Stainless Steel Interior
Full Width Shelves	4 ea
Shelf Material	Tempered, Metal Trim, Spill- Proof
Full Extension Drawers at 90° Door Opening Angle	Yes
FreshZone™ Drawer	Yes - Cheese (37°F) / Cold Drinks (33°F) / Meat (29°F)
Humidity Control Drawer	2 ea
Door Bins	4 ea
Door Open Alarm	Yes
Special Modes	Sabbath Mode
CAPACITY	
Total Unit Gross Capacity (cu. ft.) - AHAM	17.8 cu. ft.
Refrigerator Gross Capacity (cu. ft.)	17.8 cu. ft.
PERFORMANCE	
Dedicated Evaportator & Compressor System	Yes
	Yes Yes
sor System	
sor System Power Cool	Yes Minimized temperature fluc-
sor System Power Cool Precise Cooling	Yes Minimized temperature fluc-
sor System Power Cool Precise Cooling TECHNICAL DETAILS	Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*)
sor System Power Cool Precise Cooling TECHNICAL DETAILS Current (A)	Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*) 3
sor System Power Cool Precise Cooling TECHNICAL DETAILS Current (A) Volts (V)	Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*) 3 115
sor System Power Cool Precise Cooling TECHNICAL DETAILS Current (A) Volts (V) Frequency (Hz)	Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*) 3 115 60
sor System Power Cool Precise Cooling TECHNICAL DETAILS Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.)	Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*) 3 115 60 78.34"
sor System Power Cool Precise Cooling TECHNICAL DETAILS Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type	Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*) 3 115 60 78.34"
sor System Power Cool Precise Cooling TECHNICAL DETAILS Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT	Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*) 3 115 60 78.34" 120V, 3 Prong
sor System Power Cool Precise Cooling TECHNICAL DETAILS Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance dimensions (H x W x D) (in.)	Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*) 3 115 60 78.34" 120V, 3 Prong 83 3/8" x 29 5/8" x 23 13/16"
sor System Power Cool Precise Cooling TECHNICAL DETAILS Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.)	Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*) 3 115 60 78.34" 120V, 3 Prong 83 3/8" x 29 5/8" x 23 13/16" 84" x 30" x 25"
sor System Power Cool Precise Cooling TECHNICAL DETAILS Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net Weight (lbs)	Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*) 3 115 60 78.34" 120V, 3 Prong 83 3/8" x 29 5/8" x 23 13/16" 84" x 30" x 25"
sor System Power Cool Precise Cooling TECHNICAL DETAILS Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net Weight (lbs) EFFICIENCY	Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*) 3 115 60 78.34" 120V, 3 Prong 83 3/8" x 29 5/8" x 23 13/16" 84" x 30" x 25" 472
sor System Power Cool Precise Cooling TECHNICAL DETAILS Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net Weight (lbs) EFFICIENCY ENERGY STAR Qualified	Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*) 3 115 60 78.34" 120V, 3 Prong 83 3/8" x 29 5/8" x 23 13/16" 84" x 30" x 25" 472 Yes
sor System Power Cool Precise Cooling TECHNICAL DETAILS Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net Weight (lbs) EFFICIENCY ENERGY STAR Qualified Annual Energy Consumption	Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*) 3 115 60 78.34" 120V, 3 Prong 83 3/8" x 29 5/8" x 23 13/16" 84" x 30" x 25" 472 Yes
sor System Power Cool Precise Cooling TECHNICAL DETAILS Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net Weight (lbs) EFFICIENCY ENERGY STAR Qualified Annual Energy Consumption WARRANTY Limited, Entire Appliance, Parts and Labor on Any Part of the Refriger-	Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*) 3 115 60 78.34" 120V, 3 Prong 83 3/8" x 29 5/8" x 23 13/16" 84" x 30" x 25" 472 Yes 280 kWy/year

DRR3090LAP


30-INCH REFRIGERATOR COLUMN, LEFT-HINGE MODERNIST, PANEL-READY



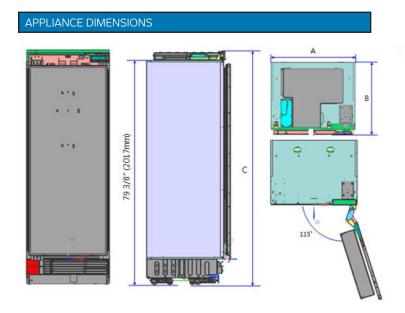


	30"
A (Width)	29 5/8" (752mm)
B (Depth)	23 13/16" (605mm)
C (Height)	83 3/8"" (2118mm)

INSTALLATION CUTOUT DIMENSIONS

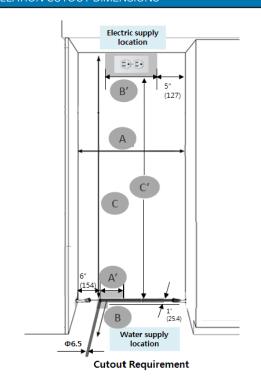

	30"
A (Width)	30" (762mm)
B (Depth)	25" (635mm)
C (Height)	84" (2134mm)
A'	6" (152mm)
B'	20" (508mm)
C'	80" (2032mm)



	30″
A-1 (Width)	29 3/4" (756mm)
A-2 (Height)	79 7/8" (2029mm)
A-3 (Depth)	3/4" (19mm)
Max Weight	88.0 lbs. (40kg)

DRR3090RAP

30-INCH REFRIGERATOR COLUMN, RIGHT-HINGE MODERNIST, PANEL-READY







- Full height door with true flush cabinet integration without exposed venting grille
 • SteelCool™ Stainless Steel Interior Illuminated by 3DLighting™
- Push-To-Open™ Door Assist opens the door upon a slight push for a luxuriously convenient experience
 • Internal Water Dispenser for easy access to clean, filtered water
- iQ RemoteView™ Cameras (Wi-Fi) enables users to check what's in your fridge from your phone

TEMPERATURE RANGES	
Refrigerator	34°F (1°C) to 44°F (7°C)
Refrigerator - Power Cool	34°F (1°C)
FreshZone™ Drawer	37°F (3°C) / 33°F (1°C) /29°F (-1°C)


ACCESSORIES (OPTIONAL)	
Graphite Stainless Steel - 30" Panel (Right Hinge)	RAC30DPRHMS
Graphite Stainless Steel - 30" Kick Plate	RAC30TKBBMS
Graphite Stainless Steel - Modernist Handle	RAC00MHAAMS
Silver Stainless Steel - 30" Panel (Right Hinge)	RAC30DPRHSR
Silver Stainless Steel - 30" Kick Plate	RAC30TKBBSR
Silver Stainless Steel - Modernist Handle	RAC00MHAASR
Silver Stainless Steel - Dacor Pro Handle	RAC00PHAASR
Pair Installation Kit	RAC00CPAAAA
Water Filter	RAC00WFAAAA
Deodorizing Filter	RAC00DFAAAA

GENERAL PROPERTIES	
Panel Ready	Yes
Door Swing	Right
Push-To-Open™ Door Assist	Yes
Internal Water Dispenser	Yes
iQ RemoteView™ Camera	Yes (2 ea)
Deodorizing Filter	Yes
Lighting	3DLighting™
Interior Material	SteelCool™ Stainless Steel Interior
Full Width Shelves	4 ea
Shelf Material	Tempered, Metal Trim, Spill- Proof
Full Extension Drawers at 90° Door Opening Angle	Yes
FreshZone™ Drawer	Yes - Cheese (37°F) / Cold Drinks (33°F) / Meat (29°F)
Humidity Control Drawer	2 ea
Door Bins	4 ea
Door Open Alarm	Yes
Special Modes	Sabbath Mode
CAPACITY	
Total Unit Gross Capacity (cu. ft.) - AHAM	17.8 cu. ft.
Refrigerator Gross Capacity (cu. ft.)	17.8 cu. ft.
PERFORMANCE	
Dedicated Evaportator & Compressor System	Yes
Power Cool	Yes
Precise Cooling	Minimized temperature fluctuation ±0.36°F* (±0.2°C*)
TECHNICAL DETAILS	
Current (A)	3
Volts (V)	115
Frequency (Hz)	60
Power Cord Length (in.)	78.34"
Plug Type	120V, 3 Prong
DIMENSIONS & WEIGHT	
Appliance dimensions (H x W x D) (in.)	83 3/8" x 29 5/8" x 23 13/16"
Required Cutout Size (H x W x D) (in.)	84" x 30" x 25"
Net Weight (lbs)	472
EFFICIENCY	
ENERGY STAR Qualified	Yes
Annual Energy Consumption	280 kWy/year
WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refriger- ator	2 Year
Limited Warranty for Sealed Refrigeration System; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System; Parts Only	7th to 12th Year

DRR3090RAP


30-INCH REFRIGERATOR COLUMN, RIGHT-HINGE MODERNIST, PANEL-READY



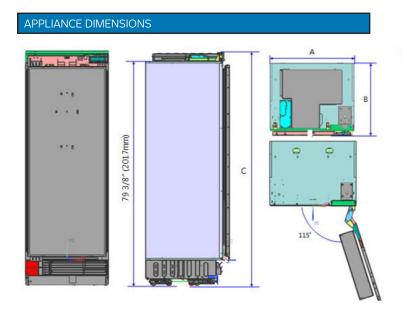


	30"
A (Width)	29 5/8" (752mm)
B (Depth)	23 13/16" (605mm)
C (Height)	83 3/8"" (2118mm)

INSTALLATION CUTOUT DIMENSIONS

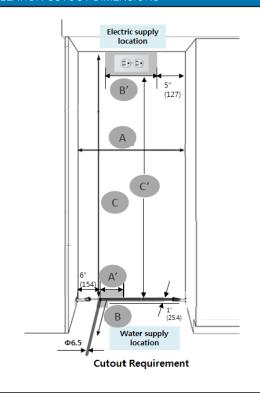

	30"
A (Width)	30" (762mm)
B (Depth)	25" (635mm)
C (Height)	84" (2134mm)
A'	6" (152mm)
B'	20" (508mm)
C'	80" (2032mm)



	30″
A-1 (Width)	29 3/4" (756mm)
A-2 (Height)	79 7/8" (2029mm)
A-3 (Depth)	3/4" (19mm)
Max Weight	88.0 lbs. (40kg)

DRZ18980LAP

18-INCH FREEZER COLUMN, LEFT-HINGE

MODERNIST, PANEL-READY







- Full height door with true flush cabinet integration without exposed venting grille
- SteelCool™ Stainless Steel Interior Illuminated by 3DLighting™
- Push-To-Open™ Door Assist opens the door upon a slight push for a luxuriously convenient experience


TEMPERATURE RANGES	
Freezer	5°F (-15°C) to -8°F (-23°C)
Freezer - Power Freeze	-8°F (-23°C)

ACCESSORIES (OPTIONAL)	
Graphite Stainless Steel - 18" Panel (Left Hinge)	RAC18DPLHMS
Graphite Stainless Steel - 18" Kick Plate	RAC18TKBBMS
Graphite Stainless Steel - Modernist Handle	RAC00MHAAMS
Silver Stainless Steel - 18" Panel (Left Hinge)	RAC18DPLHSR
Silver Stainless Steel - 18" Kick Plate	RAC18TKBBSR
Silver Stainless Steel - Modernist Handle	RAC00MHAASR
Silver Stainless Steel - Dacor Pro Handle	RAC00PHAASR
Pair Installation Kit	RAC00CPAAAA
Water Filter	RAC00WFAAAA
Deodorizing Filter	RAC00DFAAAA

GENERAL PROPERTIES	
Panel Ready	Yes
Door Swing	Left
Push-To-Open™ Door Assist	Yes
Icemaker	Standard Icemaker
Lighting	3DLighting™
Interior Material	SteelCool™ Stainless Steel Interior
Full Width Shelves	3 ea
Shelf Material	Tempered, Metal Trim, Spill- Proof
Full Extension Drawers at 90° Door Opening Angle	Yes
Hidden Box with Flip-up Cover	No
Freezer Drawer	2 ea
Door Bins	4 ea
Door Open Alarm	Yes
Special Modes	Sabbath Mode
CAPACITY	
Total Unit Gross Capacity (cu. ft.) - AHAM	9.4 cu. ft.
Freezer Gross Capacity (cu. ft.)	9.4 cu. ft.
PERFORMANCE	
Dedicated Evaportator & Compressor System	Yes
Power Freeze	Yes
Defrost Process	Frost-Free
Temperature Fluctuation	±0.36°F* (±0.2°C*)
TECHNICAL DETAILS	
Current (A)	3
Volts (V)	115
Frequency (Hz)	60
Power Cord Length (in.)	78 3/4"
Plug Type	120V, 3 Prong
DIMENSIONS	
Appliance dimensions (H x W x D) (in.)	83 3/8" x 17 5/8" x 23 13/16"
Required Cutout Size (H x W x D) (in.)	84" x 18" x 25"
EFFICIENCY	
ENERGY STAR Qualified	Yes
Annual Energy Consumption	465 kWh
WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Freezer	2 Year
Limited Warranty for Sealed Freezer System; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Freezer System; Parts Only	7th to 12th Year


18-INCH FREEZER COLUMN, LEFT-HINGE MODERNIST, PANEL-READY



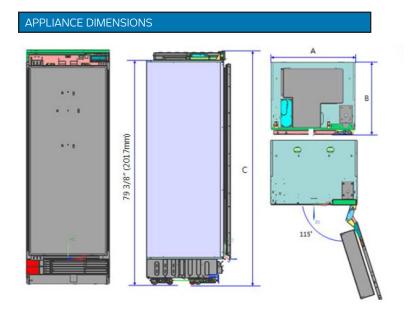


	18"	
A (Width)	17 5/8" (447mm)	
B (Depth)	23 13/16" (605mm)	
C (Height)	83 3/8"" (2118mm)	

INSTALLATION CUTOUT DIMENSIONS

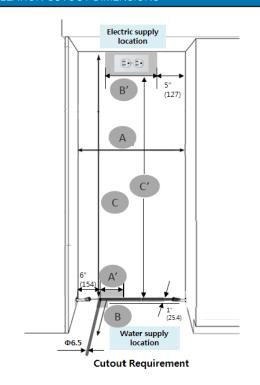

	18"
A (Width)	18" (457mm)
B (Depth)	25" (635mm)
C (Height)	84" (2134mm)
A'	3" (140mm)
B'	8" (356mm)
C'	80" (2032mm)



	18"
A-1 (Width)	17 3/4" (603mm)
A-2 (Height)	79 7/8" (2029mm)
A-3 (Depth)	3/4" (19mm)
Max Weight	132.0 lbs. (60kg)

DRZ18980RAP

18-INCH FREEZER COLUMN, RIGHT-HINGE

MODERNIST, PANEL-READY







- Full height door with true flush cabinet integration without exposed venting grille
- SteelCool™ Stainless Steel Interior Illuminated by 3DLighting™
- Push-To-Open™ Door Assist opens the door upon a slight push for a luxuriously convenient experience

TEMPERATURE RANGES	
Freezer	5°F (-15°C) to -8°F (-23°C)
Freezer - Power Freeze	-8°F (-23°C)


ACCESSORIES (OPTIONAL)	
Graphite Stainless Steel - 18" Panel (Right Hinge)	RAC18DPLHMS
Graphite Stainless Steel - 18" Kick Plate	RAC18TKBBMS
Graphite Stainless Steel - Modernist Handle	RAC00MHAAMS
Silver Stainless Steel - 18" Panel (Right Hinge)	RAC18DPLHSR
Silver Stainless Steel - 18" Kick Plate	RAC18TKBBSR
Silver Stainless Steel - Modernist Handle	RAC00MHAASR
Silver Stainless Steel - Dacor Pro Handle	RAC00PHAASR
Pair Installation Kit	RAC00CPAAAA
Water Filter	RAC00WFAAAA
Deodorizing Filter	RAC00DFAAAA

GENERAL PROPERTIES	
	Yes
Panel Ready	
Door Swing	Right
Push-To-Open™ Door Assist	Yes
Icemaker	Standard Icemaker
Lighting	3DLighting™
Interior Material	SteelCool™ Stainless Steel Interior
Full Width Shelves	3 ea
Shelf Material	Tempered, Metal Trim, Spill- Proof
Full Extension Drawers at 90° Door Opening Angle	Yes
Hidden Box with Flip-up Cover	No
Freezer Drawer	2 ea
Door Bins	4 ea
Door Open Alarm	Yes
Special Modes	Sabbath Mode
CAPACITY	
Total Unit Gross Capacity (cu. ft.) - AHAM	9.4 cu. ft.
Freezer Gross Capacity (cu. ft.)	9.4 cu. ft.
PERFORMANCE	
Dedicated Evaportator & Compressor System	Yes
Power Freeze	Yes
Defrost Process	Frost-Free
Temperature Fluctuation	±0.36°F* (±0.2°C*)
TECHNICAL DETAILS	
Current (A)	3
Volts (V)	115
Frequency (Hz)	60
Power Cord Length (in.)	78 3/4"
Plug Type	120V, 3 Prong
DIMENSIONS	
Appliance dimensions (H x W x D) (in.)	83 3/8" x 17 5/8" x 23 13/16"
Required Cutout Size (H x W x D) (in.)	84" x 18" x 25"
EFFICIENCY	
ENERGY STAR Qualified	Yes
Annual Energy Consumption	465 kWh
WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Freezer	2 Year
Limited Warranty for Sealed Freezer System; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Freezer System; Parts Only	7th to 12th Year

DRZ18980RAP


18-INCH FREEZER COLUMN, RIGHT-HINGE MODERNIST, PANEL-READY



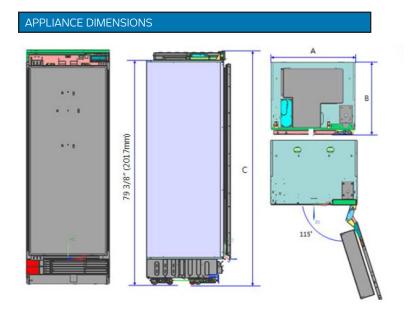


	18"	
A (Width)	17 5/8" (447mm)	
B (Depth)	23 13/16" (605mm)	
C (Height)	83 3/8"" (2118mm)	

INSTALLATION CUTOUT DIMENSIONS

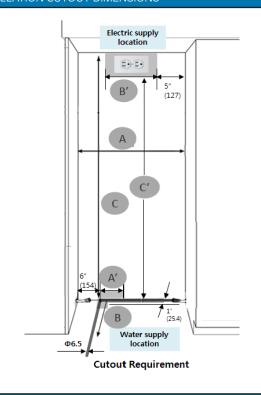

	18"
A (Width)	18" (457mm)
B (Depth)	25" (635mm)
C (Height)	84" (2134mm)
A'	3" (140mm)
B'	8" (356mm)
C'	80" (2032mm)



	18"
A-1 (Width)	17 3/4" (603mm)
A-2 (Height)	79 7/8" (2029mm)
A-3 (Depth)	3/4" (19mm)
Max Weight	132.0 lbs. (60kg)