## DRR3090LAP

## 30-INCH REFRIGERATOR COLUMN, LEFT-HINGE MODERNIST, PANEL-READY







- Full height door with true flush cabinet integration without exposed venting grille
  • SteelCool™ Stainless Steel Interior Illuminated by 3DLighting™
- Push-To-Open™ Door Assist opens the door upon a slight push for a luxuriously convenient experience
  Internal Water Dispenser for easy access to clean, filtered water
- iQ RemoteView™ Cameras (Wi-Fi) enables users to check what's in your fridge from your phone

| TEMPERATURE RANGES        |                                      |
|---------------------------|--------------------------------------|
| Refrigerator              | 34°F (1°C) to 44°F (7°C)             |
| Refrigerator - Power Cool | 34°F (1°C)                           |
| FreshZone™ Drawer         | 37°F (3°C) / 33°F (1°C) /29°F (-1°C) |


| ACCESSORIES (OPTIONAL)                            |             |
|---|-------------|
| Graphite Stainless Steel - 30" Panel (Left Hinge) | RAC30DPLHMS |
| Graphite Stainless Steel - 30" Kick Plate         | RAC30TKBBMS |
| Graphite Stainless Steel - Modernist Handle       | RAC00MHAAMS |
| Silver Stainless Steel - 30" Panel (Left Hinge)   | RAC30DPLHSR |
| Silver Stainless Steel - 30" Kick Plate           | RAC30TKBBSR |
| Silver Stainless Steel - Modernist Handle         | RAC00MHAASR |
| Silver Stainless Steel - Dacor Pro Handle         | RAC00PHAASR |
| Pair Installation Kit                             | RAC00CPAAAA |
| Water Filter                                      | RAC00WFAAAA |
| Deodorizing Filter                                | RAC00DFAAAA |

| GENERAL PROPERTIES   |  |
|--|--|
| Panel Ready  | Yes  |
| Door Swing   | Left   |
| Push-To-Open™ Door Assist  | Yes  |
| Internal Water Dispenser   | Yes  |
| iQ RemoteView™ Camera  | Yes (2 ea)   |
| Deodorizing Filter   | Yes  |
| Lighting   | 3DLighting™  |
| Interior Material  | SteelCool™ Stainless Steel<br>Interior   |
| Full Width Shelves   | 4 ea   |
| Shelf Material   | Tempered, Metal Trim, Spill-<br>Proof  |
| Full Extension Drawers at 90° Door<br>Opening Angle  | Yes  |
| FreshZone™ Drawer  | Yes - Cheese (37°F) / Cold<br>Drinks (33°F) / Meat (29°F)  |
| Humidity Control Drawer  | 2 ea   |
| Door Bins  | 4 ea   |
| Door Open Alarm  | Yes  |
| Special Modes  | Sabbath Mode   |
| CAPACITY   |  |
| Total Unit Gross Capacity (cu. ft.) -<br>AHAM  | 17.8 cu. ft.   |
| Refrigerator Gross Capacity (cu. ft.)  | 17.8 cu. ft.   |
| PERFORMANCE  |  |
|  |  |
| Dedicated Evaportator & Compressor System  | Yes  |
|  | Yes<br>Yes   |
| sor System   |  |
| sor System Power Cool  | Yes Minimized temperature fluc-  |
| sor System  Power Cool  Precise Cooling  | Yes Minimized temperature fluc-  |
| sor System  Power Cool  Precise Cooling  TECHNICAL DETAILS   | Yes  Minimized temperature fluctuation ±0.36°F* (±0.2°C*)  |
| sor System  Power Cool  Precise Cooling  TECHNICAL DETAILS  Current (A)  | Yes  Minimized temperature fluctuation ±0.36°F* (±0.2°C*)  |
| sor System Power Cool Precise Cooling  TECHNICAL DETAILS  Current (A)  Volts (V)   | Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*)  3 115  |
| sor System  Power Cool  Precise Cooling  TECHNICAL DETAILS  Current (A)  Volts (V)  Frequency (Hz)   | Yes  Minimized temperature fluctuation ±0.36°F* (±0.2°C*)  3 115 60  |
| sor System  Power Cool  Precise Cooling  TECHNICAL DETAILS  Current (A)  Volts (V)  Frequency (Hz)  Power Cord Length (in.)  | Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*)  3 115 60 78.34"  |
| sor System Power Cool Precise Cooling  TECHNICAL DETAILS  Current (A)  Volts (V)  Frequency (Hz)  Power Cord Length (in.)  Plug Type   | Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*)  3 115 60 78.34"  |
| sor System  Power Cool  Precise Cooling  TECHNICAL DETAILS  Current (A)  Volts (V)  Frequency (Hz)  Power Cord Length (in.)  Plug Type  DIMENSIONS & WEIGHT  | Yes  Minimized temperature fluctuation ±0.36°F* (±0.2°C*)  3 115 60 78.34" 120V, 3 Prong   |
| sor System  Power Cool  Precise Cooling  TECHNICAL DETAILS  Current (A)  Volts (V)  Frequency (Hz)  Power Cord Length (in.)  Plug Type  DIMENSIONS & WEIGHT  Appliance dimensions (H x W x D) (in.)  | Yes  Minimized temperature fluctuation ±0.36°F* (±0.2°C*)  3 115 60 78.34" 120V, 3 Prong  83 3/8" x 29 5/8" x 23 13/16"                                      |
| sor System Power Cool Precise Cooling  TECHNICAL DETAILS Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.)  | Yes  Minimized temperature fluctuation ±0.36°F* (±0.2°C*)  3 115 60 78.34" 120V, 3 Prong  83 3/8" × 29 5/8" × 23 13/16" 84" × 30" × 25"                      |
| sor System  Power Cool  Precise Cooling  TECHNICAL DETAILS  Current (A)  Volts (V)  Frequency (Hz)  Power Cord Length (in.)  Plug Type  DIMENSIONS & WEIGHT  Appliance dimensions (H x W x D) (in.)  Required Cutout Size (H x W x D) (in.)  Net Weight (lbs)  | Yes  Minimized temperature fluctuation ±0.36°F* (±0.2°C*)  3 115 60 78.34" 120V, 3 Prong  83 3/8" × 29 5/8" × 23 13/16" 84" × 30" × 25"                      |
| sor System Power Cool Precise Cooling  TECHNICAL DETAILS Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net Weight (lbs) EFFICIENCY  | Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*)  3 115 60 78.34" 120V, 3 Prong  83 3/8" x 29 5/8" x 23 13/16" 84" x 30" x 25" 472                   |
| sor System  Power Cool  Precise Cooling  TECHNICAL DETAILS  Current (A)  Volts (V)  Frequency (Hz)  Power Cord Length (in.)  Plug Type  DIMENSIONS & WEIGHT  Appliance dimensions (H x W x D) (in.)  Required Cutout Size (H x W x D) (in.)  Net Weight (lbs)  EFFICIENCY  ENERGY STAR Qualified   | Yes  Minimized temperature fluctuation ±0.36°F* (±0.2°C*)  3 115 60 78.34" 120V, 3 Prong  83 3/8" x 29 5/8" x 23 13/16" 84" x 30" x 25" 472  Yes             |
| sor System  Power Cool  Precise Cooling  TECHNICAL DETAILS  Current (A)  Volts (V)  Frequency (Hz)  Power Cord Length (in.)  Plug Type  DIMENSIONS & WEIGHT  Appliance dimensions (H x W x D) (in.)  Required Cutout Size (H x W x D) (in.)  Net Weight (lbs)  EFFICIENCY  ENERGY STAR Qualified  Annual Energy Consumption  | Yes  Minimized temperature fluctuation ±0.36°F* (±0.2°C*)  3 115 60 78.34" 120V, 3 Prong  83 3/8" x 29 5/8" x 23 13/16" 84" x 30" x 25" 472  Yes             |
| sor System Power Cool Precise Cooling  TECHNICAL DETAILS Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net Weight (lbs) EFFICIENCY ENERGY STAR Qualified Annual Energy Consumption WARRANTY Limited, Entire Appliance, Parts and Labor on Any Part of the Refriger- | Yes Minimized temperature fluctuation ±0.36°F* (±0.2°C*)  3 115 60 78.34" 120V, 3 Prong  83 3/8" x 29 5/8" x 23 13/16" 84" x 30" x 25" 472  Yes 280 kWy/year |

## DRR3090LAP


# **30-INCH REFRIGERATOR COLUMN, LEFT-HINGE** MODERNIST, PANEL-READY



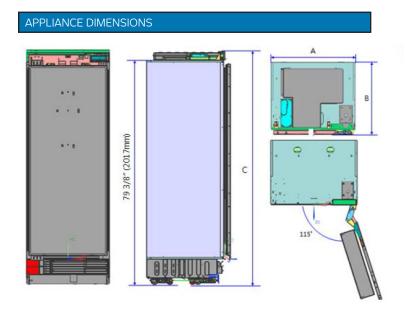


|            | 30"               |
|------------|-------------------|
| A (Width)  | 29 5/8" (752mm)   |
| B (Depth)  | 23 13/16" (605mm) |
| C (Height) | 83 3/8"" (2118mm) |

### INSTALLATION CUTOUT DIMENSIONS

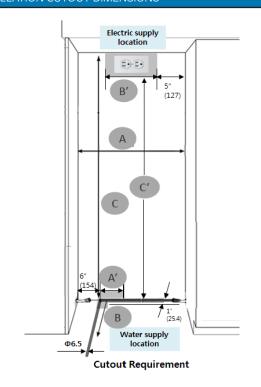

|            | 30"          |
|------------|--------------|
| A (Width)  | 30" (762mm)  |
| B (Depth)  | 25" (635mm)  |
| C (Height) | 84" (2134mm) |
| A'         | 6" (152mm)   |
| B'         | 20" (508mm)  |
| C'         | 80" (2032mm) |



|                 | 30″              |
|-----------------|------------------|
| A-1<br>(Width)  | 29 3/4" (756mm)  |
| A-2<br>(Height) | 79 7/8" (2029mm) |
| A-3<br>(Depth)  | 3/4" (19mm)      |
| Max<br>Weight   | 88.0 lbs. (40kg) |

## DRR3090RAP

## 30-INCH REFRIGERATOR COLUMN, RIGHT-HINGE MODERNIST, PANEL-READY







- Full height door with true flush cabinet integration without exposed venting grille
  • SteelCool™ Stainless Steel Interior Illuminated by 3DLighting™
- Push-To-Open™ Door Assist opens the door upon a slight push for a luxuriously convenient experience
  • Internal Water Dispenser for easy access to clean, filtered water
- iQ RemoteView™ Cameras (Wi-Fi) enables users to check what's in your fridge from your phone

| TEMPERATURE RANGES        |                                      |
|---------------------------|--------------------------------------|
| Refrigerator              | 34°F (1°C) to 44°F (7°C)             |
| Refrigerator - Power Cool | 34°F (1°C)                           |
| FreshZone™ Drawer         | 37°F (3°C) / 33°F (1°C) /29°F (-1°C) |


| ACCESSORIES (OPTIONAL)                             |             |
|--|-------------|
| Graphite Stainless Steel - 30" Panel (Right Hinge) | RAC30DPRHMS |
| Graphite Stainless Steel - 30" Kick Plate          | RAC30TKBBMS |
| Graphite Stainless Steel - Modernist Handle        | RAC00MHAAMS |
| Silver Stainless Steel - 30" Panel (Right Hinge)   | RAC30DPRHSR |
| Silver Stainless Steel - 30" Kick Plate            | RAC30TKBBSR |
| Silver Stainless Steel - Modernist Handle          | RAC00MHAASR |
| Silver Stainless Steel - Dacor Pro Handle          | RAC00PHAASR |
| Pair Installation Kit                              | RAC00CPAAAA |
| Water Filter                                       | RAC00WFAAAA |
| Deodorizing Filter                                 | RAC00DFAAAA |

| GENERAL PROPERTIES   |   |
|--|---|
| Panel Ready  | Yes   |
| Door Swing   | Right   |
| Push-To-Open™ Door Assist  | Yes   |
| Internal Water Dispenser   | Yes   |
| iQ RemoteView™ Camera  | Yes (2 ea)  |
| Deodorizing Filter   | Yes   |
| Lighting   | 3DLighting™   |
| Interior Material  | SteelCool™ Stainless Steel<br>Interior                    |
| Full Width Shelves   | 4 ea  |
| Shelf Material   | Tempered, Metal Trim, Spill-<br>Proof                     |
| Full Extension Drawers at 90° Door<br>Opening Angle                                | Yes   |
| FreshZone™ Drawer  | Yes - Cheese (37°F) / Cold<br>Drinks (33°F) / Meat (29°F) |
| Humidity Control Drawer  | 2 ea  |
| Door Bins  | 4 ea  |
| Door Open Alarm  | Yes   |
| Special Modes  | Sabbath Mode  |
| CAPACITY   |   |
| Total Unit Gross Capacity (cu. ft.) -<br>AHAM                                      | 17.8 cu. ft.  |
| Refrigerator Gross Capacity (cu. ft.)  | 17.8 cu. ft.  |
| PERFORMANCE  |   |
| Dedicated Evaportator & Compressor System  | Yes   |
| Power Cool   | Yes   |
| Precise Cooling  | Minimized temperature fluctuation ±0.36°F* (±0.2°C*)      |
| TECHNICAL DETAILS  |   |
| Current (A)  | 3   |
| Volts (V)  | 115   |
| Frequency (Hz)   | 60  |
| Power Cord Length (in.)  | 78.34"  |
| Plug Type  | 120V, 3 Prong   |
| DIMENSIONS & WEIGHT  |   |
| Appliance dimensions (H $\times$ W $\times$ D) (in.)                               | 83 3/8" x 29 5/8" x 23 13/16"                             |
| Required Cutout Size (H x W x D) (in.)   | 84" x 30" x 25"   |
| Net Weight (lbs)   | 472   |
| EFFICIENCY   |   |
| ENERGY STAR Qualified  | Yes   |
| Annual Energy Consumption  | 280 kWy/year  |
| WARRANTY   |   |
| Limited, Entire Appliance, Parts and<br>Labor on Any Part of the Refriger-<br>ator | 2 Year  |
| Limited Warranty for Sealed Refrigeration System; Parts and Labor                  | 3rd to 6th Year   |
| Limited Warranty for Sealed Refrigeration System; Parts Only                       | 7th to 12th Year  |

## DRR3090RAP


# **30-INCH REFRIGERATOR COLUMN, RIGHT-HINGE** MODERNIST, PANEL-READY



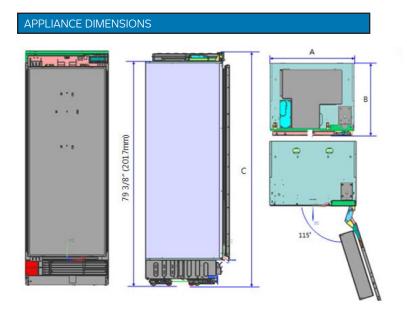


|            | 30"               |
|------------|-------------------|
| A (Width)  | 29 5/8" (752mm)   |
| B (Depth)  | 23 13/16" (605mm) |
| C (Height) | 83 3/8"" (2118mm) |

### INSTALLATION CUTOUT DIMENSIONS

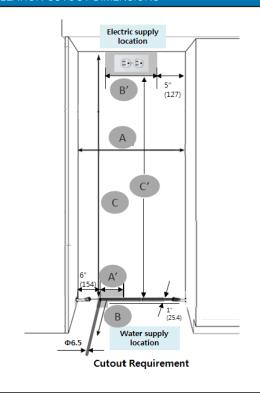

|            | 30"          |
|------------|--------------|
| A (Width)  | 30" (762mm)  |
| B (Depth)  | 25" (635mm)  |
| C (Height) | 84" (2134mm) |
| A'         | 6" (152mm)   |
| B'         | 20" (508mm)  |
| C'         | 80" (2032mm) |



|                 | 30″              |
|-----------------|------------------|
| A-1<br>(Width)  | 29 3/4" (756mm)  |
| A-2<br>(Height) | 79 7/8" (2029mm) |
| A-3<br>(Depth)  | 3/4" (19mm)      |
| Max<br>Weight   | 88.0 lbs. (40kg) |

## DRZ24980LAP

## 24-INCH FREEZER COLUMN, LEFT-HINGE

MODERNIST, PANEL-READY







- Full height door with true flush cabinet integration without exposed venting grille
- SteelCool™ Stainless Steel Interior Illuminated by 3DLighting™
- Push-To-Open<sup>™</sup> Door Assist opens the door upon a slight push for a luxuriously convenient experience
- Dual Icemaker with Standard and Cocktail Ice™
- Best-in class food preservation with dedicated evaporator/compressor and Precise Cooling Technology


| TEMPERATURE RANGES     |                             |
|------------------------|-----------------------------|
| Freezer                | 5°F (-15°C) to -8°F (-23°C) |
| Freezer - Power Freeze | -8°F (-23°C)                |

| ACCESSORIES (OPTIONAL)                            |             |
|---|-------------|
| Graphite Stainless Steel - 24" Panel (Left Hinge) | RAC24DPLHMS |
| Graphite Stainless Steel - 24" Kick Plate         | RAC24TKBBMS |
| Graphite Stainless Steel - Modernist Handle       | RAC00MHAAMS |
| Silver Stainless Steel - 24" Panel (Left Hinge)   | RAC24DPLHSR |
| Silver Stainless Steel - 24" Kick Plate           | RAC24TKBBSR |
| Silver Stainless Steel - Modernist Handle         | RAC00MHAASR |
| Silver Stainless Steel - Dacor Pro Handle         | RAC00PHAASR |
| Pair Installation Kit                             | RAC00CPAAAA |
| Water Filter                                      | RAC00WFAAAA |
| Deodorizing Filter                                | RAC00DFAAAA |

| GENERAL PROPERTIES   |  |
|--|--|
| Panel Ready  | Yes  |
| Door Swing   | Left   |
| Push-To-Open™ Door Assist  | Yes  |
| Icemaker   | Dual Icemaker for Standard                           |
| Ісептакег  | and Cocktail Ice™                                    |
| Lighting   | 3DLighting™  |
| Interior Material  | SteelCool™ Stainless Steel<br>Interior               |
| Full Width Shelves   | 3 ea   |
| Shelf Material   | Tempered, Metal Trim, Spill-<br>Proof                |
| Full Extension Drawers at 90° Door<br>Opening Angle                      | Yes  |
| Hidden Box with Flip-up Cover  | l ea   |
| Freezer Drawer   | 2 ea   |
| Door Bins  | 4 ea   |
| Door Open Alarm  | Yes  |
| Special Modes  | Sabbath Mode   |
| CAPACITY   |  |
| Total Unit Gross Capacity (cu. ft.) -<br>AHAM                            | 13.6 cu. ft.   |
| Freezer Gross Capacity (cu. ft.)   | 13.6 cu. ft.   |
| PERFORMANCE  |  |
| Dedicated Evaportator & Compressor System                                | Yes  |
| Power Freeze   | Yes  |
| Defrost Process  | Frost-Free   |
| Precise Cooling  | Minimized temeprature fluctuation ±0.36°F* (±0.2°C*) |
| DIMENSIONS   |  |
| Appliance dimensions (H x W x D) (in.)                                   | 83 3/8" x 23 5/8" x 23 13/16"                        |
| Required Cutout Size (H x W x D) (in.)                                   | 84" x 24" x 25"                                      |
| TECHNICAL DETAILS  |  |
| Current (A)  | 3  |
| Volts (V)  | 115  |
| Frequency (Hz)   | 60   |
| Power Cord Length (in.)  | 78 3/4"  |
| Plug Type  | 120V, 3 Prong  |
| EFFICIENCY   |  |
| ENERGY STAR Qualified  | Yes  |
| Annual Energy Consumption  | 500 kWh/year   |
| WARRANTY   |  |
| Limited, Entire Appliance, Parts and<br>Labor on Any Part of the Freezer | 2 Year   |
| Limited Warranty for Sealed Freezer<br>System; Parts and Labor           | 3rd to 6th Year                                      |
| Limited Warranty for Sealed Freezer<br>System; Parts Only                | 7th to 12th Year                                     |
|  |  |


## **24-INCH FREEZER COLUMN, LEFT-HINGE** MODERNIST, PANEL-READY



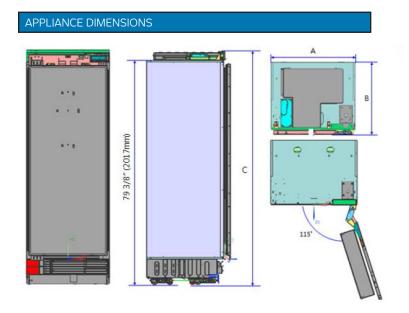


|            | 24"               |
|------------|-------------------|
| A (Width)  | 23 5/8" (600mm)   |
| B (Depth)  | 23 13/16" (605mm) |
| C (Height) | 83 3/8"" (2118mm) |

### INSTALLATION CUTOUT DIMENSIONS

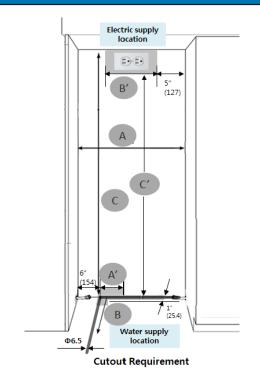

|            | 24"            |
|------------|----------------|
| A (Width)  | 24" (610mm)    |
| B (Depth)  | 25" (635mm)    |
| C (Height) | 84" (2134mm)   |
| A'         | 5 1/2" (140mm) |
| B'         | 14" (356mm)    |
| C'         | 80" (2032mm)   |



|                 | 24"               |
|-----------------|-------------------|
| A-1<br>(Width)  | 23 3/4" (603mm)   |
| A-2<br>(Height) | 79 7/8" (2029mm)  |
| A-3<br>(Depth)  | 3/4" (19mm)       |
| Max<br>Weight   | 110.0 lbs. (50kg) |

## DRZ24980RAP

## 24-INCH FREEZER COLUMN, RIGHT-HINGE

MODERNIST, PANEL-READY







- Full height door with true flush cabinet integration without exposed venting grille
- SteelCool™ Stainless Steel Interior Illuminated by 3DLighting™
- Push-To-Open<sup>™</sup> Door Assist opens the door upon a slight push for a luxuriously convenient experience
- Dual Icemaker with Standard and Cocktail Ice™
- Best-in class food preservation with dedicated evaporator/compressor and Precise Cooling Technology

| TEMPERATURE RANGES     |                             |
|------------------------|-----------------------------|
| Freezer                | 5°F (-15°C) to -8°F (-23°C) |
| Freezer - Power Freeze | -8°F (-23°C)                |


| ACCESSORIES (OPTIONAL)                             |             |
|--|-------------|
| Graphite Stainless Steel - 24" Panel (Right Hinge) | RAC24DPRHMS |
| Graphite Stainless Steel - 24" Kick Plate          | RAC24TKBBMS |
| Graphite Stainless Steel - Modernist Handle        | RAC00MHAAMS |
| Silver Stainless Steel - 24" Panel (Right Hinge)   | RAC24DPRHSR |
| Silver Stainless Steel - 24" Kick Plate            | RAC24TKBBSR |
| Silver Stainless Steel - Modernist Handle          | RAC00MHAASR |
| Silver Stainless Steel - Dacor Pro Handle          | RAC00PHAASR |
| Pair Installation Kit                              | RAC00CPAAAA |
| Water Filter                                       | RAC00WFAAAA |
| Deodorizing Filter                                 | RAC00DFAAAA |

| and Cocktail Ice™  Lighting  Interior Material  Interior Material  SteelCool™ Stainless Stee Interior  Full Width Shelves  3 ea  Shelf Material  Tempered, Metal Trim, Spill Proof  Full Extension Drawers at 90° Door Opening Angle  Hidden Box with Flip-up Cover  Freezer Drawer  2 ea  Door Bins  Door Open Alarm  Yes  Special Modes  CAPACITY  Total Unit Gross Capacity (cu. ft.) - AHAM  Freezer Gross Capacity (cu. ft.)  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze  Percise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS   |  |  |
|---|--|--|
| Door Swing Push-To-Open™ Door Assist Ves  Icemaker Dual Icemaker for Standard and Cocktail Ice™ and Cocktail Ice™  Lighting Interior Material SteelCool™ Stainless Steel Interior Full Width Shelves 3 ea Shelf Material Fungered, Metal Trim, Spill Proof Full Extension Drawers at 90° Door Opening Angle Hidden Box with Flip-up Cover 1 ea Freezer Drawer 2 ea Door Bins 4 ea Door Open Alarm Yes Special Modes  CAPACITY Total Unit Gross Capacity (cu. ft.) - AHAM Freezer Gross Capacity (cu. ft.) PERFORMANCE  Dedicated Evaportator & Compressor System Power Freeze Precise Cooling Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS Appliance dimensions (H x W x D) (in.) 83 3/8" x 23 5/8" x 23 13/1 Required Cutout Size (H x W x D) (in.) 84" x 24" x 25"  TECHNICAL DETAILS  | GENERAL PROPERTIES   |  |
| Push-To-Open™ Door Assist  Icemaker  Icemaker  Dual Icemaker for Standard and Cocktail Ice™  Lighting  Interior Material  SteelCool™ Stainless Steel Interior  Full Width Shelves  3 ea  Tempered, Metal Trim, Spill Proof  Full Extension Drawers at 90° Door Opening Angle  Hidden Box with Flip-up Cover  Freezer Drawer  Door Bins  Door Open Alarm  Yes  Special Modes  CAPACITY  Total Unit Gross Capacity (cu. ft.) - AHAM  Freezer Gross Capacity (cu. ft.)  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze  Percise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.)  84" x 24" x 25"  TECHNICAL DETAILS   | Panel Ready  | Yes  |
| Lighting 3DLighting™  Interior Material SteelCool™ Stainless Steel Interior Material SteelCool™ Stainless Steel Interior Material SteelCool™ Stainless Steel Interior Full Width Shelves 3 ea Tempered, Metal Trim, Spill Proof  Full Extension Drawers at 90° Door Opening Angle Hidden Box with Flip-up Cover 1 ea Freezer Drawer 2 ea Door Bins 4 ea Door Open Alarm Yes Special Modes Sabbath Mode CAPACITY  Total Unit Gross Capacity (cu. ft.) - AlaAM 13.6 cu. ft.  PERFORMANCE Dedicated Evaportator & Compressor System Power Freeze Yes  Defrost Process Frost-Free Precise Cooling Minimized temeprature flutuation ±0.36°F* (±0.2°C*) DIMENSIONS  Appliance dimensions (H x W x D) (in.) 83 3/8" x 23 5/8" x 23 13/1 Required Cutout Size (H x W x D) (in.) 84" x 24" x 25"  TECHNICAL DETAILS  | Door Swing   | Right  |
| and Cocktail Ice™  Lighting  Interior Material  SteelCool™ Stainless Steel Interior  Full Width Shelves  3 ea  Shelf Material  Full Extension Drawers at 90° Door Opening Angle  Hidden Box with Flip-up Cover  Freezer Drawer  Door Bins  4 ea  Door Open Alarm  Yes  Special Modes  CAPACITY  Total Unit Gross Capacity (cu. ft.) - AHAM  Freezer Gross Capacity (cu. ft.)  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze  Precise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.)  84" x 24" x 25"  TECHNICAL DETAILS  | Push-To-Open™ Door Assist  | Yes  |
| Interior Material  SteelCool™ Stainless Steel Interior  Full Width Shelves  3 ea  Shelf Material  Tempered, Metal Trim, Spill Proof  Full Extension Drawers at 90° Door Opening Angle  Hidden Box with Flip-up Cover  Freezer Drawer  2 ea  Door Bins  4 ea  Door Open Alarm  Yes  Special Modes  CAPACITY  Total Unit Gross Capacity (cu. ft.) - AHAM  Freezer Gross Capacity (cu. ft.)  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze  Precise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.)  84″ x 24″ x 25″  TECHNICAL DETAILS  | Icemaker   | Dual Icemaker for Standard<br>and Cocktail Ice™      |
| Full Width Shelves  Shelf Material  Full Extension Drawers at 90° Door Opening Angle  Hidden Box with Flip-up Cover  Feezer Drawer  Door Bins  Door Open Alarm  Yes  Special Modes  CAPACITY  Total Unit Gross Capacity (cu. ft.) - AHAM  Freezer Gross Capacity (cu. ft.)  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze  Precise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.)  84" x 24" x 25"  TECHNICAL DETAILS  | Lighting   | 3DLighting™  |
| Shelf Material  Full Extension Drawers at 90° Door Opening Angle  Hidden Box with Flip-up Cover Freezer Drawer  Door Bins  Door Open Alarm  Special Modes  CAPACITY  Total Unit Gross Capacity (cu. ft.) - AHAM  Freezer Gross Capacity (cu. ft.)  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze  Precise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.)  Required Cutout Size (H x W x D) (in.)  Required Cutout Size (H x W x D) (in.)  Tea  Tea  Tempered, Metal Trim, Spill Proof  Yes  1 ea  2 ea  2 ea  2 ba  4 ea  3 3.6 cu. ft.  13.6 cu. ft.  PERFORMANCE  Yes  Precise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.)  Required Cutout Size (H x W x D) (in.)  TECHNICAL DETAILS | Interior Material  | SteelCool™ Stainless Steel<br>Interior               |
| Full Extension Drawers at 90° Door Opening Angle Hidden Box with Flip-up Cover Freezer Drawer  Door Bins  Door Open Alarm  Special Modes  CAPACITY  Total Unit Gross Capacity (cu. ft.) - AHAM Freezer Gross Capacity (cu. ft.)  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze  Precise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.)  84" x 24" x 25"  TECHNICAL DETAILS   | Full Width Shelves   | 3 ea   |
| Opening Angle  Hidden Box with Flip-up Cover  Freezer Drawer  Door Bins  4 ea  Door Open Alarm  Yes  Special Modes  CAPACITY  Total Unit Gross Capacity (cu. ft.) - AHAM  Freezer Gross Capacity (cu. ft.)  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze  Precise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.)  84" x 24" x 25"  TECHNICAL DETAILS  | Shelf Material   | Tempered, Metal Trim, Spill-<br>Proof                |
| Freezer Drawer  Door Bins  4 ea  Door Open Alarm  Yes  Special Modes  CAPACITY  Total Unit Gross Capacity (cu. ft.) - AHAM  Freezer Gross Capacity (cu. ft.)  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze  Percise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.)  Required Cutout Size (H x W x D) (in.)  84" x 24" x 25"  TECHNICAL DETAILS  |  | Yes  |
| Door Bins 4 ea  Door Open Alarm Yes  Special Modes Sabbath Mode  CAPACITY  Total Unit Gross Capacity (cu. ft.) - AHAM  Freezer Gross Capacity (cu. ft.) 13.6 cu. ft.  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze Yes  Defrost Process Frost-Free  Precise Cooling Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.) 83 3/8" x 23 5/8" x 23 13/1  Required Cutout Size (H x W x D) (in.) 84" x 24" x 25"  TECHNICAL DETAILS  | Hidden Box with Flip-up Cover  | l ea   |
| Door Open Alarm  Special Modes  CAPACITY  Total Unit Gross Capacity (cu. ft.) - AHAM  Freezer Gross Capacity (cu. ft.)  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze  Percise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.)  Required Cutout Size (H x W x D) (in.)  TECHNICAL DETAILS   | Freezer Drawer   | 2 ea   |
| Special Modes  CAPACITY  Total Unit Gross Capacity (cu. ft.) - 13.6 cu. ft.  Freezer Gross Capacity (cu. ft.) 13.6 cu. ft.  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze  Percise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.) 83 3/8" x 23 5/8" x 23 13/1  Required Cutout Size (H x W x D) (in.) 84" x 24" x 25"  TECHNICAL DETAILS   | Door Bins  | 4 ea   |
| Total Unit Gross Capacity (cu. ft.) - AHAM  Freezer Gross Capacity (cu. ft.)  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze  Defrost Process  Precise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.)  Required Cutout Size (H x W x D) (in.)  TECHNICAL DETAILS  | Door Open Alarm  | Yes  |
| Total Unit Gross Capacity (cu. ft.) - AHAM  Freezer Gross Capacity (cu. ft.) 13.6 cu. ft.  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze Yes  Defrost Process Frost-Free  Precise Cooling Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.) 83 3/8" x 23 5/8" x 23 13/1  Required Cutout Size (H x W x D) (in.) 84" x 24" x 25"  TECHNICAL DETAILS   | Special Modes  | Sabbath Mode   |
| AHAM  Freezer Gross Capacity (cu. ft.)  PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze  Percise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.)  Required Cutout Size (H x W x D) (in.)  TECHNICAL DETAILS   | CAPACITY   |  |
| PERFORMANCE  Dedicated Evaportator & Compressor System  Power Freeze  Defrost Process  Precise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.) 83 3/8" x 23 5/8" x 23 13/1  Required Cutout Size (H x W x D) (in.) 84" x 24" x 25"  TECHNICAL DETAILS  |  | 13.6 cu. ft.   |
| Dedicated Evaportator & Compressor System  Power Freeze  Pefrost Process  Precise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.) 83 3/8" x 23 5/8" x 23 13/1  Required Cutout Size (H x W x D) (in.) 84" x 24" x 25"  TECHNICAL DETAILS   | Freezer Gross Capacity (cu. ft.)   | 13.6 cu. ft.   |
| sor System  Power Freeze  Pefrost Process  Precise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.) 83 3/8" x 23 5/8" x 23 13/1  Required Cutout Size (H x W x D) (in.) 84" x 24" x 25"  TECHNICAL DETAILS  | PERFORMANCE  |  |
| Defrost Process  Precise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.) 83 3/8" x 23 5/8" x 23 13/1  Required Cutout Size (H x W x D) (in.) 84" x 24" x 25"  TECHNICAL DETAILS  |  | Yes  |
| Precise Cooling  Minimized temeprature flutuation ±0.36°F* (±0.2°C*)  DIMENSIONS  Appliance dimensions (H x W x D) (in.) 83 3/8" x 23 5/8" x 23 13/1  Required Cutout Size (H x W x D) (in.) 84" x 24" x 25"  TECHNICAL DETAILS   | Power Freeze   | Yes  |
| DIMENSIONS  Appliance dimensions (H x W x D) (in.) 83 3/8" x 23 5/8" x 23 13/1  Required Cutout Size (H x W x D) (in.) 84" x 24" x 25"  TECHNICAL DETAILS   | Defrost Process  | Frost-Free   |
| Appliance dimensions (H x W x D) (in.) 83 3/8" x 23 5/8" x 23 13/1 Required Cutout Size (H x W x D) (in.) 84" x 24" x 25"  TECHNICAL DETAILS  | Precise Cooling  | Minimized temeprature fluctuation ±0.36°F* (±0.2°C*) |
| Required Cutout Size (H x W x D) (in.) 84" x 24" x 25"  TECHNICAL DETAILS   | DIMENSIONS   |  |
| TECHNICAL DETAILS   | Appliance dimensions (H x W x D) (in.)                                   | 83 3/8" x 23 5/8" x 23 13/16"                        |
|   | Required Cutout Size (H x W x D) (in.)                                   | 84" x 24" x 25"                                      |
| Current (A) 3   | TECHNICAL DETAILS  |  |
|   | Current (A)  | 3  |
| Volts (V) 115   | Volts (V)  | 115  |
| Frequency (Hz) 60   | Frequency (Hz)   | 60   |
| Power Cord Length (in.) 78 3/4"   | Power Cord Length (in.)  | 78 3/4"  |
| Plug Type 120V, 3 Prong   | Plug Type  | 120V, 3 Prong  |
| EFFICIENCY  | EFFICIENCY   |  |
| ENERGY STAR Qualified Yes   | ENERGY STAR Qualified  | Yes  |
| Annual Energy Consumption 500 kWh/year  | Annual Energy Consumption  | 500 kWh/year   |
| WARRANTY  | WARRANTY   |  |
| Limited, Entire Appliance, Parts and Labor on Any Part of the Freezer   | Limited, Entire Appliance, Parts and<br>Labor on Any Part of the Freezer | 2 Year   |
| Limited Warranty for Sealed Freezer System; Parts and Labor   | Limited Warranty for Sealed Freezer                                      | 3rd to 6th Year                                      |
| Limited Warranty for Sealed Freezer System; Parts Only 7th to 12th Year   | Limited Warranty for Sealed Freezer<br>System; Parts Only                | 7th to 12th Year                                     |

## DRZ24980RAP


## **24-INCH FREEZER COLUMN, RIGHT-HINGE** MODERNIST, PANEL-READY



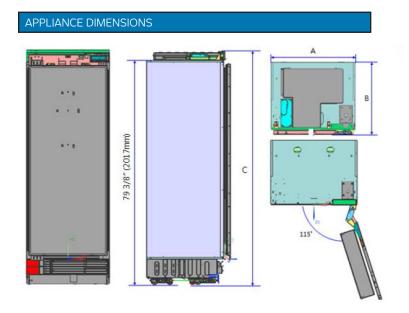


|            | 24"               |
|------------|-------------------|
| A (Width)  | 23 5/8" (600mm)   |
| B (Depth)  | 23 13/16" (605mm) |
| C (Height) | 83 3/8"" (2118mm) |

### INSTALLATION CUTOUT DIMENSIONS

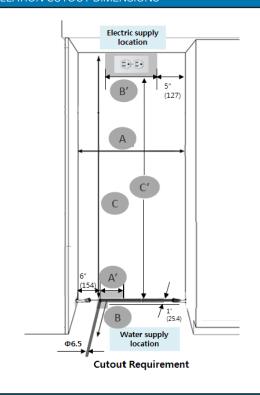

|            | 24"            |
|------------|----------------|
| A (Width)  | 24" (610mm)    |
| B (Depth)  | 25" (635mm)    |
| C (Height) | 84" (2134mm)   |
| A'         | 5 1/2" (140mm) |
| B'         | 14" (356mm)    |
| C'         | 80" (2032mm)   |



|                 | 24"               |
|-----------------|-------------------|
| A-1<br>(Width)  | 23 3/4" (603mm)   |
| A-2<br>(Height) | 79 7/8" (2029mm)  |
| A-3<br>(Depth)  | 3/4" (19mm)       |
| Max<br>Weight   | 110.0 lbs. (50kg) |