
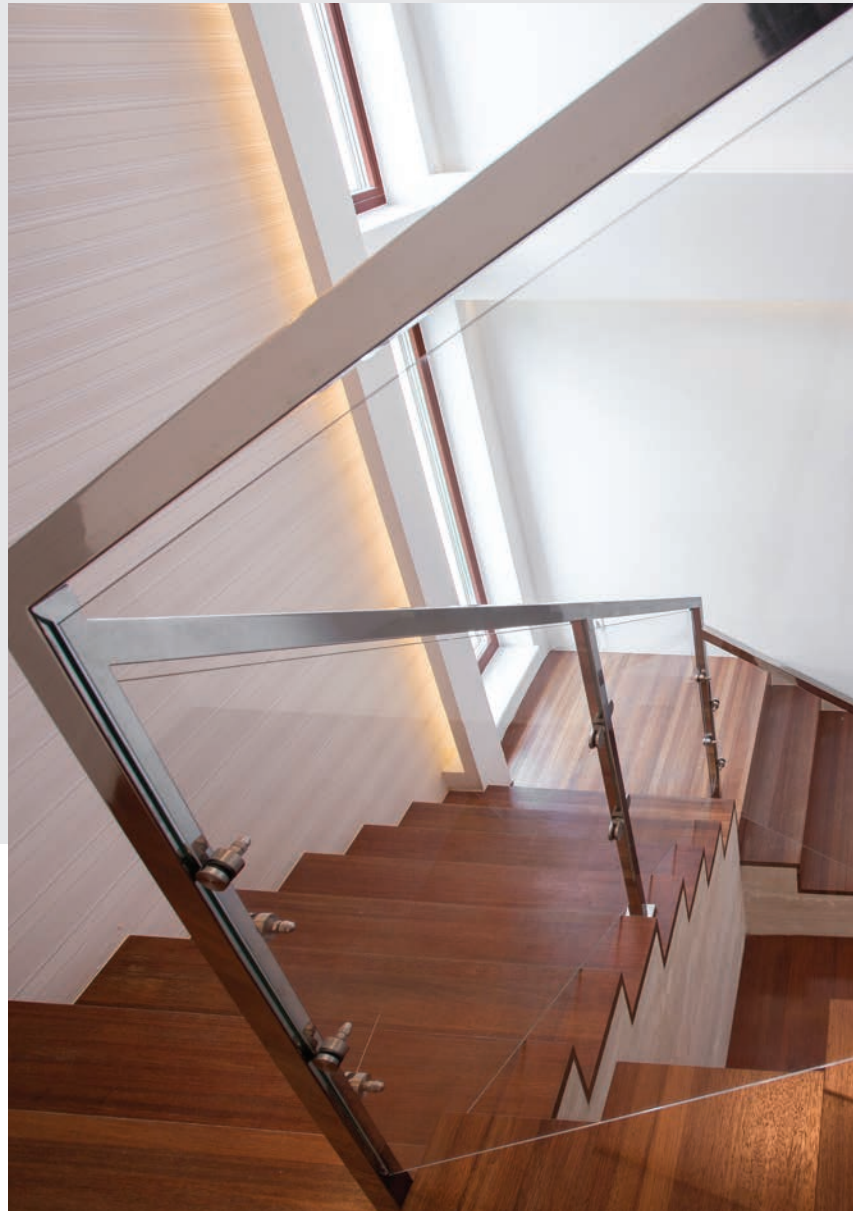


# 120V POWERLED LINEAR

LINEAR LED LIGHTING

Long runs and flexibility are the primary features of our smooth PowerLED linears. A sleek, driverless connection ensures smooth and continuous light in every application.

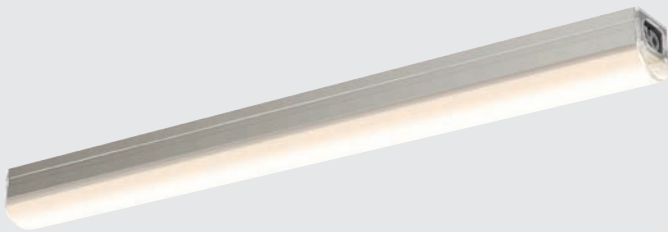

## KEY FEATURES

- Uniform light output
- Dimmable solution with integrated 120V driver
- Low-profile linear

## MODEL

<b>6009LED</b>	9" LED cove light, 3W, 3000K, 237 Lumens
<b>6009LED-4K</b>	9" LED cove light, 3W, 4000K, 237 Lumens
<b>6012LED</b>	12" LED cove light, 4W, 3000K, 319 Lumens
<b>6012LED-4K</b>	12" LED cove light, 4W, 4000K, 319 Lumens
<b>6024LED</b>	24" LED cove light, 8W, 3000K, 639 Lumens
<b>6024LED-4K</b>	24" LED cove light, 8W, 4000K, 639 Lumens
<b>6036LED</b>	36" LED cove light, 12W, 3000K, 1047 Lumens
<b>6036LED-4K</b>	36" LED cove light, 12W, 4000K, 1047 Lumens
<b>6048LED</b>	48" LED cove light, 16W, 3000K, 1284 Lumens
<b>6048LED-4K</b>	48" LED cove light, 16W, 4000K, 1284 Lumens

## SPECIFICATIONS

- Uniform light output.
- Over 50,000 hours of service life.
- Dimmable with regular low-voltage electronic dimmers.
- Smooth linear wide spread.
- Minimal heat emission.
- No UV light emission.
- Interconnectable.
- Very low profile.
- Robust construction.
- Multiple fixtures can be linked together (up to 200W).
- 80 CRI.
- ENERGY STAR certified.

## INSTALLATION


- Intended for surface mounting only.
- Its low profile makes it very easy to hide behind standard cabinet trims or in cove ceilings.
- Multiple fixtures can be linked together.

## FINISH

**SBA** Sandblasted aluminum

## ACCESSORIES

<b>6000-ACCE06</b>	6" (15 cm) extension cord
<b>6000-ACCE24</b>	24" (61 cm) extension cord
<b>6000-ACCE60</b>	60" (152.4 cm) extension cord
<b>6000-ACCLR</b>	Kit of left and right L connectors
<b>6000-ACCPC</b>	6' (182.9 cm) power cord
<b>6000-JB</b>	Junction box

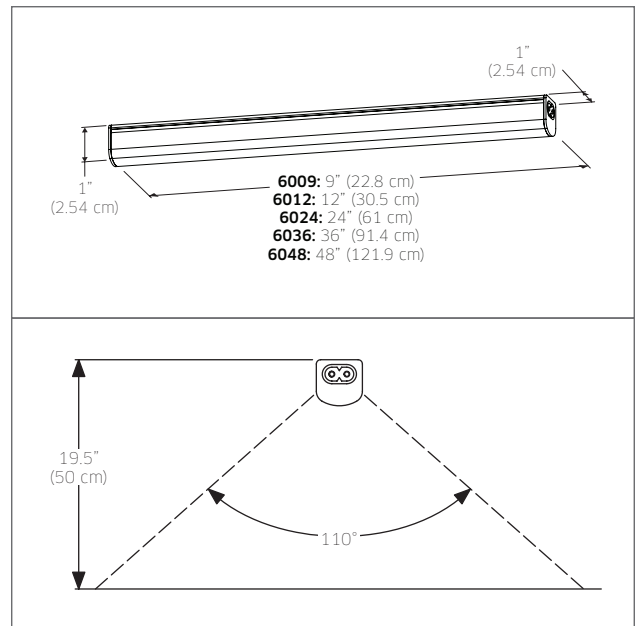

## ORDERING EXAMPLE

6009LED-SBA

Would order a 9" LED cove strip with a 3W LED array with 237 Lumens at 3000K in a sandblasted aluminum finish.