

Flat Gimbal

When searching for lighting flexibility, look no further than our 4" & 6" flat gimbal LED downlights. With a powerful lumen output and the ability to shine your light on a 360 degree rotation and a 90° tilt angle, this product will meet your every needs.



WET



SWIVEL/DIRECTIONAL



COLOR TEMPERATURE



IC RATED



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
FGM4-CC	4"	9 W	700 lm	850 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
FGM6-CC	6"	14.5 W	1050 lm	1200 lm	90		120 V

Specifications

Every fixture includes a junction box with integrated dimmable driver
 Can be daisy chained
 Superior LED performance and lifespan
 90° tilting, 360° rotation
 Minimal heat emission
 Aluminum construction
 Switch-selectable CCT: 2700K/3000 K/3500 K/4000 K/5000 K
 Low profile
 40° beam spread
 IC certification (suitable for direct contact with insulation)
 Air-tight certified as per ASTM E283-04
 Suitable for wet locations
 Refer to website for dimmer compatibility
 Ideal operating temperature:
 -20° to 40° C
 5-year warranty

Finish

- **BK** Black
- **SN** Satin Nickel
- **WH** White

Accessories

- RFP-UNI**
Universal rough-in plate
- RFP-46**
Rough-in plate for 4" and 6" models

Order example



FGM4-CC-BK

4" flat gimbal recessed downlight with 700 Lumens at 3000 K in a black finish

Note



Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALI representative for more information.

FGM4-CC

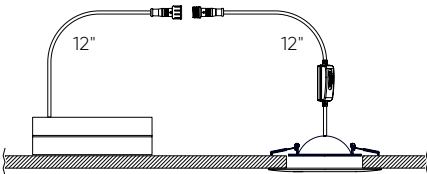

1-3/8" x 3-1/2" x 3-1/2"

FGM6-CC

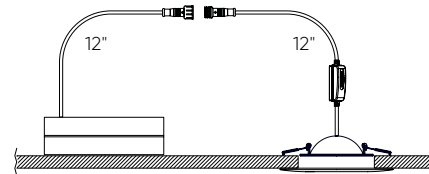

1-1/4" x 3-5/8" x 3-1/2"