


# Cylindrical pendant

These beautiful modern pendants with vertical light strips running along the side create tasteful accents to any interior design, whether in a cluster or standalone. Height adjustable 10-foot cables and flexible switch-selectable color temperatures make these decorative pendants an easy choice. Available in multiple sizes and finishes.



DAMP



COLOR TEMPERATURE



Intertek

| Model              | Size | Watts | Delivered lumens | CRI | Color °T                 | Voltage       |
|--------------------|------|-------|------------------|-----|--------------------------|---------------|
| <b>PDLED120-24</b> | 24"  | 30 W  | 300 lm           | 90  | 3000 K - 3500 K - 4000 K | 120 V - 277 V |
| <b>PDLED120-36</b> | 36"  | 30 W  | 300 lm           | 90  | 3000 K - 3500 K - 4000 K | 120 V - 277 V |
| <b>PDLED120-48</b> | 48"  | 30 W  | 300 lm           | 90  | 3000 K - 3500 K - 4000 K | 120 V - 277 V |
| <b>PDLED120-60</b> | 60"  | 30 W  | 300 lm           | 90  | 3000 K - 3500 K - 4000 K | 120 V - 277 V |

**Specifications**

Over 50,000 hours of service life  
 Adjustable cable length to 10 feet  
 Switch-selectable CCT: 3000 K/3500 K/4000 K inside canopy  
 Frosted reflector  
 Low power consumption  
 Superior color consistency  
 Canopy mount on 4" octagon junction box  
 Integrated dimmable driver

Compatible with TRIAC, ELV and 0-10 V dimmers  
 Suitable for damp locations  
 Refer to website for dimmer compatibility  
 5-year warranty

**Finish**

- **BK** Black
- **WH** White


**Order example**

**PDLED120-36-WH**  
 Dimmable PDLED120-36 36" cylindrical pendant in a white finish


**Note**

Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALs representative for more information.


**PDLED120-24**

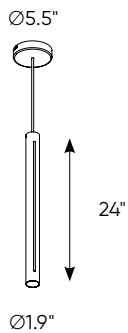


**PDLED120-36**



**PDLED120-48**




**PDLED120-60**



# Cylindrical pendant clusters

These beautiful modern pendants with vertical light strips running along the side create tasteful accents to any interior design. Height adjustable 10-foot cables and flexible switch-selectable color temperatures make these decorative pendants an easy choice. Available in multiple sizes and finishes.



| Model               | Size          | Watts | Delivered lumens | CRI | Color °T                 | Voltage       |
|---------------------|---------------|-------|------------------|-----|--------------------------|---------------|
| <b>PDLED120-5</b>   | Ø22"/5 lights | 150 W | 1500 lm          | 90  | 3000 K - 3500 K - 4000 K | 120 V - 277 V |
| <b>PDLED120-8</b>   | Ø26"/8 lights | 150 W | 1500 lm          | 90  | 3000 K - 3500 K - 4000 K | 120 V - 277 V |
| <b>PDLED120-SQ5</b> | 47"/5 lights  | 240 W | 2400 lm          | 90  | 3000 K - 3500 K - 4000 K | 120 V - 277 V |
| <b>PDLED120-SQ8</b> | 84"/8 lights  | 240 W | 2400 lm          | 90  | 3000 K - 3500 K - 4000 K | 120 V - 277 V |

### Specifications

Over 50,000 hours of service life  
 Individually adjustable cable length up to 10 feet  
 Switch-selectable CCT: 3000 K/3500 K/4000 K inside canopy  
 Frosted reflector  
 Low power consumption  
 Superior color consistency  
 Canopy mount on 4" octagon junction box  
 Integrated dimmable driver  
 Compatible with TRIAC, ELV and 0-10 V dimmers  
 Suitable for damp locations  
 Refer to website for dimmer compatibility  
 5-year warranty

### Finish

- **BK** Black
- **WH** White


### Order example

**PDLED120-8-WH**  
 Dimmable PDLED120-8, Ø26" canopy with 8 clustered cylindrical pendants in a white finish

### Note


Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALI representative for more information.

**PDLED120-5**

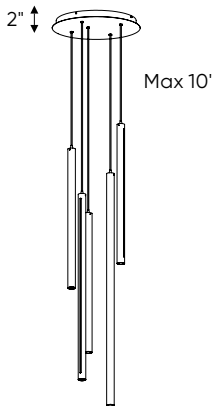


Ø22"

**PDLED120-8**

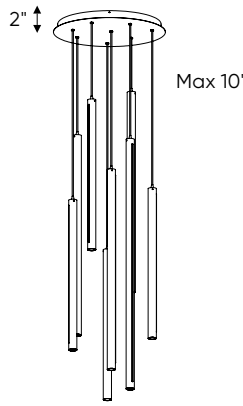


Ø26"

**PDLED120-SQ5**

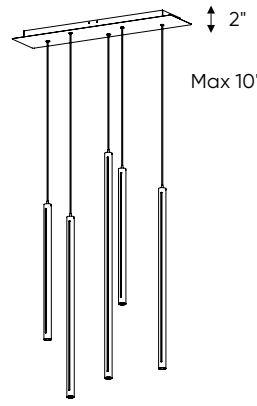

47-5/16" x 11"

**PDLED120-SQ8**

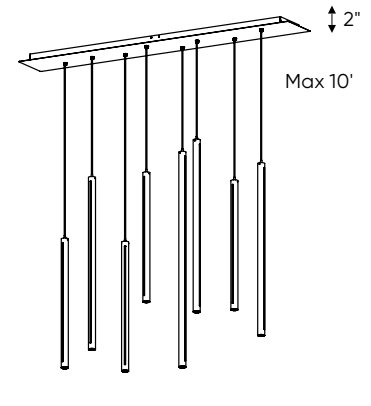

84" x 12"