



FLOOR | WALL

# HAUT MONDE™

STONE ATTACHÉ™ COLLECTION – COLORBODY™ PORCELAIN

 **daltile**®  
IMAGINE WHAT'S POSSIBLE™



Cover photo features Empire Black 24 x 48 field tile on the floor with Ambassador™ Voyager Black random linear mosaic on the wall. Above photo features Empire Black 24 x 48 field tile on the floor.

## Haut Monde™ – The Warmth and Elegance of Sandstone

Interpreting soft sandstone in modern hues, the Haut Monde Series provides the perfect design canvas for creating welcoming spaces. While the fine grain of sandstone provides a uniform appearance, a sense of dimension adds depth of interest to Haut Monde. Large and rectangular sizes as well as a contemporary mosaic all come in six deep neutral colors.

- NATURAL, CONTEMPORARY APPEAL
  - Soft, fine-grain natural sandstone look provides a uniform appearance that supports contemporary designs
  - Six modern hues with a range of cool and warm colors are available in two finishes for added design options
- ADDED DIMENSION
  - Three sizes available including a 24 x 48 large-format tile
  - Unique mosaic complements the soft look of Haut Monde floor tile



PRE-CONSUMER  
RECYCLED MATERIALS




TRU-EDGE




© 5% or less water absorption

### FIELD TILE


All colors available in Unpolished & Light Polished

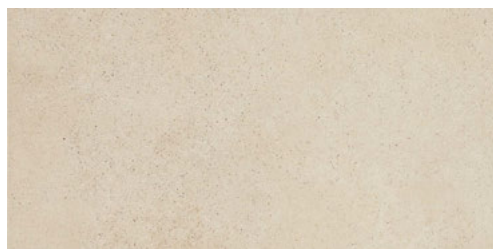


NOBILITY WHITE HM08

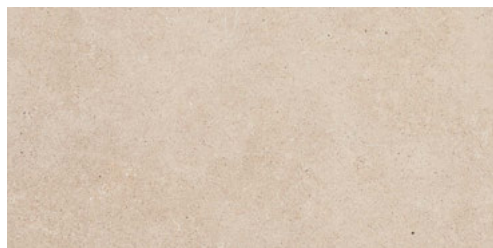

ARISTOCRAT CREAM HM07

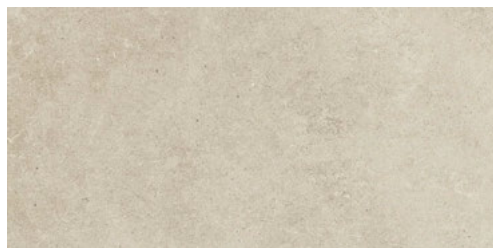

LEISURE BEIGE HM04

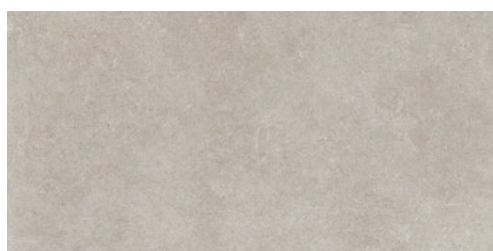

ELITE GREY HM05



GLITTERATI GRANITE HM03



EMPIRE BLACK HM06

### 2 x 2 MOSAIC




NOBILITY WHITE HM08



ARISTOCRAT CREAM HM07



LEISURE BEIGE HM04



ELITE GREY HM05



GLITTERATI GRANITE HM03






EMPIRE BLACK HM06

# HAUT MONDE™

STONE ATTACHÉ™ COLLECTION – COLORBODY™ PORCELAIN

## SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	24 x 48 Field Tile (Unpolished)	(23-7/16" x 47") (59.50 cm x 119.30 cm)	3/8"	15.50	2
	24 x 24 Field Tile (Unpolished)	(23-7/16" x 23-7/16") (59.50 cm x 59.50 cm)	3/8"	11.64	3
	12 x 24 Field Tile (Light Polished & Unpolished)	(11-11/16" x 23-7/16") (29.65 cm x 59.50 cm)	3/8"	9.70	5
	2 x 2 Mosaic (Unpolished)	(12" x 12" Sheet)	3/8"	3.88	4

## FLOOR APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior	N/A	✓
Wet & Level – Interior	≥ 0.42	✓*
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	

A DCOF value of ≥ 0.42 is the new standard for tiles specified for commercial application in standard A137.1–2012, Section 9.6. It replaces the SCOF value of ≥ 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest™, visit [www.daltile.com/dcof](http://www.daltile.com/dcof).




## OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	✓**

### APPLICATION NOTES:


- \* Unpolished surface only
  - \*\* Mosaics only
- Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.
- Light Polished surface is suitable only for dry and level floor applications.

## TRIM

	Type	Number	Size	Pieces per Carton
	Bullnose (Unpolished)	S-43F9	3 x 24	15
	Cove Base	S-36C9T	6 x 12	20
	Cove Base Corner	SC-36C9T	1 x 6	10

Bullnose, cove base and cove base corner trim are intended to coordinate with floor field tile in the standard 90-degree installation position.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%)	 High (V3)

## TEST RESULTS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 300 lbs.
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

## NOTES

- Special consideration needs to be given when installing tiles 20" and larger. Please refer to [daltile.com/LargeTiles](http://daltile.com/LargeTiles) for more information.
- Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.
- Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.
- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.
- For additional information refer to "Factors to Consider" at [daltile.com/Factors](http://daltile.com/Factors).



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit [daltilegreenworks.com](http://daltilegreenworks.com).

SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: [GET.DALTILE.COM](http://GET.DALTILE.COM)



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



IMAGINE WHAT'S POSSIBLE™

©2016 Dal-Tile Corporation (3/16)