



FLOOR

**UNITY™**  
COLORBODY™ PORCELAIN

 **daltile®**  
IMAGINE WHAT'S POSSIBLE™



Coverphoto features Avorio and Tobacco 12 x 24 field tile and Urban Metals™ Gunmetal 2 x 12 spiral border on the floor.  
Above photo features Tobacco 24 x 24 field tile on the floor.

## The Unity of Performance and Style Without Compromise

Your space requires peak performance and outstanding durability. Your design, however, calls for contemporary style and sophistication. This can be achieved with the ColorBody™ porcelain line, Unity™. This double-load porcelain tile is one of the toughest tiles available, yet it doesn't compromise on style. Style and performance unite with Unity from Daltile.

- **DOUBLE-LOAD PORCELAIN PRODUCED WITH MICROPOWDERS**
  - Offers the high performance of double-load ColorBody™ porcelain
  - Creates a more uniform visual for contemporary minimalist look
- **TRU-EDGE™**
  - Rectified for a seamless, unified look in large areas
- **CONTEMPORARY COLOR PALETTE & VISUAL**
  - Available in seven contemporary colors
  - Textured, unpolished and polished surfaces provide options for any space



**PRE-CONSUMER  
RECYCLED MATERIALS**



**TRU-EDGE**



PO L I S H E D F I E L D T I L E



Close-up  
of tile


TO B A C C O P 4 0 3



A V O R D P 4 0 0



B E I G E P 4 0 1

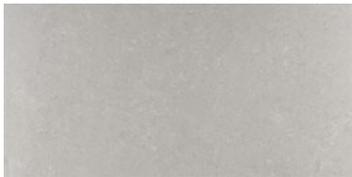

A S H G R E Y P 4 0 5



G R I D P 4 0 2



C O F F E E P 4 0 4



N E R O P 4 0 6

U N P O L I S H E D F I E L D T I L E



Close-up  
of tile


TO B A C C O P 4 0 3



A V O R D P 4 0 0



B E I G E P 4 0 1

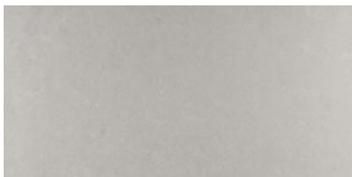

A S H G R E Y P 4 0 5



G R I D P 4 0 2




C O F F E E P 4 0 4



N E R O P 4 0 6

TEXTURED FIELD TILE

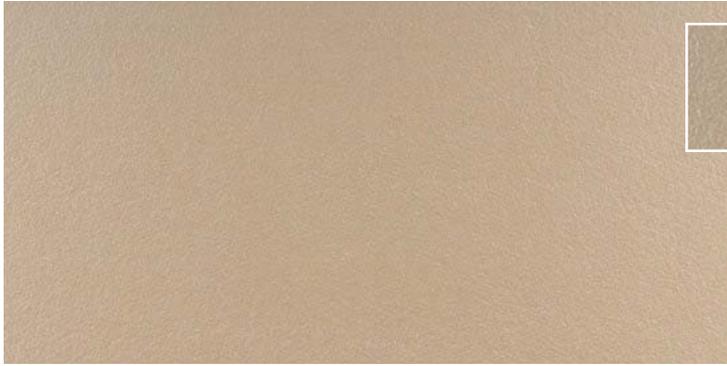

Close-up  
of tile



AVORD P400



BEIGE P401



ASHGREY P405



GRID P402




COFFEE P404



NERO P406

DECORATIVE ACCENTS

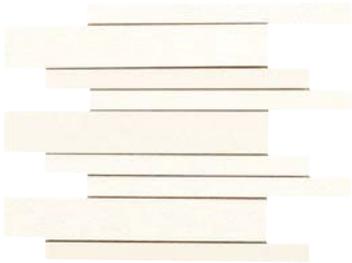

AVORD P400  
12 x 12 Modem Liner



BEIGE P401  
12 x 12 Modem Liner



ASHGREY P405  
12 x 12 Modem Liner



TOBACCO P403  
12 x 12 Modem Liner



GRID P402  
12 x 12 Modem Liner



COFFEE P404  
12 x 12 Modem Liner



NERO P406  
12 x 12 Modem Liner

**SIZES**

			Thickness	Sq.Ft. per Carton	Pieces per Carton
	24 x 24 Field Tile (Unpolished & Polished)	(23-7/16" x 23-7/16") (59.44 cm x 59.44 cm)	3/8"	15.28	4
	12 x 24 Field Tile (Unpolished, Polished & Textured)	(11-1/2" x 23-7/16") (29.56 cm x 59.44 cm)	3/8"	15.28	8
	12 x 12 Field Tile (Unpolished & Polished)	(11-1/2" x 11-1/2") (29.56 cm x 29.56 cm)	3/8"	10.23	11
	12 x 12 Modern Liner (Combination of surfaces)	(11-1/2" x 11-1/2") Sheet (29.56 cm x 29.56 cm Sheet)	3/8"	--	11

**FLOOR APPLICATIONS**

	Target DCOF wet	Suitable
Dry & Level- Interior	N/A	✓
Wet & Level- Interior	0.42	✓*
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	0.60	✓**
Ramps & Inclines	0.65	

A DCOF value of 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A 137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [dalTile.com/DCOF](http://dalTile.com/DCOF).

**OTHER APPLICATIONS**

	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	

**APPLICATION NOTES:**

- \*Unpolished and textured surfaces only
- \*\*Textured surface only
- Polished surface is suitable only for dry and level floor applications.
- Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

**TRIM**

Type	Number	Size	Pieces per Carton
 Bullnose (Unpolished and Polished)	S-43C9S	3 x 12	30
 Cove Base	S-36C9TA	6 x 12	20
 Cove Base Outcorner	SC-36C9TA	1 x 6	10

Bullnose, cove base, and cove base outcorner are intended to coordinate with floor field tile in the standard 90-degree installation position.

**INSTALLATION**

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and when installed in a staggered brick-pant pattern; overlap should not exceed 33%)	 Medium (V2)

**TEST RESULTS**

	ASTM #	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 450 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

**NOTES**

- Manufacturer Advisory (POLISHED ONLY): These tiles have a dynamic coefficient of friction < 0.42 as measured by the DCOF AcuTest method. Tiles with DCOF values < 0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A 137.1 section 6.2.2.110, available at [www.tileusa.com](http://www.tileusa.com).
- Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [dalTile.com/LargeTiles](http://dalTile.com/LargeTiles) for more information.
- Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.
- Since there are variations in allied ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A 137.1 standards.
- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.
- For additional information refer to "Factors to Consider" at [dalTile.com/Factors](http://dalTile.com/Factors).



DESIGNED TO HELP EARN LEED™ CREDIT. For more detailed information, visit [dalTilegreenworks.com](http://dalTilegreenworks.com).

SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: [GETDAL TILE.COM](http://GETDAL TILE.COM)



7834 C.F. Haw n Freeway,  
 Dallas, Texas 75217 | 1800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [dalTile.com](http://dalTile.com).



IMAGINE WHAT'S POSSIBLE™

© 2016 Dal-Tile Corporation (8/16)