



FLOOR

SPARK™

COLORBODY™ PORCELAIN

 **daltile®**
IMAGINE WHAT'S POSSIBLE™



Cover photo features Spark™ Toasted Luster 24 x 24 on the floor.
Above photo features Spark™ Firelight Flicker 12 x 24 in a grid pattern on the wall.

Make Your Space a Work of Art

If you want tile with style and a textured fabric-like surface, there's no better choice than Daltile's new Spark™ collection. Revel in the hues of this graphic contemporary ColorBody™ Porcelain tile. Ideal for both commercial and residential applications, it brings taste, sophistication and style to any design. Offered in a variety of rich complementary colors, all with a subtle luminescence, it commands attention. Create a modern and glamorous space

- ARTISTIC ELEMENTS
 - Give your space a unique and modern look inspired by textiles and concrete
- TRENDY SIZES
 - Ideal for large projects and open spaces
- COLORS THAT COMPLEMENT
 - Select from an array of cool and warm tones that pair perfectly
- HIGH-END & HARD WEARING
 - Rich aesthetic with unparalleled durability

 **PRE-CONSUMER RECYCLED MATERIALS**

 **LINEAR OPTIONS**

 **TRU-EDGE**

All or select items within this series meet the requirements for these qualifications. For more product information, visit daltile.com.

 **CERTIFIED PORCELAIN TILE**
0.5% or less water absorption

FLOOR TILE



FIRELIGHT FLICKER SK50



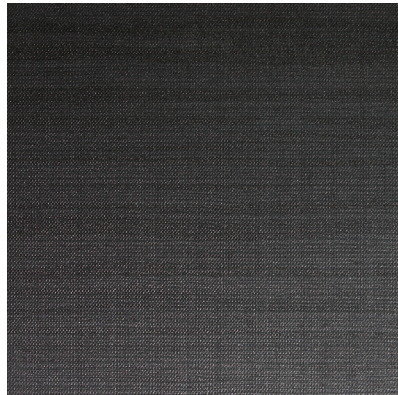
EMBER FLARE SK51



TOASTED LUSTER SK52



SMOKY GLIMMER SK53



MIDNIGHT GLOW SK54

MOSAIC BLENDS



COOL BLEND SK55



FIRELIGHT FLICKER



MIDNIGHT GLOW



SMOKY GLIMMER



WARM BLEND SK56



EMBER FLARE



FIRELIGHT FLICKER



TOASTED LUSTER

DECORATIVE ACCENTS



FIRELIGHT FLICKER/EMBER FLARE SK57








FIRELIGHT FLICKER/TOASTED LUSTER SK58






SMOKY GLIMMER/MIDNIGHT GLOW SK59

SIZES

			Thickness	Sq. Ft. Per Carton	Pieces Per Carton
	24 x 24 Floor Tile	(23-1/2" x 23-1/2") (59.50 cm x 59.50 cm)	7/16"	11.62	3
	12 x 24 Floor Tile	(11-5/8" x 23-1/2") (29.60 cm x 59.50 cm)	7/16"	11.62	6
	12 x 12 Floor Tile	(11-5/8" x 11-5/8") (29.60 cm x 29.60 cm)	7/16"	10.65	11
	6 x 24 Decorative Accent*	(5-13/16" x 23-1/2") (14.80 cm x 59.50 cm)	7/16"	--	6
	1 x 2 Mosaic (Mesh-mounted on 1' x 1' Sheet)	(11-5/8" x 11-5/8" Sheet) (29.60 cm x 29.60 cm Sheet)	7/16"	9.68	10

LINEAR OPTIONS™ SIZES

			Sq. Ft. Per Carton	Pieces Per Carton
	6 x 24 Floor Tile	(6" x 23-1/2") (14.63 cm x 59.50 cm)	10.65	11
	4 x 24 Floor Tile	(4" x 23-1/2") (9.73 cm x 59.50 cm)	6.46	10
	2 x 24 Floor Tile	(2" x 23-1/2") (4.67 cm x 59.50 cm)	6.66	20

Additional linear and rectangular sizes are also available.

FLOOR APPLICATIONS

	Target DCOF Wet	Suitable
Dry & Level - Interior	N/A	✓
Wet & Level - Interior	≥ 0.42	✓
Exterior Applications, pool decking & other wet areas with minial footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	




OTHER APPLICATIONS

	Suitable
Walls / Backsplashes	✓
Countertops	✓
Pool Linings	✓*

*Mosaic only


Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

TRIM

	Type	Number	Size	Pieces per Carton
	Bullnose	S-43C9	3 x 12	30
	Cove Base	S-36C9TB	6 x 12	30
	Cove Base Outcorner	SC-36C9TB	1 x 6	15

Bullnose, cove base, and cove base corner trim are intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern and/or when tile with a length 15" or greater is installed in a staggered brick-joint pattern. Overlap should not exceed 33%)	 High (V3)

TEST RESULTS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 500 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

NOTES

Special consideration must be given when installing tiles greater than 15". Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.

SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DALTILE.COM



7834 C. F. Hawn Freeway,
 Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2017 Daltile (3/17)