



FLOOR

WOODBIDGE™

GLAZED PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC
with REVEAL IMAGING®

 **daltile**®
IMAGINE WHAT'S POSSIBLE™



Cover photo features Woodbridge™ Spruce 4 x 28 on the floor and Opulence™ Amber 3/8 random linear mosaic on the pillars. Above photo features Woodbridge™ Spruce 4 x 28 on the floor.

Classic Style For Modern Living

Inspired by spaces that exude a certain *je ne sais quoi*, Woodbridge is the perfect foundation for spaces that are both relaxed and elegant. The inviting rich oak tones and unexpected 4 x 28 plank format exude personality when installed in either a herringbone or chevron pattern. Woodbridge is ideal to complement eclectic spaces that confidently contrast modern pieces with vintage finds.

- INVITING CANVAS
 - Captivating tones of almond, pecan, walnut and ash
 - Inspired by the beauty of time-honored oak
- VISUAL VERSATILITY
 - Unique narrow plank size of 4 x 28 with a 1 x 3 herringbone mosaic
 - Herringbone or chevron patterns add visual interest to any space



POST-CONSUMER RECYCLED MATERIALS



PRE-CONSUMER RECYCLED MATERIALS



MADE IN THE U.S.A.



REVEAL IMAGING®


All or select items within this series meet the requirements for these qualifications. For more product information, visit daltile.com.

CERTIFIED PORCELAIN™
TILE
© .5% or less water absorption

GLAZED PORCELAIN FLOOR TILE



SPRUCE WB96

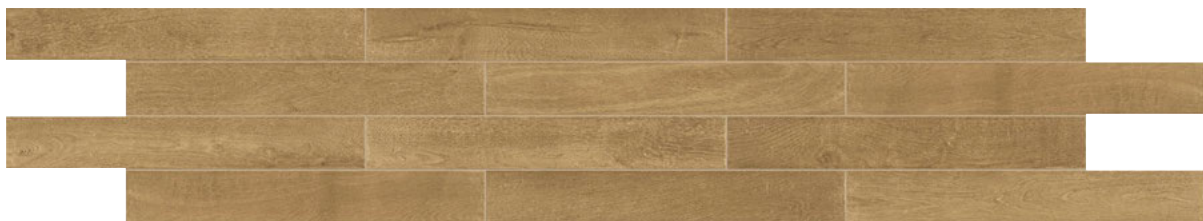

CEDAR WB97



CHESTNUT WB98



ASH OAK WB99

GLAZED CERAMIC 1 x 3 HERRINGBONE MOSAIC*



SPRUCE WB96



CEDAR WB97



CHESTNUT WB98





ASH OAK WB99

* Images shown are actual 9" x 12" mosaic sheets

WOODBRIIDGE™

GLAZED PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC with REVEAL IMAGING®

SIZES

| | | | Thickness | Sq. Ft. per Carton | Pieces per Carton |
|--|--|---|-----------|--------------------|-------------------|
|  | 4 x 28 Floor Tile | (3-15/16" x 27-1/2") (10.00 cm x 70.00 cm) | 5/16" | 9.00 | 12 |
|  | 1 x 3 Herringbone Mosaic (Dot-mounted on 9" x 12" Sheet) | (9" x 12" Sheet) (22.86 cm x 30.48 cm Sheet) | 1/4" | 5.98 | 10 |

FLOOR APPLICATIONS

| | Target DCOF wet | Suitable |
|---|-----------------|----------|
| Dry & Level – Interior | N/A | ✓ |
| Wet & Level – Interior | ≥ 0.42 | ✓* |
| Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear | ≥ 0.60 | |
| Ramps & Inclines | ≥ 0.65 | |

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

OTHER APPLICATIONS

| | Suitable |
|--------------------|----------|
| Walls/Backsplashes | ✓ |
| Countertops | ✓ |
| Pool Linings | ✓** |

APPLICATION NOTES:


* Floor tile and mosaic suitable. Mosaic also suitable for residential and light commercial shower floors.

** Mosaic only

Floor tile suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

Mosaic suitable for exterior applications in non-freezing climates only when proper installation methods are followed.

INSTALLATION

| Grout Joint Recommendation | Shade Variation |
|--|---|
| Floor: 3/16" (overlap should not exceed 33% when installing tile with a length of 15" or greater in a staggered brick-joint pattern) Mosaic: 1/8" |  High (V3) |

TEST RESULTS

| | ASTM# | Floor Result | Mosaic Result |
|---------------------|-------|--------------|---------------|
| Water Absorption | C373 | < 0.5% | < 3.0% |
| Breaking Strength | C648 | > 275 lbs | > 250 lbs |
| Scratch Hardness | MOHS | 8.0 | 8.0 |
| Chemical Resistance | C650 | Resistant | Resistant |
| Abrasion Resistance | C1027 | 3 | 3 |

For additional information, visit daltile.com/information/TestResults.

NOTES

Special consideration must be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DALTILE.COM



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2017 Daltile (1/17)