



DECORATIVE

COASTAL KEYSTONES™

COLORBODY™ PORCELAIN MOSAIC with OCEANSIDE GLASSTILE®

 **daltile**
IMAGINE WHAT'S POSSIBLE™




Cover photo features CoastalKeystones' Treasure Island 2 x 1 straight-point mosaic on backsplash, countertop and tub surround. Above photo features CoastalKeystones Sunset Cove 1 x 1 mosaic on the wall. Flagstone Slate in Sunflower is shown on the floor with Honey Onyx Marble on the countertops.

Escape with CoastalKeystones™

Head for the shoreline and sail away with the Coastal Keystones collection. Transform a bathtub into a cruise ship and be motivated by this modern and luxurious mosaic tile that lets you escape. In a magnificent range of sizes and hues, the glass and mosaic blends of tile adds sophistication and a worldly feel to virtually any space indoor or out.

- VERSATILE LUXURY
 - Sophisticated blend of glass and tile
 - Suitable for exteriors, interiors, pools, flooring, walls, countertops and beyond
- SEA OF DESIGN OPTIONS
 - 6 blends available in 4 different patterns
 - Create unique designs by mixing patterns

 POST-CONSUMER RECYCLED MATERIALS

 PRE-CONSUMER RECYCLED MATERIALS

 OCEANSIDE GLASSTILE

 CERTIFIED PORCELAIN TILE


COASTAL KEYSTONES™

COLORBODY™ PORCELAIN MOSAIC with OCEANSIDE GLASSTILE®

1 x 1 MOSAIC TILE



COCONUT BEACH BLEND CK85



TRADE WIND BLEND CK86



CARIBBEAN PALM BLEND CK87



TROPICAL THUNDER BLEND CK88



SUNSET COVE BLEND CK89



TREASURE ISLAND BLEND CK90

BLOCK RANDOM MOSAIC *



COCONUT BEACH BLEND CK85




TRADE WIND BLEND CK86



CARIBBEAN PALM BLEND CK87



TROPICAL THUNDER BLEND CK88



SUNSET COVE BLEND CK89



TREASURE ISLAND BLEND CK90

* Sheet can be cut into (3) 4 x 12 borders.

DECORATIVE

COASTAL KEYSTONES™

COLORBODY™ PORCELAIN MOSAIC with OCEANSIDE GLASSTILE®

2 x 1 STRAIGHT JOINT MOSAIC



COCONUT BEACH BLEND CK85




TRADE WIND BLEND CK86




CARIBBEAN PALM BLEND CK87



TROPICAL THUNDER BLEND CK88



SUNSET COVE BLEND CK89

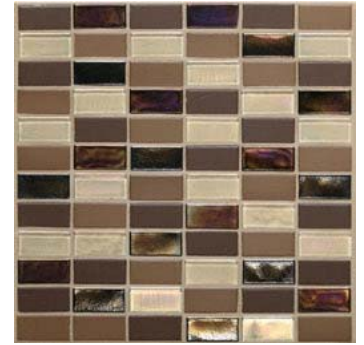

TREASURE ISLAND BLEND CK90

2 x 1 BRICK JOINT MOSAIC



COCONUT BEACH BLEND CK85



TRADE WIND BLEND CK86



CARIBBEAN PALM BLEND CK87



TROPICAL THUNDER BLEND CK88



SUNSET COVE BLEND CK89







TREASURE ISLAND BLEND CK90

COASTAL KEYSTONES™

COLORBODY™ PORCELAIN MOSAIC with OCEANSIDE GLASSTILE®

SIZES

			Thickness	Sq.Ft. per Carton	Pieces per Carton
	1x1 Mosaic	(12"x12" Sheet) (30.48 cm x 30.48 cm Sheet)	1/4"	15	15
	2x1 Straight-pint Mosaic	(12"x12" Sheet) (30.48 cm x 30.48 cm Sheet)	1/4"	15	15
	2x1 Brick-pint Mosaic	(12"x13" Sheet) (30.48 cm x 33.02 cm Sheet)	1/4"	15	15
	2x2, 2x1, 1x1 Block Random Mosaic†	(12"x12" Sheet) (30.48 cm x 30.48 cm Sheet)	1/4"	15	15

† Sheet can be cut into (3) 4 x 12 borders.

All sizes are paper-face mounted on 12" x 12" Sheet.

FLOOR APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level- Interior	N/A	✓*
Wet & Level- Interior	0.42	
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	0.60	
Ramps & Inclines	0.65	

A DCOF value of 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit dalTile.com/DCOF.

OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓**
Pool Linings	✓
Pool Tank/Submerged	✓***

APPLICATION NOTES:


* Suitable for residential and light commercial floor use (such as hotel bath) not subject to outside foot traffic.

** Residential and light commercial countertops only.

*** Coastal Keystones are paper-face mounted and are suitable for pool tanks and submerged applications.

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16" Approximately	 Random (V4)

TEST RESULTS

	ASTM #	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 350 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

NOTES

Strong random shading enhances the natural beauty of this product. To achieve optimal results, tile should be selected from multiple cartons and shading arranged planned prior to installation.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in affiliated ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at dalTile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDENTIALS. For more detailed information, visit dalTilegreenworks.com.



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GETDALTILE.COM



7834 C.F. Hawin Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at dalTile.com.

 **daltile®**

IMAGINE WHAT'S POSSIBLE™

© 2016 Dal-Tile Corporation (10/16)