



DECORATIVE

**CLIO™**

GLASS & STONE MOSAICS

 **daltile®**  
IMAGINE WHAT'S POSSIBLE™




Above and cover photos feature Selene 1 x Random mosaic on fireplace wall. Floor features Season Wood™ Snow Pine in 12 x 48, 8 x 48, and 6 x 48 random linear pattern on the floor.

## Unlock Your Room's Potential

Behold the perfect pairing of sophistication and daring design. Clío™ mosaics from Daltile is a fresh blend of stone and glass in a versatile mosaic. The rich look of polished stone is randomly mixed with glass in glossy and frosted finishes. Stretch your creativity as you contemplate installing it vertically, horizontally or cut down to smaller pieces to be used as accents to another tile. Clío mosaics will win you over time and time again as you proudly admire your unique and stylish new space.

- **UNIQUE STONE & GLASS MOSAIC**
  - These popular materials integrate easily into any style
  - Varied width mosaic is a unique mosaic option
- **EASY INSTALLATION**
  - You can place vertically or horizontally for more design options

1 x RANDOM MOSAIC

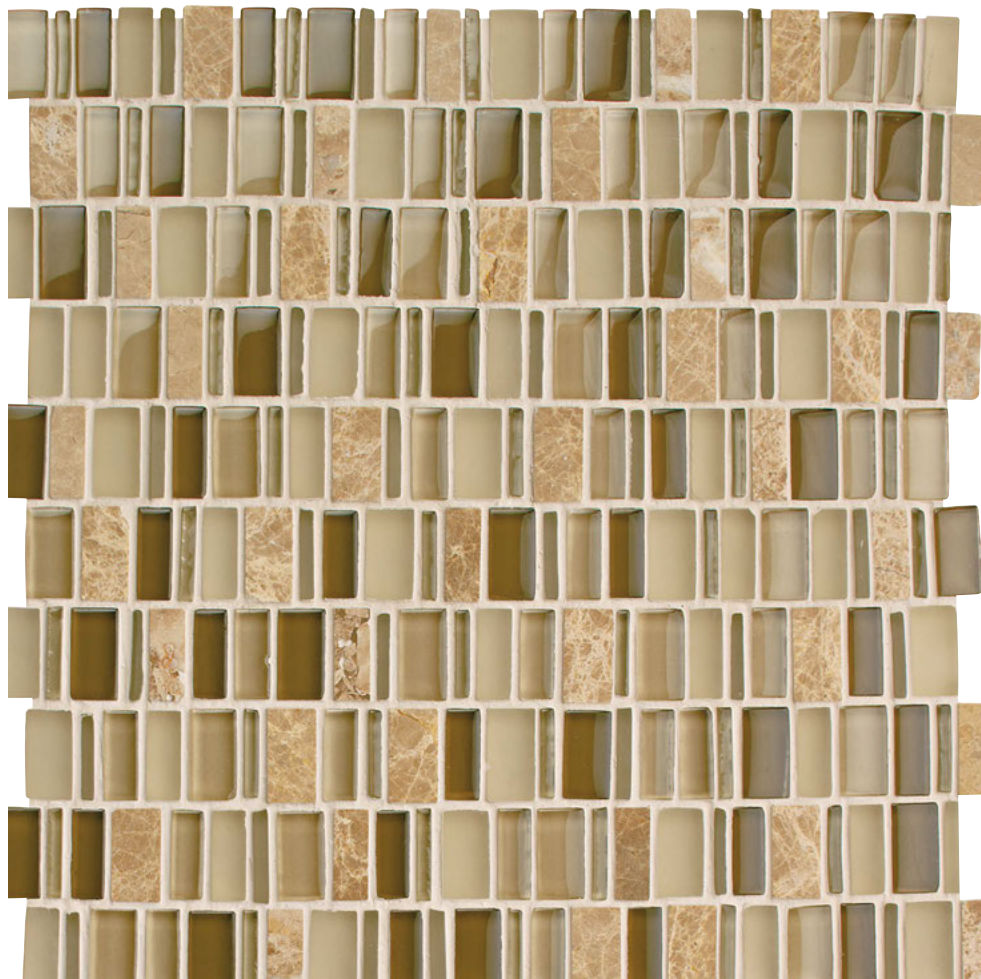

SELENE CL16



LUNA CL13



NOX CL14



HERA CL15




EOS CL17



BOREAS CL18

**SIZES**

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	1 x Random Mosaic (Mesh-mounted on 12" x 12" Sheet)	(11-3/4" x 11-3/4" Sheet) (29.80 cm x 29.80 cm Sheet)	5/16"	9.60	10

**APPLICATIONS**

	Suitable
Floors	
Walls/Backsplashes	✓
Countertops	
Pool Linings	

**APPLICATION NOTES:**

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

**INSTALLATION**

Grout Joint Recommendation	Shade Variation
1/8"	 Random (V4)

**TEST RESULTS**

	ASTM#	Result
Water Absorption	C373	< 0.1%
Breaking Strength	C648	> 100 lbs.
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant

**NOTES**

Pre-grout sealing is recommended when installing all natural stone decorative accents. This prevents grout from staining the stone during the grouting process, and to ease in grout clean-up. After installation, sealing of the stone will reduce porosity and increase stain resistance. Use a penetrating or surface coating type of sealer, depending on desired aesthetic.

Strong random shading enhances the natural beauty of this product. To achieve optimal results, tile should be selected from multiple cartons and shading arrangement planned prior to installation.

Since there are variations in all glass and stone products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI 137.2 standards.

For additional information refer to "Factors to Consider" at [daltile.com/Factors](http://daltile.com/Factors).



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit [daltilegreenworks.com](http://daltilegreenworks.com).



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: [GET.DALTILE.COM](http://GET.DALTILE.COM)



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



IMAGINE WHAT'S POSSIBLE™

©2016 Dal-Tile Corporation (6/16)