


FLOOR | WALL

CONTINENTAL SLATE™

COLORBODY™ PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC



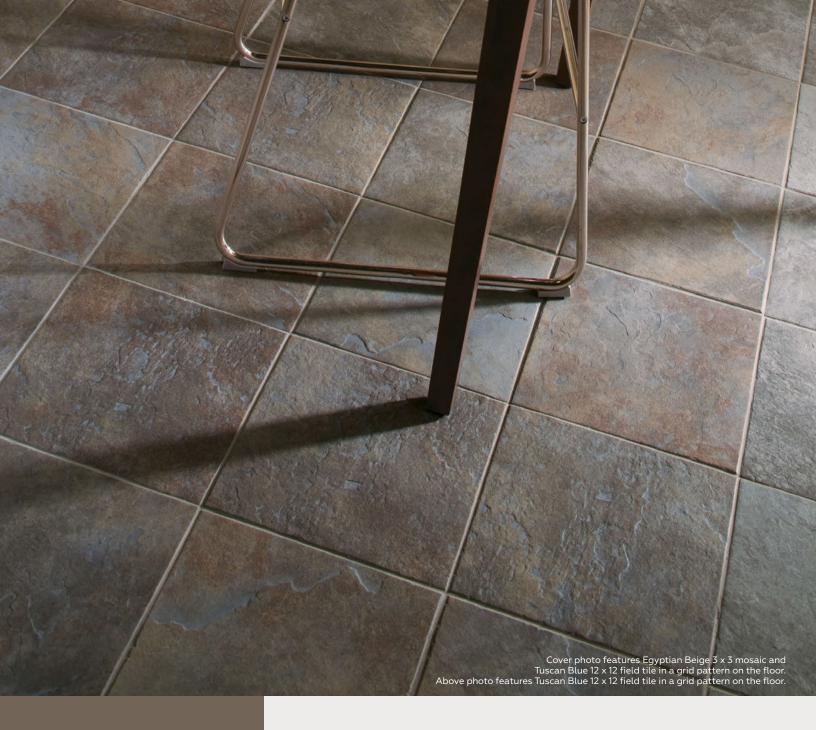

Get Inspired by the Natural Beauty of Slate

The intriguing colors and cleft surface of Continental Slate $^{\text{m}}$ are a near perfect recreation of natural slate. Its inspired tones have a high degree of shade variation, so they complement practically any décor.

• EARTHY INSPIRATION

- Design mimics the natural tones, shading and clefting of slate
- Durable option to natural slate

• NATURAL DESIGN OPTIONS

- Offered in modular sizes
- Available with coordinating mosaic and decorative accents



POST-CONSUMER RECYCLED MATERIALS



PRE-CONSUMER RECYCLED MATERIALS



MADE IN THE U.S.A.

All or select items within this series are made in the USA. For more information, visit daltile.com/ContinentalSlate.



CONTINENTAL SLATE™

COLORBODY™ PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC

FIELD TILE



BRAZILIAN GREEN CS52



INDIAN RED CS51



ENGLISH GREY CS57



PERSIAN GOLD CS54



TUSCAN BLUE CS56



ASIAN BLACK CS53



EGYPTIAN BEIGE CS50



MOROCCAN BROWN CS55

3 x 3 GLAZED CERAMIC MOSAIC



PERSIAN GOLD CS54



MOROCCAN BROWN CS55



EGYPTIAN BEIGE CS50



INDIAN RED CS51



BRAZILIAN GREEN CS52



ENGLISH GREY CS57



TUSCAN BLUE CS56



ASIAN BLACK CS53

CONTINENTAL SLATE™

COLORBODY™ PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC


DECORATIVE ACCENTS



CS70 4 x 12 DECORATIVE BORDER Egyptian Beige/Indian Red/Brazilian Green/Asian Black



CS71 4 x 12 DECORATIVE BORDER Egyptian Beige/Indian Red/Brazilian Green/Asian Black



CS74 4 x 12 DECORATIVE BORDER
Persian Gold/Tuscan Blue/Moroccan Brown



CS75 4 x 12 DECORATIVE BORDER Persian Gold/Tuscan Blue/English Grey



CS72 4 x 12 DECORATIVE BORDER Egyptian Beige/Brazilian Green/Asian Black

CONTINENTAL SLATE

COLORBODY™ PORCELAIN FLOOR & GLAZED CERAMIC MOSAIC

SIZES Thickness Sq. Ft. per Carton

4 x 12				
6 x 6 Field Tile	(5-13/16" x 5-13/16") (14.70 cm x 14.70 cm)	5/16"	11.00	44
12 x 12 Field Tile	(11-13/16" x 11-13/16") (30.00 cm x 30.00 cm)	5/16"	15.00	15
Field Tile	(45.20 cm x 45.20 cm)	3/10	16.00	0

(17-13/16" x 17-13/16")

20.00.
3 x 3 Mosaic (1 (Dot-mounted on a 12" x 24"

Field Tile

Decorative Border

18 x 18

(4" × 11-13/16")

(10.00 cm x 30.00 cm)

2" x 24" Sheet) 50.48 cm x 60.98 cm 1/4" 24.00 12 heet)

5/16"

E /16"

18 00

FLOOR APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior	N/A	✓
Wet & Level – Interior	≥ 0.42	✓
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest $^{\text{TM}}$, visit daltile.com/DCOF.

OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	√ *

APPLICATION NOTES:

* 6 x 6 field tile and mosaic only

Field tile suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

Mosaic suitable for exterior applications in non-freezing climates only when proper installation methods are followed.

TRIM

Pieces per

Carton

0

10

Туре	Number	Size	Pieces per Carton
Bullnose	S-43C9	3 x 12	30
Cove Base*	S-36C9T	6 x 12	30
Cove Base Outcorner*	SC-36C9T	1 x 6	15

^{*} Cove base and cover base outcorner are clay body ceramic, suitable for non-freezing climates only.

Floor bullnose, cove base, and cove base corner trim are intended to coordinate with floor field tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Field Tile : 3/16" Mosaics : 1/8" approximately	Random (V4)

TEST RESULTS

	ASTM#	Floor Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 3.0%
Breaking Strength	C648	> 275 lbs.	> 250 lbs.
Scratch Hardness	MOHS	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant
Abrasion Resistance	C1027	N/A	4

For additional information, visit daltile.com/information/TestResults.

NOTES

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Strong random shading enhances the natural beauty of this product. To achieve optimal results, tile should be selected from multiple cartons and shading arrangement planned prior to installation.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at daltile.com/Factors.





SCAN QR CODE FOR PRODUCT INFORMATION Get a QR Code reader at:

GET.DALTILE.COM



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.

