

DELEGATE™

STONE ATTACHÉ™ COLLECTION - COLORBODY™ PORCELAIN

Natural Geological Movement

Delegate represents a contemporary and versatile design option for today's spaces. The diagonal visual on this ColorBody™ porcelain tile is the subtle evidence of nature's powerful geological movements. Gentle color movement in the white and grey shades offer a slight visual distinction from the darker, monochromatic black hue. This sedimentary slate-inspired design offers a rich visual with depth and interest in two tile sizes − plus a 20 x 40 tile paver in 2 cm thickness suitable for exterior applications. Harmonize floor tile with a random linear mosaic or 3D brick-joint mosaic for a comprehensive stone look.

TECTONIC MOVEMENT

- Compressed slate visual in four stately shades: off white, light grey, dark grey and black
- The diagonal movement of slate in durable ColorBody[®] porcelain tile
- ELEVATED FLEXIBILITY
 - Two floor tile sizes plus a 20 x 40 tile paver in 2 cm thickness
 - Rectified edges for smaller grout joints
 - Random linear mosaic, 3D mosaic and trim package available



STONE LOOK

USAGI





COLINTERTOR



























NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL

DELEGATE™

STONE ATTACHÉ™ COLLECTION - COLORBODY™ PORCELAIN



20 x 40 Floor Tile 24 x 24 Floor Tile 12 x 24 Floor Tile

Random Linear Mosaic

FINISHES: MATTE

COLOR PALETTE









FLOOR TILE



OFF WHITE DL25





LIGHT GREY DL26*



BLACK DL28

RANDOM LINEAR MOSAIC



LIGHT GREY DL26





DARK GREY DL27

















WATERPROOF

STAINPROOF DENTPROOF

SCRATCH-RESISTANT

INDOOR/OUTDOOR

* Colors Available in 20 x 40 Pavers

DELEGATE

STONE ATTACHÉ™ COLLECTION - COLORBODY™ PORCELAIN

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
	(19-1/2" x 39-3/16") (49.50 cm x 99.50 cm)	13/16" (2 cm)	5.38	1
24 x 24 Floor Tile	(23-3/8" x 23-3/8") (59.44 cm x 59.44 cm)	5/16"	15.20	4
12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.01	9
Random Linear Mosaic * (Mesh-Mounted	(11-5/8" x 23-1/4" Sheet) (29.59 cm x 59.00 cm Sheet)	5/16"	7.76	4

- Available in DL26 and DL27 only.
- * Available in DL25, DL26 and DL27 only.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	~
Wet & Level – Interior Floor	≥ 0.42	~
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	√ *
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	~
Pool Linings	N/A	

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest", visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* 20 x 40 2 cm paver tile only







All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com

TRIM

Туре	Number	Size	Pieces/ Carton
Bullnose	43F9	3 x 24	10
Cove Base	S36C9T	6 x 12	20
Cove Base Outcorner	SC36C9T	1 x 6	10

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
----------------------------	-----------------

1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)



PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs > 1000 lbs (2cm)
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

Residential Bathrooms All Residential / Light Commercial

All Residential Areas All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.





7834 C.F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.







XTERIORS

ALL-WEATHER SOLUTIONS FOR EXTERIOR STYLE

ву daltile

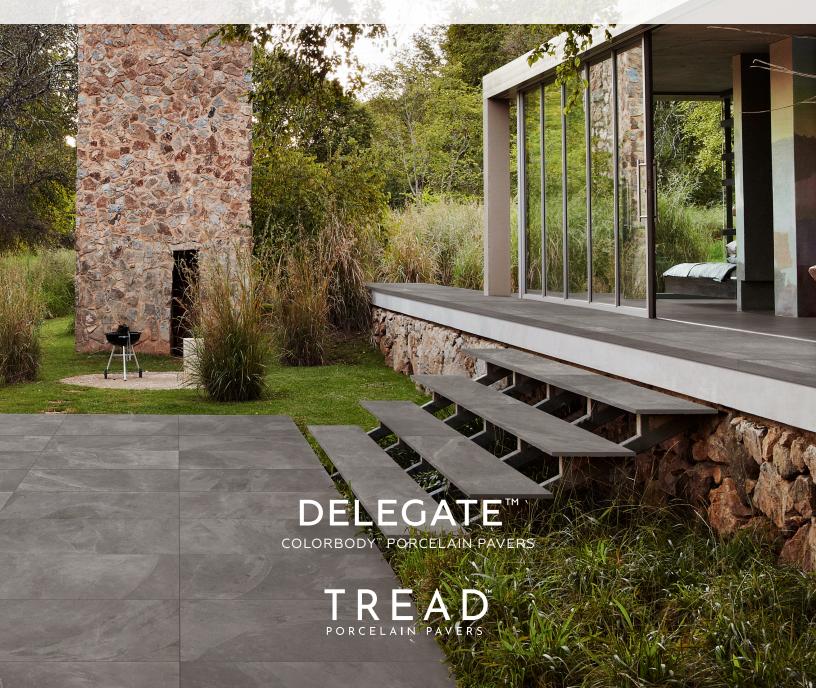

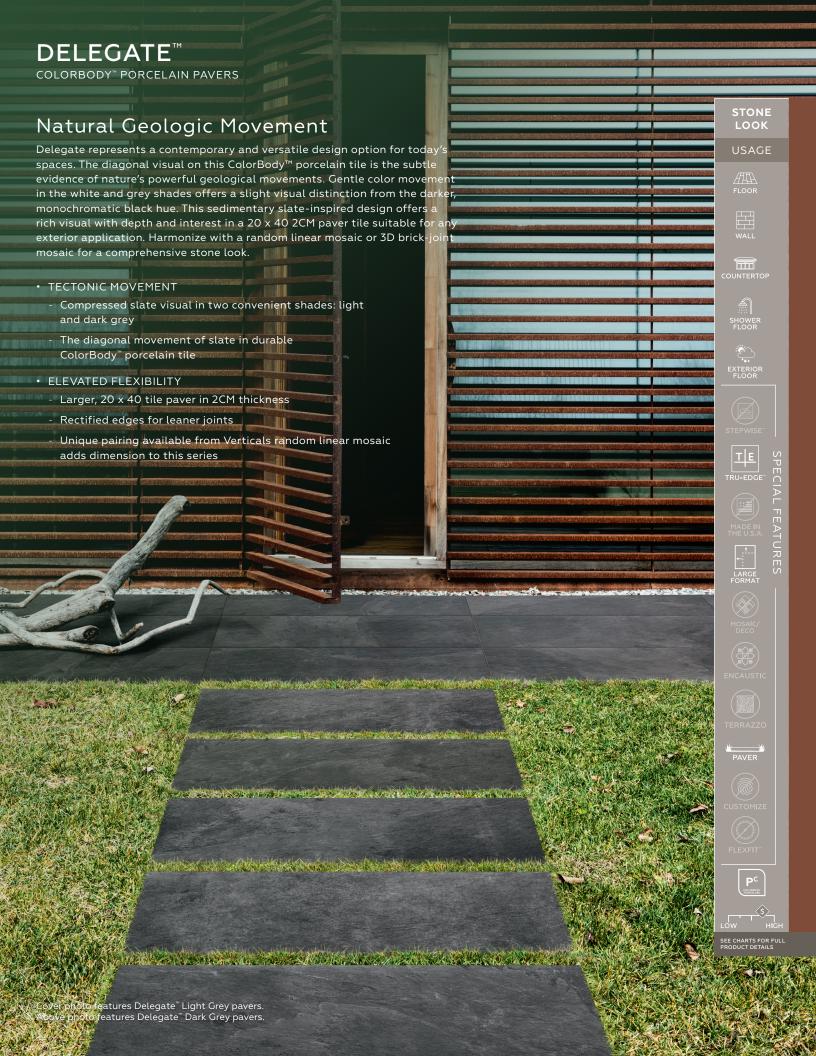



FINISHES: TEXTURED

COLOR PALETTE











DARK GREY DL27

















VISIT THE WHY TILE PAGE AT WWW.DALTILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

DELEGATE™

COLORBODY™ PORCELAIN PAVERS

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
20 x 40 Paver Tile	(19-1/2" x 39-3/16") (49.50 cm x 99.50 cm)	13/16" (2cm)	5.38	1

TRIM[†]

Туре	Notes
Rectified Step Nose	
Coping	— † Trim items available in many
Rectified Gutter	sizes and colors. Consult with your sales representative and/
Rectified Grid	or design team for specifics.
Rectified L-Kerb	

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	~
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest $^{"}$, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Dry Laying on Grass:	The gaps between the slabs should be chosen depending on the overall desired aesthetic.
Dry Laying on Gravel:	Gaps of at least 3/16" (4 mm) should be left between slabs, using spacers to set the correct width. Joint may be left empty or filled with fine sand, polymeric sand specifically formulated for porcelain tile or small, clean aggregate, depending on the joint width and desired aesthetic.
Dry Laying on Sand:	The gaps between the slabs should be chosen depending on the overall desired aesthetic.
Laying on Screed with Adhesive:	Slabs must be laid with open joints of variable width of no less than 3/16" (5 mm).
Raised Pavings:	Pedestal contains correct tile spacers for application.

SHADE VARIATION

DL26, DL27



High (V3) - Some Variation from Tile to Tile, and within each Tile

PERFORMANCE CHARACTERISTICS

	ASTM#	Paver Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 1000 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.







