

FIELD TILE ABRASIVE SURFACE



DIABLO RED 0T01 1



ASHEN GRAY
0T03 2




ADOBE BROWN
0T05 2




SAHARA SAND
0T08 2


FIELD TILE NON ABRASIVE SURFACE

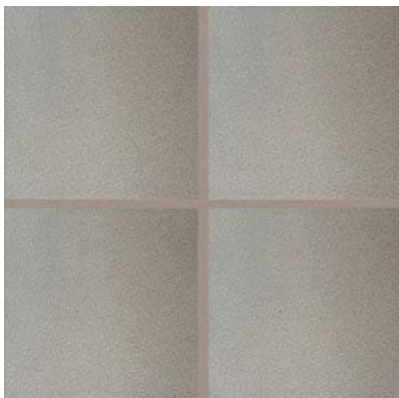

ASHEN FLASH 0T04 2

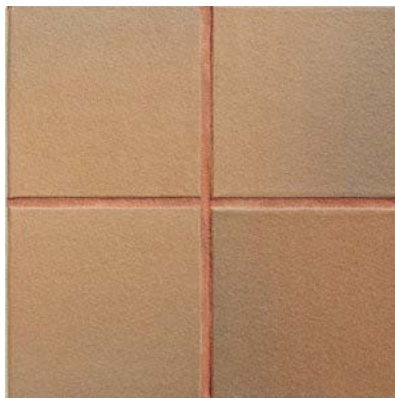

ADOBE FLASH 0T06 2

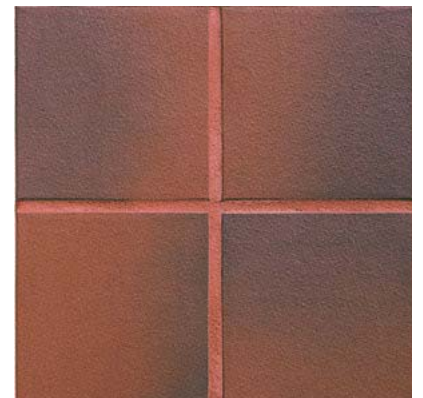

RED FLASH 0T02 1

Texture Notes:

Abrasive surface available in 6 x 6 and 8 x 8 sizes in 0T01, 0T03, 0T05, 0T08 colors only.

Abrasive surface available in 4 x 8 size in 0T01 and 0T03 on a made-to-order basis.

(1), (2) indicate price groups,
(1) being the least expensive



PRE-CONSUMER
RECYCLED MATERIALS






MADE IN THE U.S.A.

All or select items within this series are made in the USA.
For more information, visit daltile.com/QuarryTextures.

QUARRY TEXTURES™

QUARRY TILE

SIZES

			Thickness	Sq.Ft. per Carton	Pieces per Carton
	8 x 8 Field Tile†	(8" x 8") (20.30 cm x 20.30 cm)	1/2"	11.1	25
	6 x 6 Field Tile†	(6" x 6") (15.20 cm x 15.20 cm)	1/2"	11.0	44
	4 x 8 Field Tile†	(4" x 8") (10.20 cm x 20.30 cm)	1/2"	10.76	50

† Abrasive surface available in 6 x 6 and 8 x 8 sizes in OT01, OT03, OT05 and OT08 colors only.

† Non-abrasive surface in 4 x 8 size available in all colors. Abrasive surface available in 4 x 8 size in OT01 and OT03 colors on a made-to-order basis.

FLOOR APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level- Interior	N/A	✓
Wet & Level- Interior	0.42	✓
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	0.60	✓
Subject to Oils	0.60	✓
Ramps & Inclines	0.65	✓*

A DCOF value of 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSIA 1371-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	✓**

APPLICATION NOTES:

* Abrasive surface only

** 6 x 6 field tile only









Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

Suitable for industrial installation requiring high compressive strength. We do not recommend light colored quarry tile in commercial kitchens unless properly sealed or a grout release is used. It is necessary to follow the proper procedures and recommendations from the grout and maintenance products manufacturers.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/8"	 High (V3) - non-Flash colors  Random (V4) - Flash colors

TRIM

	Type	Number	Size	Pieces per Carton
	Bulhose	Q-1665*	6 x 6	44
	Bulhose Corner	Q-CRL-1665*	6 x 6	44
	Cove Base	Q-3565 v	5 x 6	44
	Cove Base Outcorner	Q-CR-L-3565 v	5 x 6	20
	Cove Base Inside Corner	Q-B-3565 v	1 x 5	25
	Cove Base	Q-3585 v	5 x 8	24
	Bulhose	Q-1885	8 x 8	25
	Bulhose Corner	Q-CRL-1885	8 x 8	25

* Available in abrasive surface

v Not available in Flash colors; use coordinating solid color.

For bulhose, cove base, and cove base corner trim are intended to coordinate with floor field tile in the standard 90-degree installation position.

TEST RESULTS

	ASTM #	Abrasive and Non-Abrasive Result
Water Absorption	C373	< 3.0%
Breaking Strength	C648	> 400 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant

NOTES

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSIA 1371 standards.

Water, oil, grease, etc. create slippery conditions. For applications with exposure to these conditions require extra caution in product selection. Suitable for use on ramps when ordered with abrasive only.

For additional information, refer to "Factors to Consider" at www.daltile.com/factors.



DESIGNED TO HELP EARN LEED™ CREDENTIALS. Form one detailed information, visit daltilegreenworks.com.

SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GETDAL TILE.COM



7834 C.F. Hawin Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

© 2016 Dal-Tile Corporation 8/16