


WALL

MULTITUDE™ GLAZED CERAMIC



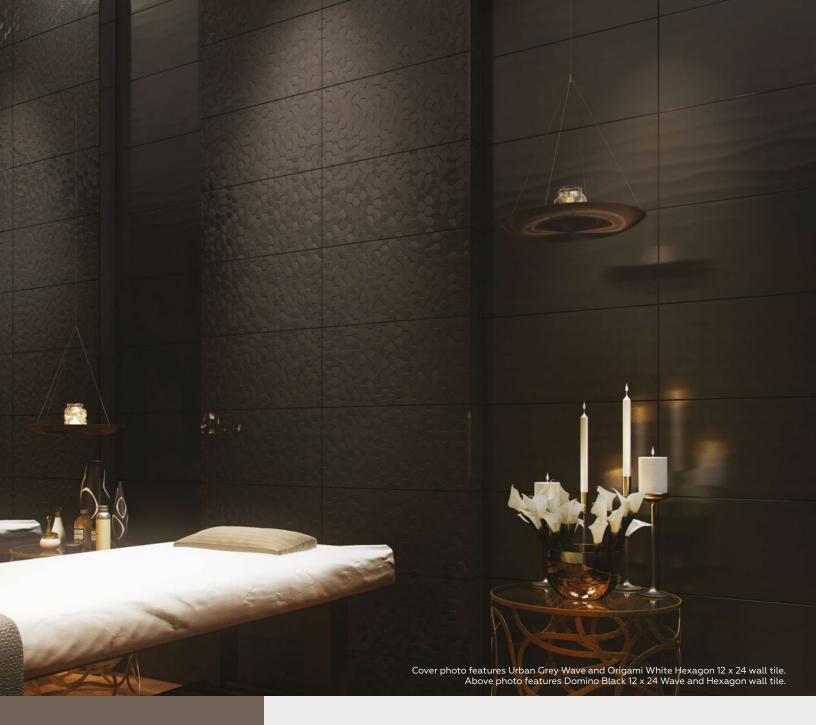

A Marvelous Canvas of Color and Texture With a subtle finish and pronounced patterns, Multitude™ tile gives you a different look at every glance. It differentiates itself with a combination of rich colors and a 3-D pinstriped graphic that underlies flat, hexagonal and wave patterns. Offered in five vibrant colors and a large modern size, this design adds depth and character to any room.

MODERN DESIGN

- Alluring textures provide visual depth and interest
- Customize your wall design with this series of distinctive, coordinating combinations

ENDLESS FLEXIBILITY

- Offered in large modern 12 x 24 tile size
- Five-color palette easily coordinates with any room
- 3-D pinstripe graphic underlies flat, hexagonal and wave patterns that continue seamlessly from one tile to the next

POST

POST-CONSUMER RECYCLED MATERIALS

PRE-CONSUMER RECYCLED MATERIALS



TRU-EDGE



VISUAL IMAGING™

WALL TILE (Shown in Flat) WALL TILE (Shown in Wave) WALL TILE (Shown in Hexagon) ORIGAMI WHITE MU16 ORIGAMI WHITE MU16 ORIGAMI WHITE MU16 Close-up of tile MODERN KHAKI MU17 MODERN KHAKI MU17 Close-up of tile URBAN GREY MU18 URBAN GREY MU18 URBAN GREY MU18 Close-up of tile NOSTALGIC BLUE MU19 NOSTALGIC BLUE MU19 Close-up of tile

DOMINO BLACK MU20

Close-up of tile

DOMINO BLACK MU20

DOMINO BLACK MU20

MULTITUDE™

GLAZED CERAMIC

SIZES

		Thickness	Sq. Ft. per Carton	Pieces per Carton
	(11-3/4" x 23-3/4") (29.90 cm x 60.42 cm)	5/16"	15.52	8

APPLICATIONS

	Suitable	
Floors		
Walls/Backsplashes	✓	
Countertops		
Pool Linings		

APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates only when proper installation methods are followed.

JOLLY TRIM - SOLID COLORS

ORIGAMI WHITE MU21

MODERN KHAKI MU22

URBAN GREY MU23

NOSTALGIC BLUE MU24

DOMINO BLACK MU25

TRIM

Туре	Number	Size	Pieces per Carton
12" Jolly	S-1/212J	1/2 x 11-15/16	12

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (when used in a staggered brick-joint pattern; overlap should not exceed 33%)*	Low (V1)

TEST RESULTS

ASTM#	Result
C373	< 20.0%
C648	120-230 lbs.
MOHS	4.0-6.0
C650	Resistant
	C373 C648 MOHS

NOTES

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at daltile.com/Factors.





