



FLOOR

P'ZAZZ™

COLORBODY™ PORCELAIN

 **daltile®**
IMAGINE WHAT'S POSSIBLE™



Cover and above photos feature P'Zazz™ Gold Glam 12 x 24 in a grid pattern on the floor.

Energize your space with Elegant Brilliance

Sometimes your space needs a little something extra to stand out from the crowd. P'Zazz will give you just that—a subtle hint of shine that makes you stop and take notice. Rich colors give this series an elegant feel and its shimmering surface will give any space the glamour it deserves.

- LUSTER LOOK
 - Contemporary textured fabric style
 - Unique subtle shimmering surface
- BRILLIANT POSSIBILITIES
 - Offered in 6 glimmering colors in warm and cool hues
 - Coordinating solid and blended mosaics available

 LINEAR OPTIONS

 TRU-EDGE

All or select items within this series meet the requirements for these qualifications. For more product information, visit daltille.com.


CERTIFIED PORCELAIN TILE
0.5% or less water absorption

Professional
TILE SOLUTIONS

FLOOR

P'ZAZZ™

COLORBODY™ PORCELAIN

FLOOR TILE



WHITE RITZ P261 (2)




BEIGE FLAIR P262 (1)



TAN DAZZLE P263 (1)



GOLD GLAM P264 (1)

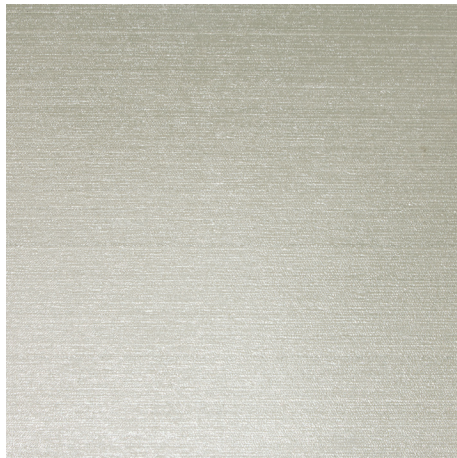

GRAY SHIMMER P265 (1)



BLACK DRAMA P266 (2)

(1) and (2) indicate Price Group, (1) being the least expensive.

FLOOR

P'ZAZZ™


COLORBODY™ PORCELAIN

MOSAICS



COOL BLEND P267 MOSAIC (2)

COMPONENTS



WHITE RITZ



BLACK DRAMA



GRAY SHIMMER



WARM BLEND P268 MOSAIC (1)

COMPONENTS



BEIGE FLAIR



GOLD GLAM



TAN DAZZLE






(1) and (2) indicate Price Group, (1) being the least expensive.

FLOOR

P'ZAZZ™


COLORBODY™ PORCELAIN

SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	12 x 24 Floor Tile	(11-3/4" x 23-9/16") (29.80 cm x 59.80 cm)	3/8"	15.49	8
	6 x 24 Floor Tile	(5-13/16" x 23-9/16") (14.80 cm x 59.80 cm)	3/8"	10.65	11
	12 x 12 Floor Tile	(11-3/4" x 11-3/4") (29.80 cm x 29.80 cm)	3/8"	10.65	11
	2 x 2 Mosaic (Mesh-mounted on 1' x 1' Sheet)	(11-3/4" x 11-3/4" Sheet) (29.80 cm x 29.80 cm Sheet)	3/8"	10.65	11
	1 x 2 Mosaic† (Mesh-mounted on 1' x 1' Sheet)	(11-3/4" x 11-3/4" Sheet) (29.80 cm x 29.80 cm Sheet)	3/8"	10.65	11

† Available in two unique color blends only.

LINEAR OPTIONS™ SIZES

		Sq. Ft. Per Carton	Pieces Per Carton
	2 x 24 Field Tile	(1-15/16" x 23-9/16") (4.92 cm x 59.80 cm)	6.66

Additional linear and rectangular sizes are also available.

FLOOR APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior	N/A	✓
Wet & Level – Interior	≥ 0.42	✓*
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	✓**




APPLICATION NOTES:

*Floor tile and mosaic suitable. Mosaic also suitable for residential and light commercial shower floors.

**Mosaic only


Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

TRIM

Type	Number	Size	Pieces Per Carton
 Bullnose	S-43C9	3 x 12	33
 Cove Base	P-36C9T	6 x 12	22
 Cove Base Outcorner	PC-36C9T	1 x 6	15

Bullnose, cove base, and cove base corner trim are intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern and/or when tile with a length 15" or greater is installed in a staggered brick-joint pattern. Overlap should not exceed 33%)	 Medium (V2)

TEST RESULTS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 450 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

NOTES

Special consideration must be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information, refer to "Factors to Consider" at daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DALTILE.COM



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2017 Daltile (3/17)