


WALL TILE



GLOSS WHITE PL02

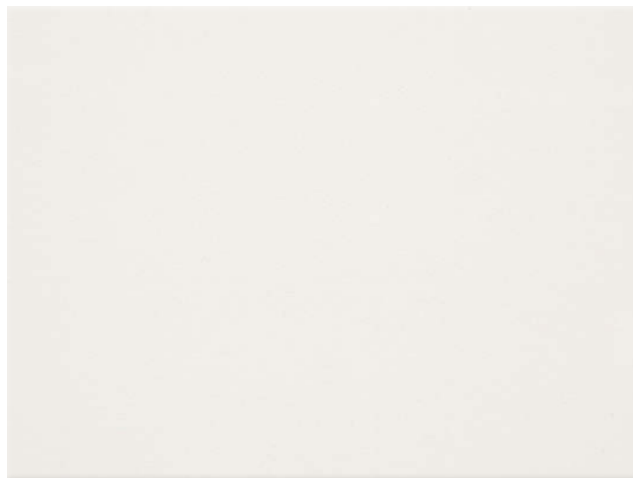

GLOSS ALMOND PL22

DECORATIVE ACCENTS



ASTRID BLANCO PL42
4 x 8 Accent Strip



GLOSS WHITE PL02
1/2 x 8 Rope Liner



GLOSS ALMOND PL22
1/2 x 8 Rope Liner

Unique Decorative Series for a Simple, Classic Look

Polaris glazed tile is offered in pure white and creamy almond colors. Featuring a rope liner, decorative accent strip, and two wall tile sizes, Polaris creates a unique decorative series for walls and backsplashes. This is the perfect line to refresh any bathroom or kitchen space.

- CLASSIC STYLE
 - Adds traditional look to space design
 - Ideal for walls and backsplashes
- DECORATIVE OPTIONS
 - Offered in two classic colors and two wall sizes
 - Coordinating rope liners and accent strip available



**POST-CONSUMER
RECYCLED MATERIALS**



**PRE-CONSUMER
RECYCLED MATERIALS**

SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	12 x 18 Wall Tile	(12" x 18") (30.52 cm x 45.77 cm)	5/16"	16.42	10
	9 x 12 Wall Tile	(9" x 12") (22.91 cm x 30.54 cm)	5/16"	11.25	15
	4 x 8 Accent Strip*	(4" x 8") (10.00 cm x 20.30 cm)	5/16"	--	20
	1/2 x 8 Rope Liner	(1/2" x 8") (1.30 cm x 20.30 cm)	5/16"	--	12

* Available in Astrid Blanco PL42 only






APPLICATIONS

	Suitable
Floors	
Walls/Backsplashes	✓
Countertops	
Pool Linings	


APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates only when proper installation methods are followed.

TRIM

	Type	Number	Size	Pieces per Carton
	Wall Bullnose	S-43C9WL (12" side)	3 x 12	22
	Wall Bullnose	S-4309 (9" side)	3 x 9	54
	Wall Bullnose Corner	SN-4309	3 x 3	32
	Wall Bullnose	S-4269 (6" side)	2 x 6	100
	Wall Bullnose Corner	SN-4269	2 x 2	250

INSTALLATION

Grout Joint Recommendation	Shade Variation
9 x 12: 1/16"	
12 x 18: 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%)	 Low (V1)

TEST RESULTS

	ASTM#	Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120-230 lbs.
Scratch Hardness	MOHS	4.0-6.0
Chemical Resistance	C650	Resistant

NOTES

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DALTILE.COM



7834 C. F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



©2016 Dal-Tile Corporation (2/16)