



WALL

RITTENHOUSE SQUARE™
GLAZED CERAMIC

 **daltile®**
IMAGINE WHAT'S POSSIBLE™



Photo features Elemental Tan 3 x 6 wall tile on the kitchen backsplash. Cover photo features Arctic White 3 x 6 wall tile on the sink backsplash.

Classic Elegance

Fall in love with the time-honored look of Rittenhouse Square. This trendy, yet enduring collection has a color palette vast enough to fit any style.

- DESIGN VERSATILITY
 - Subway tile that works with traditional or modern design styles
 - Vast color palette works with a multitude of color schemes
- COORDINATING OPTIONS
 - Coordinating brick-joint mosaic and trim available
 - Colors coordinates with Modern Dimensions™ and Semi-Gloss™ and Matte™ lines, offering more design options




**PRE CONSUMER
RECYCLED MATERIALS**

RITTENHOUSE SQUARE™

GLAZED CERAMIC

SEMI-GLOSS

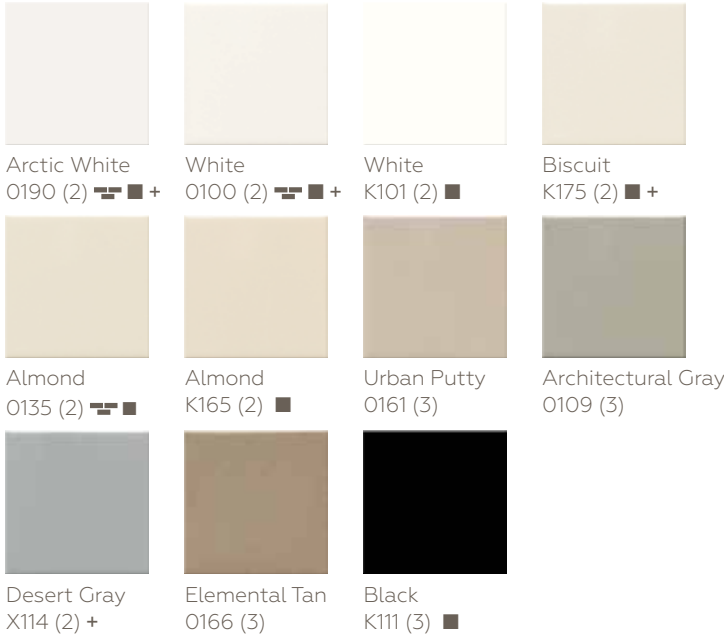

MATTE



BEVEL WALL TILE



Arctic White 0190

White 0100




Biscuit K175



Desert Gray X114

MADE-TO-ORDER COLORS

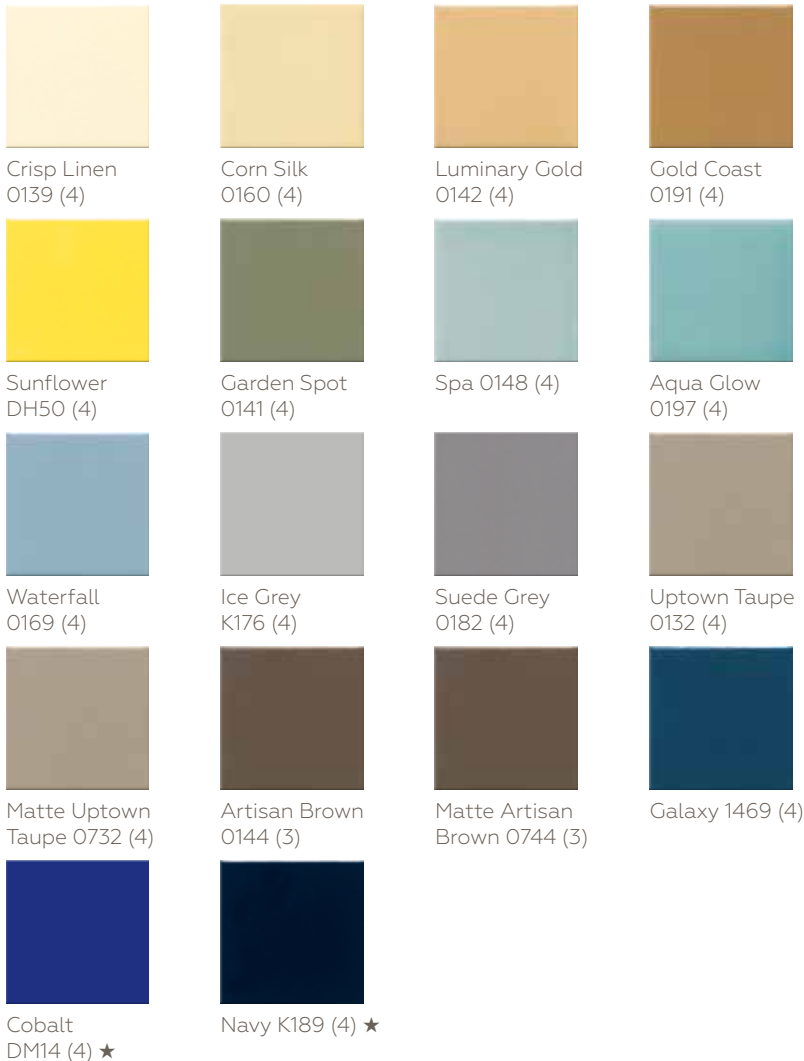

DECORATIVE ACCENTS



Classic
(Available in White K101,
Almond K165 and
Translucent Almond RT01)



Wave
(Available in White K101,
Almond K165 and
Translucent Almond RT01)



Shelf Rail
(Available in White K101
and Almond K165)

(1), (2), (3), (4) and (5) indicate Price Groups, (1) being the least expensive.

All colors available in 3 x 6 flat wall tile.

Made-to-order colors require 6-8 weeks for delivery from date of order.

■ 2 x 4 brick-joint size available. Other colors (including matte finish) available via special order (not available in group 4 colors).






■ Shelf Rail available
+ 3 x 6 Bevel tile available; other colors available through ColorMatch™.

★ Subject to crazing; black grout not recommended.

RITTENHOUSE SQUARE™

GLAZED CERAMIC

SIZES

| | | | Thickness | Sq. Ft. per Carton | Pieces per Carton |
|----------------------------------------------------------------------------------|----------------------------------------|--------------------------------------------------|-----------|--------------------|-------------------|
|  | 3 x 6 Wall Tile | (3" x 6") (7.60 cm x 15.20 cm) | 5/16" | 12.50 | 100 |
|  | 3 x 6 Bevel Wall Tile | (3" x 6") (7.60 cm x 15.20 cm) | 3/8" | 10.40 | 80 |
|  | 2 x 4 Brick-joint mosaic (Dot-mounted) | (12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet) | 1/4" | 10.00 | 12 |
|  | 3 x 6 Wave Accent | (3" x 6") (7.60 cm x 15.20 cm) | 5/16" | -- | 18 |
|  | 3 x 6 Classic Accent | (3" x 6") (7.60 cm x 15.20 cm) | 5/16" | -- | 16 |
|  | 2 x 6 Shelf Rail | (2-3/16" x 6") (5.50 cm x 15.20 cm) | -- | -- | 8 |
|  | 2 x 2 Shelf Rail Corner | (2-3/16" x 2-3/16") (5.50 cm x 5.50 cm) | -- | -- | 12 |

APPLICATIONS

| | Suitable |
|--------------------|----------|
| Floors | |
| Walls/Backsplashes | ✓ |
| Countertops | ✓*▲ |
| Pool Linings | ✓ |






APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates only when proper installation methods are followed.


* Beveled and semi-gloss tile not suitable for countertops.

▲ Darker colors may show scratches

TRIM

| Type | Number | Size | Pieces per Carton |
|-----------------------------------------------------------------------------------|------------------------|-------|-------------------|
|  | S-4369 (on 6" side) | 3 x 6 | 100 |
|  | S-4639 (on 3" side) | 3 x 6 | 100 |
|  | SCR/L-4369 | 3 x 6 | 100 |
|  | A-3361 | 3 x 6 | 36 |
|  | SCR/L-3361 | 3 x 6 | 36 |

INSTALLATION

| Grout Joint Recommendation | Shade Variation |
|-------------------------------------|----------------------------------------------------------------------------------------------|
| Wall Tile : 1/16" Mosaics : 1/8" |  Low (V1) |

TEST RESULTS

| | ASTM# | Wall Result | Mosaic Result |
|---------------------|-------|----------------|---------------|
| Water Absorption | C373 | < 20.0% | < 3.0% |
| Breaking Strength | C648 | 120 - 230 lbs. | > 250 lbs. |
| Scratch Hardness | MOHS | 4.0 - 6.0 | 6.0 - 7.5 |
| Chemical Resistance | C650 | Resistant | Resistant |

For additional information, visit daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DAL TILE.COM



7834 C. F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2015 Dal-Tile Corporation (10/15)