



WALL

AMITY™  
GLASS WALL & MOSAIC

 daltile®  
IMAGINE WHAT'S POSSIBLE™

# AMITY™

GLASS WALL & MOSAIC

## Elevate With Inviting Accents

Come home to effortless design with the sleek glass wall tile and mosaic collection, Amity™. Offered in two modern shapes, Amity is a clean-lined choice for backsplashes and decorative accents. While giving a nod to a vintage aesthetic, Amity brings a contemporary update to your home with monochromatic colors in an inviting neutral palette.

- DÉCOR OPPORTUNITY
  - Features trendy monochromatic colors
  - Available in a 3 x 6 glass wall tile and a glass random linear mosaic
- MODERN UPDATES
  - Crafted from smooth, sheen glass
  - A neutral backdrop for surrounding décor



Cover and above photo feature Amity™ Taupe, 2 x 2 Random Linear Mosaic on the wall.

WALL

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



G  
GLASS

LOW HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

SPECIAL FEATURES

SIZES:



3 x 6  
Wall Tile



Random Linear  
Mosaic

FINISHES: GLOSSY

COLOR PALETTE



WHITE




TAUPE




GREY


3 x 6 GLASS WALL TILE\*

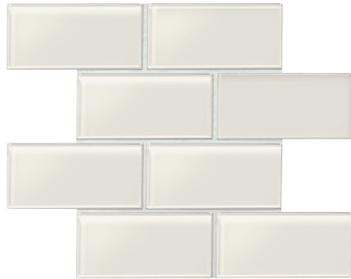

WHITE AM50

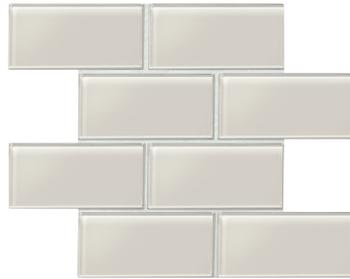


TAUPE AM51




GREY AM52

\* 3 x 6 wall tile sold individually  
by the piece.


RANDOM LINEAR MOSAIC

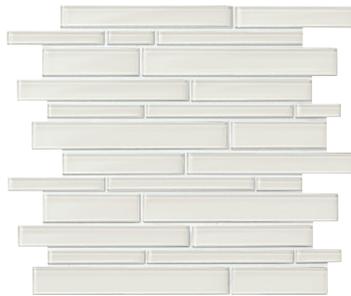

WHITE AM50

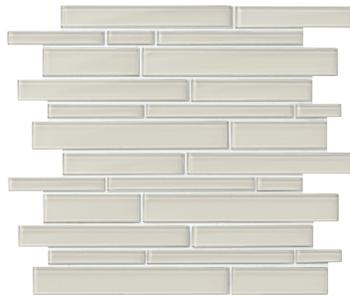

TAUPE AM51



GREY AM52



WATERPROOF



STAINPROOF



DENTPROOF



FIRE-RESISTANT™  
\*Not Applicable to Mesh-Mounted  
Mosaics



SIMPLICLEAN™

## SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	3 x 6 Wall Tile	(2-7/8" x 5-13/16") (7.28 cm x 14.75 cm)	3/16"	6.00	50
	Random Linear Mosaic (Mesh-mounted)	(11-7/16" x 13-7/8") (29.03 cm x 35.23 cm)	3/16"	13.95	15

## APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltille.com/DCOF](https://daltille.com/DCOF).

### APPLICATION NOTES:

Wall tile and mosaic suitable for interior applications only (provided it is noted as suitable in the applications chart above).

## INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" Approximately	 Low (V1)

## PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 100 lbs
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [daltille.com/information/TestResults](https://daltille.com/information/TestResults).

## NOTES

Since there are variations in all glass products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.2 standards. For additional information refer to "Factors to Consider" at: [daltille.com/Factors](https://daltille.com/Factors).

Use of a latex modified thin-set is recommended for installation.