



FLOOR

IRONCRAFT™

COLORBODY™ PORCELAIN with REVEAL IMAGING®

 **daltile®**
IMAGINE WHAT'S POSSIBLE™



Cover photo features Ironcraft™ Charcoal Gray and Rusted Bronze light polished 12 x 24 on the floor and Ironcraft™ Charcoal Gray and Rusted Bronze unpolished 12 x 24 on the wall. Above photo features Ironcraft™ Charcoal Gray and Rusted Bronze light polished 12 x 24 on the wall.

Historic Strength Redefined

Walking through old factories and warehouses, one is reminded of centuries past – an era of the rugged, industrial artisan. Ironcraft™ owes its roots to the American craftsman who inspired this collection. This porcelain tile resembles bare concrete, brushed and burnished with oxidized metals. Ironcraft is the perfect surface for lofts, studios and chic industrial spaces.

- URBAN APPEAL
 - Sweeping iron and cement graphics for striking lines and dimension
 - Dual texture treatment achieves a daring contrast
 - Available in unpolished and light polished finishes
- ARTISAN'S TOOLBOX
 - Tile and 2 x 2 mosaic available in five modern metallic colors
 - Featured in three floor tile sizes
 - Random interlocking mosaic available in three color blends, combining light polished and unpolished finishes

 **PRE-CONSUMER RECYCLED MATERIALS**

 **MADE IN THE U.S.A.**

 **REVEAL IMAGING®**

 **TRU-EDGE™**


All or select items within this series meet the requirements for these qualifications. For more information visit daltile.com.

 **CERTIFIED RECELAIN™ TILE**
0.9% OF DALL WATER RESISTANT

USAGE

Floors	Walls	Countertops
F	W	C

FLOOR TILE

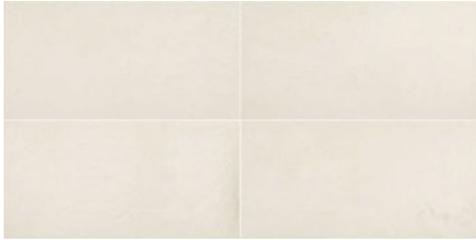

PHOSPHOR WHITE IC11



CASPER GREY IC12



CHARCOAL GREY IC13



RUSTED BRONZE IC14



SABLE BLACK IC15

RANDOM INTERLOCKING MOSAIC*



PHOSPHOR GREY IC16



GREY BLACK IC17



SABLE BRONZE IC18

* Available in three unique color blends only with a random mix of light polished and unpolished pieces. Visit daltille.com/ironcraft for more information.

2 x 2 MOSAIC (Unpolished Only)



PHOSPHOR WHITE IC11



CASPER GREY IC12



CHARCOAL GREY IC13



RUSTED BRONZE IC14



SABLE BLACK IC15

IRONCRAFT™

COLORBODY™ PORCELAIN with REVEAL IMAGING®

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 24 Floor Tile	(23-5/8" x 23-5/8") (59.44 cm x 59.44 cm)	3/8"	15.20	4
	12 x 24 Floor Tile	(11-5/8" x 23-5/8") (29.56 cm x 59.44 cm)	3/8"	15.12	8
	2 x 2 Mosaic (Mesh-mounted) (Unpolished Only)	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	3/8"	10.00	10
	Random Interlocking Mosaic (Mesh-mounted)	(15" x 12" Sheet) (38.10 cm x 30.48 cm Sheet)	3/8"	7.00	7

■ Available in three unique color blends only with a random mix of light polished and unpolished pieces. Visit daltile.com/Ironcraft for more information.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓**

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Mosaics and floor tile are suitable for many residential and commercial floors; in addition, mosaics are also suitable for residential and light commercial shower floors.

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

* Unpolished floor tile and mosaics suitable.

** 2 x 2 mosaic tile only.

TRIM

	Type	Number	Size	Pieces/ Carton
	Bullnose	P-43C9	3 x 12	30
	Cove Base	P-36C9T	6 x 12	22
	Cove Base Outcorner	PC-36C9T	1 x 6	15

Bullnose, cove base and cove base corner trim are available in unpolished finish only. Bullnose in light polished finish is available through special order with extended lead time.

Floor bullnose and cove base trim are intended to coordinate with floor tile in the standard 90-degree installation position.

Cove base and cove corner trim are suitable for non-freezing climates only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%)	 Random (V4)
Mosaic: 1/8"	

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.

SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DALTILE.COM



7834 C. F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2017 Daltile (4/17)