



DECORATIVE

ILLUMINARY™

GLASS MOSAICS & LINERS

 **daltile**®
IMAGINE WHAT'S POSSIBLE™



Cover photo features Illuminary™ Sandbar modified herringbone mosaic and Bronze 3/4 x 8 bar liner on the wall.
Above photo features Illuminary™ Kindle Blend accordion mosaic on the wall.

Captivating Iridescence

Step beyond ordinary and create an unforgettable feature wall with Illuminary™. With its mesmerizing hues and calming influence, Illuminary creates walls with beguiling glamour. Available in three unique mosaic patterns, comprised of eight iridescent color blends and four solid colors, complimented by three decorative liners, Illuminary elevates any space. Modified Herringbone, Accordion and Oscillating mosaics feature a parallelogram assembled in three beautiful patterns, which can be effortlessly paired with a coordinating decorative liner.

- AN EYE FOR INTRIGUE
 - Parallelogram assembled in three unique mosaic patterns
 - Mosaics available in eight iridescent color blends and four solid colors
 - Liners available in six solid colors
- ENLIGHTENED DESIGN
 - Three mosaic patterns: Modified Herringbone, Accordion and Oscillating
 - Three decorative liner designs: Bar, Convergent and Twist



POST-CONSUMER RECYCLED MATERIALS



PRE-CONSUMER RECYCLED MATERIALS

All or select items within this series meet the requirements for these qualifications. For more information visit daltile.com.

USAGE

Floors

Walls


Countertops



W




OSCILLATING MOSAIC

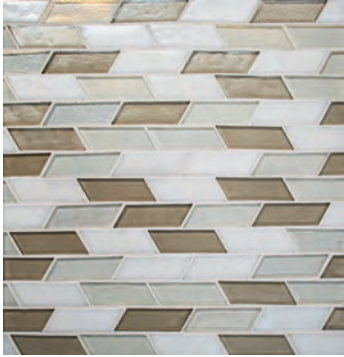


ALLUSION BLEND IL96



WHISPER BLEND IL99

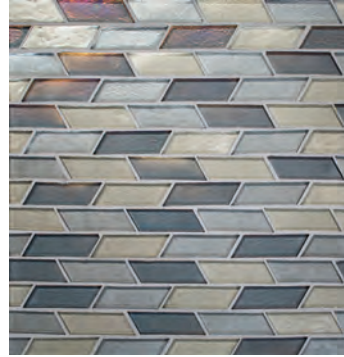

RADIANCE BLEND IL97

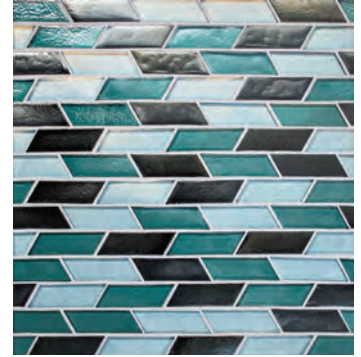

TOPIARY BLEND IL98

ACCORDION MOSAIC




WISP BLEND IL94



ILLUSTRIOUS BLEND IL95



SERENATA BLEND IL93

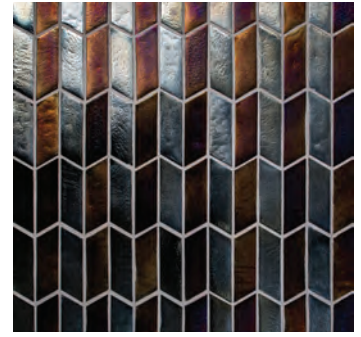

KINDLE BLEND IL92

MODIFIED HERRINGBONE MOSAIC




ICICLE IL01



SILVERLIGHT IL03



SANDBAR IL04

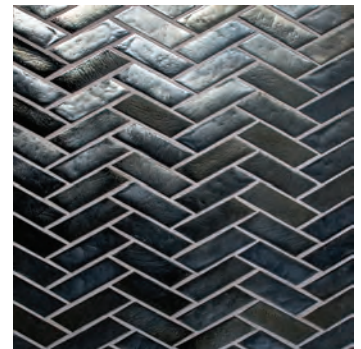

PEWTER IL06

DECORATIVE

ILLUMINARY™

GLASS MOSAICS & LINERS

3/4 x 8 BAR LINER



IICLE IL01



DOVE IL02



SILVERLIGHT IL03



SANDBAR IL04



BRONZE IL05



PEWTER IL06

1 x 8 CONVERGENT LINER



1 x 8 TWIST LINER










Photo features Illuminary™ Sandbar modified herringbone mosaic and Bronze 3/4 x 8 bar liner on the wall.

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	Oscillating Mosaic (Paper-face mounted)	(11-3/16" x 11-1/2" Sheet) (28.40 cm x 29.30 cm Sheet)	1/4"	13.50	15
	Accordion Mosaic (Paper-face mounted)	(11-1/2" x 11-1/8" Sheet) (29.30 cm x 28.40 cm Sheet)	1/4"	13.35	15
	Modified Herringbone Mosaic (Paper-face mounted)	(11-5/8" x 11-7/16" Sheet) (29.60 cm x 29.10 cm Sheet)	1/4"	13.80	15
	3/4 x 8 Bar Liner	(3/4" x 7-7/8") (2.00 cm x 20.10 cm)	1/2"	N/A	60
	1 x 8 Convergent Liner	(1-1/8" x 7-7/8") (2.90 cm x 20.00 cm)	1/2"	N/A	30
	1 x 8 Twist Liner	(1-1/4" x 7-3/4") (3.20 cm x 19.70 cm)	5/16"	N/A	30

APPLICATIONS



	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	✓
Pool Tank/Submerged	N/A	✓

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Liners: 1/8"	 High (V3)
Mosaics: 1/16"	 Random (V4)*

* Oscillating Mosaic

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	≥ 350 lbs
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Since there are variations in all glass products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.2 standards.

Use of a white latex modified thin-set is recommended for installation.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.



7834 C.F. Hawn Freeway,
 Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2017 Daltile (10/17)